

Technical data

Paper web width:
Min.: 6.5" (165 mm)
Max.: 20.5" (521 mm)

Permissible operating conditions:
Ambient temperature: 10 °C to 32 °C
Relative humidity: 15% to 85%

Paper weight: 50–180 g/m²

Optimum range according to the paper specification:
Ambient temperature: 18 °C to 24 °C
Relative humidity: 40% to 60%

Electrical power supply: 208/240 V +6%/–10%
2LPE 50/60Hz

230 V +6%/–10%
LNPE 50/60Hz

Weight:
VU6-800: 30 kg
VU6-1600: 45 kg



Attention!
Power supply 208V, two lines / earth

Noise information:
Sound pressure level after EN 13023: — dB (A)

Rated current: 1 A

Effective output: 240 W

Apparent output: 240 VA

Fusing: 10 AT

Heat dissipation: 820 BTU/h 865 kJ/h

Dimensional drawing

VU6-800

User area and max. paper web width



User area

* max. paper web width

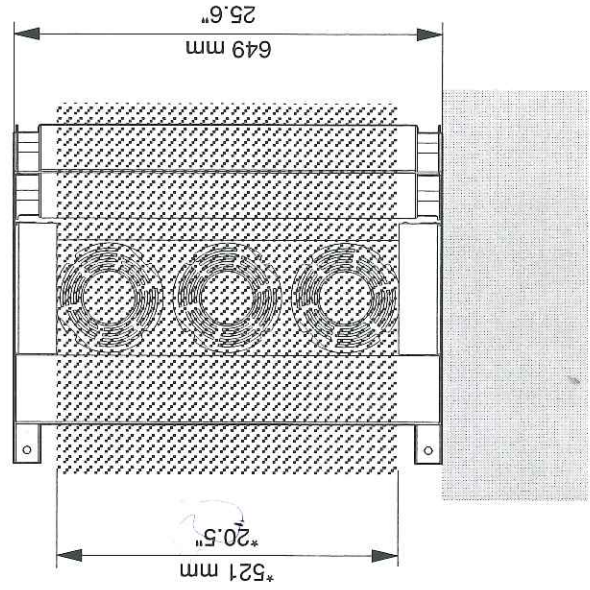
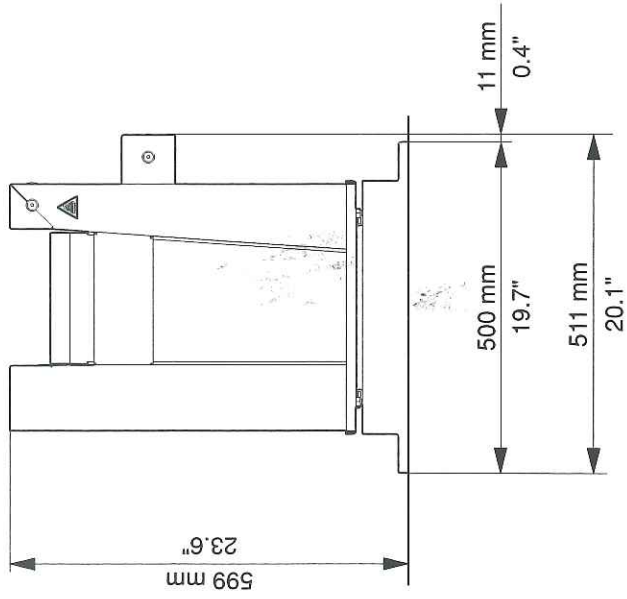


Fig. 8-1