

Date: 2026-04-16  
 Inquiry from:  
 Project:  
 Quotation-no.:  
 Item:  
 Reference:


**Drycooler GFH 092C/2-N(D)-F6/4P**

<b>Capacity:</b>	172.5 kW	<b>Medium:</b>	Ethyl. glycol 34 % <sup>(1)</sup>
Surface reserve:	0.0 %	Inlet:	50.0 °C
Air flow:	55700 m <sup>3</sup> /h	Outlet:	40.0 °C
Air inlet:	32.0 °C	Pressure drop:	0.37 bar
Altitude:	0 m	Volume flow:	16.04 m <sup>3</sup> /h
Fans:	2 Piece(s) 3~400V 50Hz	Noise pressure level:	65 dB(A) <sup>(2)</sup>
Data per motor:		at a distance of:	5.0 m
Speed:	890 min <sup>-1</sup>	Noise power level:	92 dB(A)
Capacity:	3.60 kW		
Current:	7.2 A <sup>(3)</sup>		

Casing:	Galv. Steel, RAL 7032	Tubes:	Copper
Surface:	502.6 m <sup>2</sup>	Fins:	Aluminum
Tube volume:	62 l	Connections per unit:	
Fin pitch:	2.40 mm	Inlet:	64.0 * 2.00 mm
Weight:	481 kg	Outlet:	64.0 * 2.00 mm

**Dimensions:**

L = 4000 mm  
 B = 1185 mm  
 H = 1250 mm  
 R = 110 mm  
 L1 = 3880 mm  
 H1 = 400 mm  
 S = 50 mm

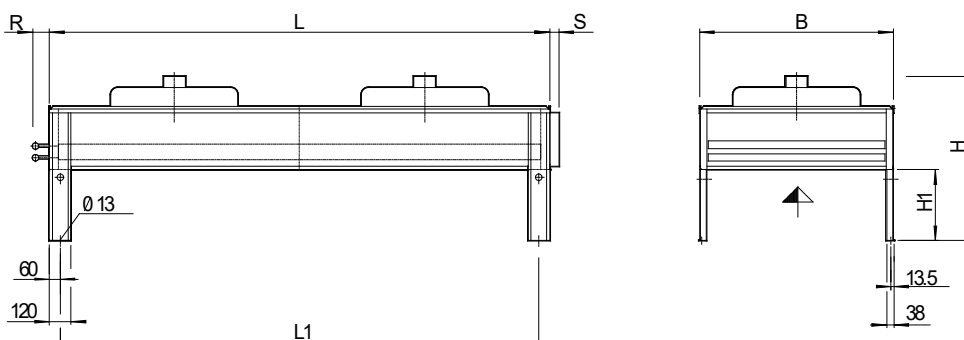

Attention: Drawing and dimensions not valid for all accessory options!

Unit price	6072.00 EUR
Accessories	650.00 EUR
Total price	6722.00 EUR
Total (List price without VAT, incl. transport protection)	6722.00 EUR
Terms of delivery:	Ex works
Payment cond.:	14 days 2% discount, 30 days net
Delivery time:	6 weeks
Validity:	12 weeks

Our general terms of sales and delivery apply!

(1) Fluid group 2 according to directive 67/548/EWG  
 (2) by using the enveloping surface method acc. to EN 13487  
 (3) The current consumption can differ in dependance of the air temperature and of the variations of system voltage according to the VDE guidance.