
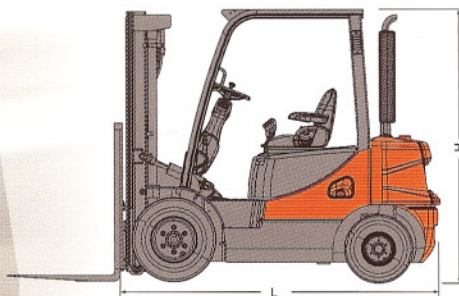


## Option Availability

● : Standard ○ : Optional

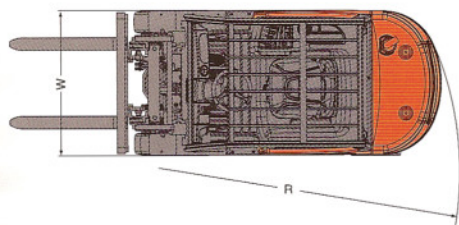

Options	D15/18S-5 & D20SC-5	G15/18S-5 & G20SC-5	D20/25/30/33S-5 & D35C-5	G20/25/30E-5	G20/25/30/33P-5 & G35C-5
Drive in Rack Overhead Guard	○	○	○	○	○
Oil- Cooled Disc Brakes	○	○	●	●	●
Fuel Cap with Key	○	○	○	○	○
Precleaner	○	○	○	○	○
Vertical Exhaust Tube	●	○	●	○	○
Catalytic Muffler *	○	○	○	○	○
Modular Operator Cabin	○	○	○	○	○
Radiator Screen	○	○	○	○	○
Non Marking Tire(Solid)	○	○	○	○	○
Spark Arrestor(w/o Cabin)	n/a	n/a	○	n/a	n/a
Mono Pad Foot Direction and Acceleration Control	○	○	○	○	○
AutoShift (Single,Dual Tire)	○	○	○	○	○
Engine Shutdown	○	○	○	○	○
Swingout LP MTG	n/a	○	n/a	○	○
Swingdown LP MTG	n/a	○	n/a	○	○
Lift and Tilt locking Hydraulic Control Valve	●	●	●	●	●
Auto Tilt Leveling	○	○	○	○	○
Rear Grab Bar with Horn	○	○	○	○	○
Quad Mast	n/a	n/a	○	○	○
Hydraulic Accumulator	○	○	○	○	○
Integral Sideshifter	○	○	○	○	○
Integral Shifting Fork Positioner	○	○	○	○	○
Hook on Sideshifter	○	○	○	○	○
UL LPS,DS Rating	n/a	n/a	○	○	○

\* Catalytic muffler is standard for Tier-3 E/G only

## Main Specification

Sales Model		D15S-5	D18S-5	D20SC-5	G15S-5	G18S-5	G20SC-5
Rated Load Capacity	kg	1500	1750	2000	1500	1750	2000
Load Center	mm	500	500	500	500	500	500
Overall Length to Fork Face	L mm	2170	2215	2250	2170	2215	2250
Truck Overall Width	W mm	1070	1070	1070	1070	1070	1070
Height of Overhead Guard	H mm	2170	2170	2170	2170	2170	2170
Minimum Turning Radius	R mm	1977	2022	2050	1977	2022	2050
Travel Speed, Loaded	km/h	19	19	19	18	18	18
Lifting Speed, Loaded	mm/s	600	600	600	600	600	600
Engine Models		A2300			G420F(Gas, LP, DF), G420FE(LP)		
Rated Power of Engine	kW (HP) / rpm	33(44)/2400			Gas: 35(47), LP: 34(46)/2300		
Max Torque	N-m / rpm	15/1600			15/1600		
Displacements	cc	2290			1975		

Sales Model		D20S-5		D25S-5		D30S-5		D33S-5		D35C-5		G20E-5	G25E-5
Rated Load Capacity	kg	2000		2500		3000		3250		3500		2000	2500
Load Center	mm	500		500		500		500		500		500	500
Overall Length to Fork Face	L mm	2530		2595		2700		2730		2765		2530	2595
Truck Overall Width	W mm	1170		1170		1197		1197		1255		1170	1170
Height of Overhead Guard	H mm	2183		2183		2183		2183		2183		2183	2183
Minimum Turning Radius	R mm	2220		2265		2365		2395		2420		2220	2265
Travel Speed, Loaded	km/h	21	19	21	19	20	18.5	20	18	20.5	18.5	19	19
Lifting Speed, Loaded	mm/s	530	530	520	520	500	500	490	490	420	420	530	510
Engine Models		4TNV98	4TNE98	4TNV98	4TNE98	4TNV98	4TNE98	4TNV98	4TNE98	4TNV98	4TNE98	G420F(Gas,LP, DF), G420FE(LP, DF)	
Rated Power of Engine	kW / rpm	46.3/2200	43.7/2300	46.3/2200	43.7/2300	46.3/2200	43.7/2300	46.3/2200	43.7/2300	46.3/2200	43.7/2300	39.5(53)/2550	
Max Torque	N-m / rpm	240/1320	181/1600	240/1320	181/1600	240/1320	181/1600	240/1320	181/1600	240/1320	181/1600	157/1600	
Displacements	cc	3319										1975	

Sales Model		G30E-5	G20P-5	G25P-5	G30P-5	G33P-5	G35C-5
Rated Load Capacity	kg	3000	2000	2500	3000	3250	3500
Load Center	mm	500	500	500	500	500	500
Overall Length to Fork Face	L mm	2700	2530	2595	2700	2730	2765
Truck Overall Width	W mm	1197	1170	1170	1197	1197	1255
Height of Overhead Guard	H mm	2183	2183	2183	2183	2183	2183
Minimum Turning Radius	R mm	2365	2220	2265	2365	2395	2420
Travel Speed, Loaded	km/h	18	19	19	18	18	18.5
Lifting Speed, Loaded	mm/s	500	530	510	500	500	420
Engine Models		G420F(Gas,LP, DF),G420FE(LP, DF)			G424F(LP), G424FE(LP)		
Rated Power of Engine	kW (HP) / rpm	39.5(53)/2550			46.2(62)/2550		
Max Torque	N-m / rpm	157/1600			181/2200		
Displacements	cc	1975			2405		

**DRIVE DOOSAN !**