

OVERALL DIMENSIONS


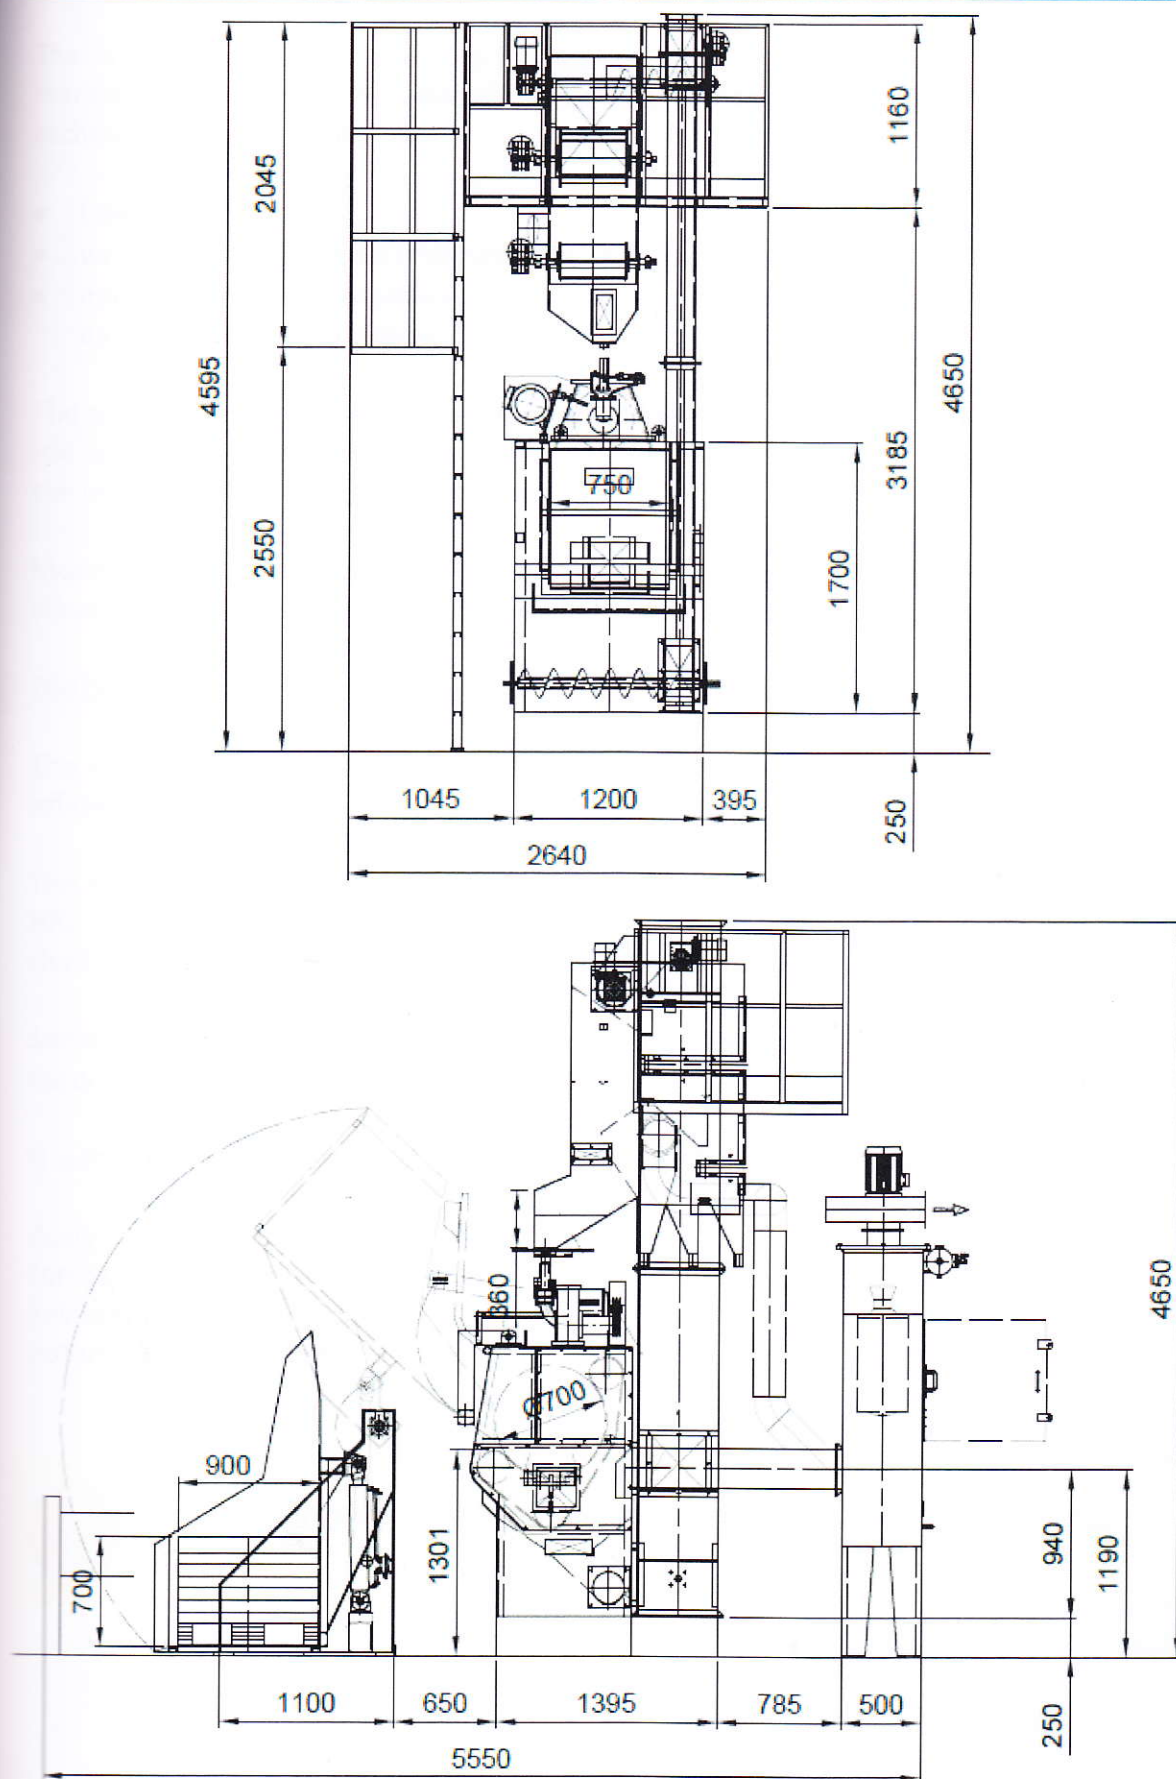


Fig. 4.2.1

Microphone positions

Pos.	1	2	3	4	5	6	7	8	9	10
dB(A)	82,4	84,8	86,4	88,7	86,5	84,9	84,3	82,7	81,8	81,5

Test positions (Fig. 4.7.1)

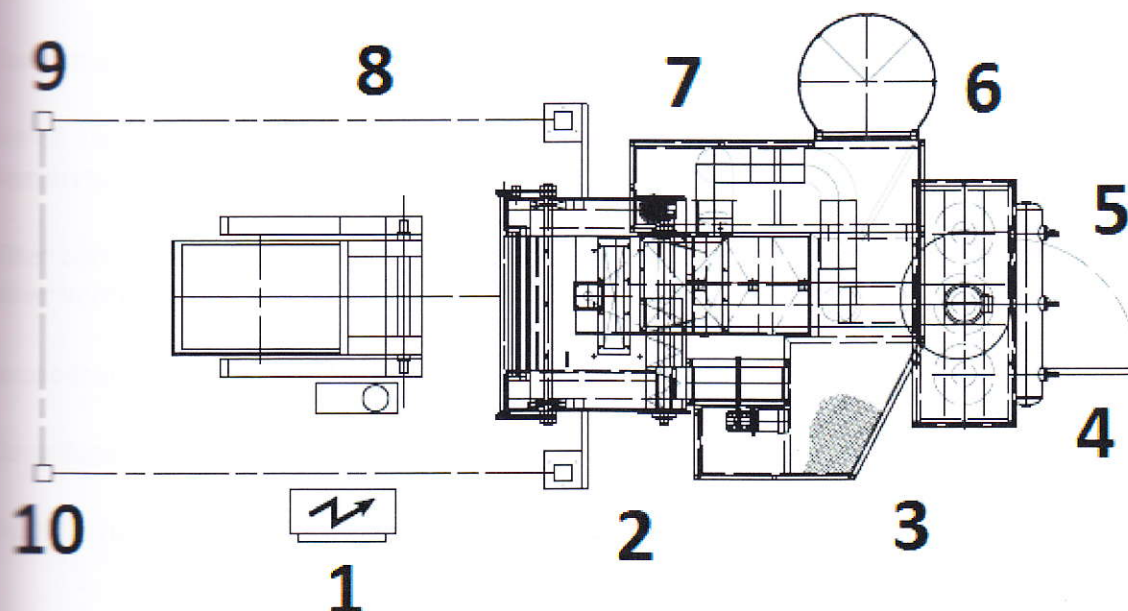

TECHNICAL DATA

- Belt conveyor material : rubber
- Loading capacity:
 - volume: : 0,12 m³ (120 litres)
 - weight: : 200 kg
- Belt conv. diameter : 700 mm
- Inlet usable width : 750 mm
- Belt conveyor perforation : holes Ø 5 mm
- No. of blast wheels mod. CG 380-N : 1
- Blast wheel motor power : 5,5 kW each
- Blast wheel speed : 3000 RPM
- Blast media throw speed : 78 m/sec.
- Total blast media propelling capacity : 80 kg/min.
- Air volume required for dedusting installation : 2500 m³/h