Stonewool packaging line – Annex 3

Supplier: Qubiqa
Manufacturing year: 2024
Technical parameters:

- For stonewool products:
  - Density: 30 – 300 kg/m^3
  - Thickness: 20 – 250 mm
  - Product dimensions: 1000 x 600, 1200 x 600, 1200 x 1200, 2400 x 1200, 2400 x 600, 2000 x 1200 mm
- Pallet dimensions: 2000 x 1200, 2000 x 1200, 1000 x 1000, 1200 x 1000, 1200, 1200 mm
- Kicker dimensions: 400 x 1200 x 150 mm

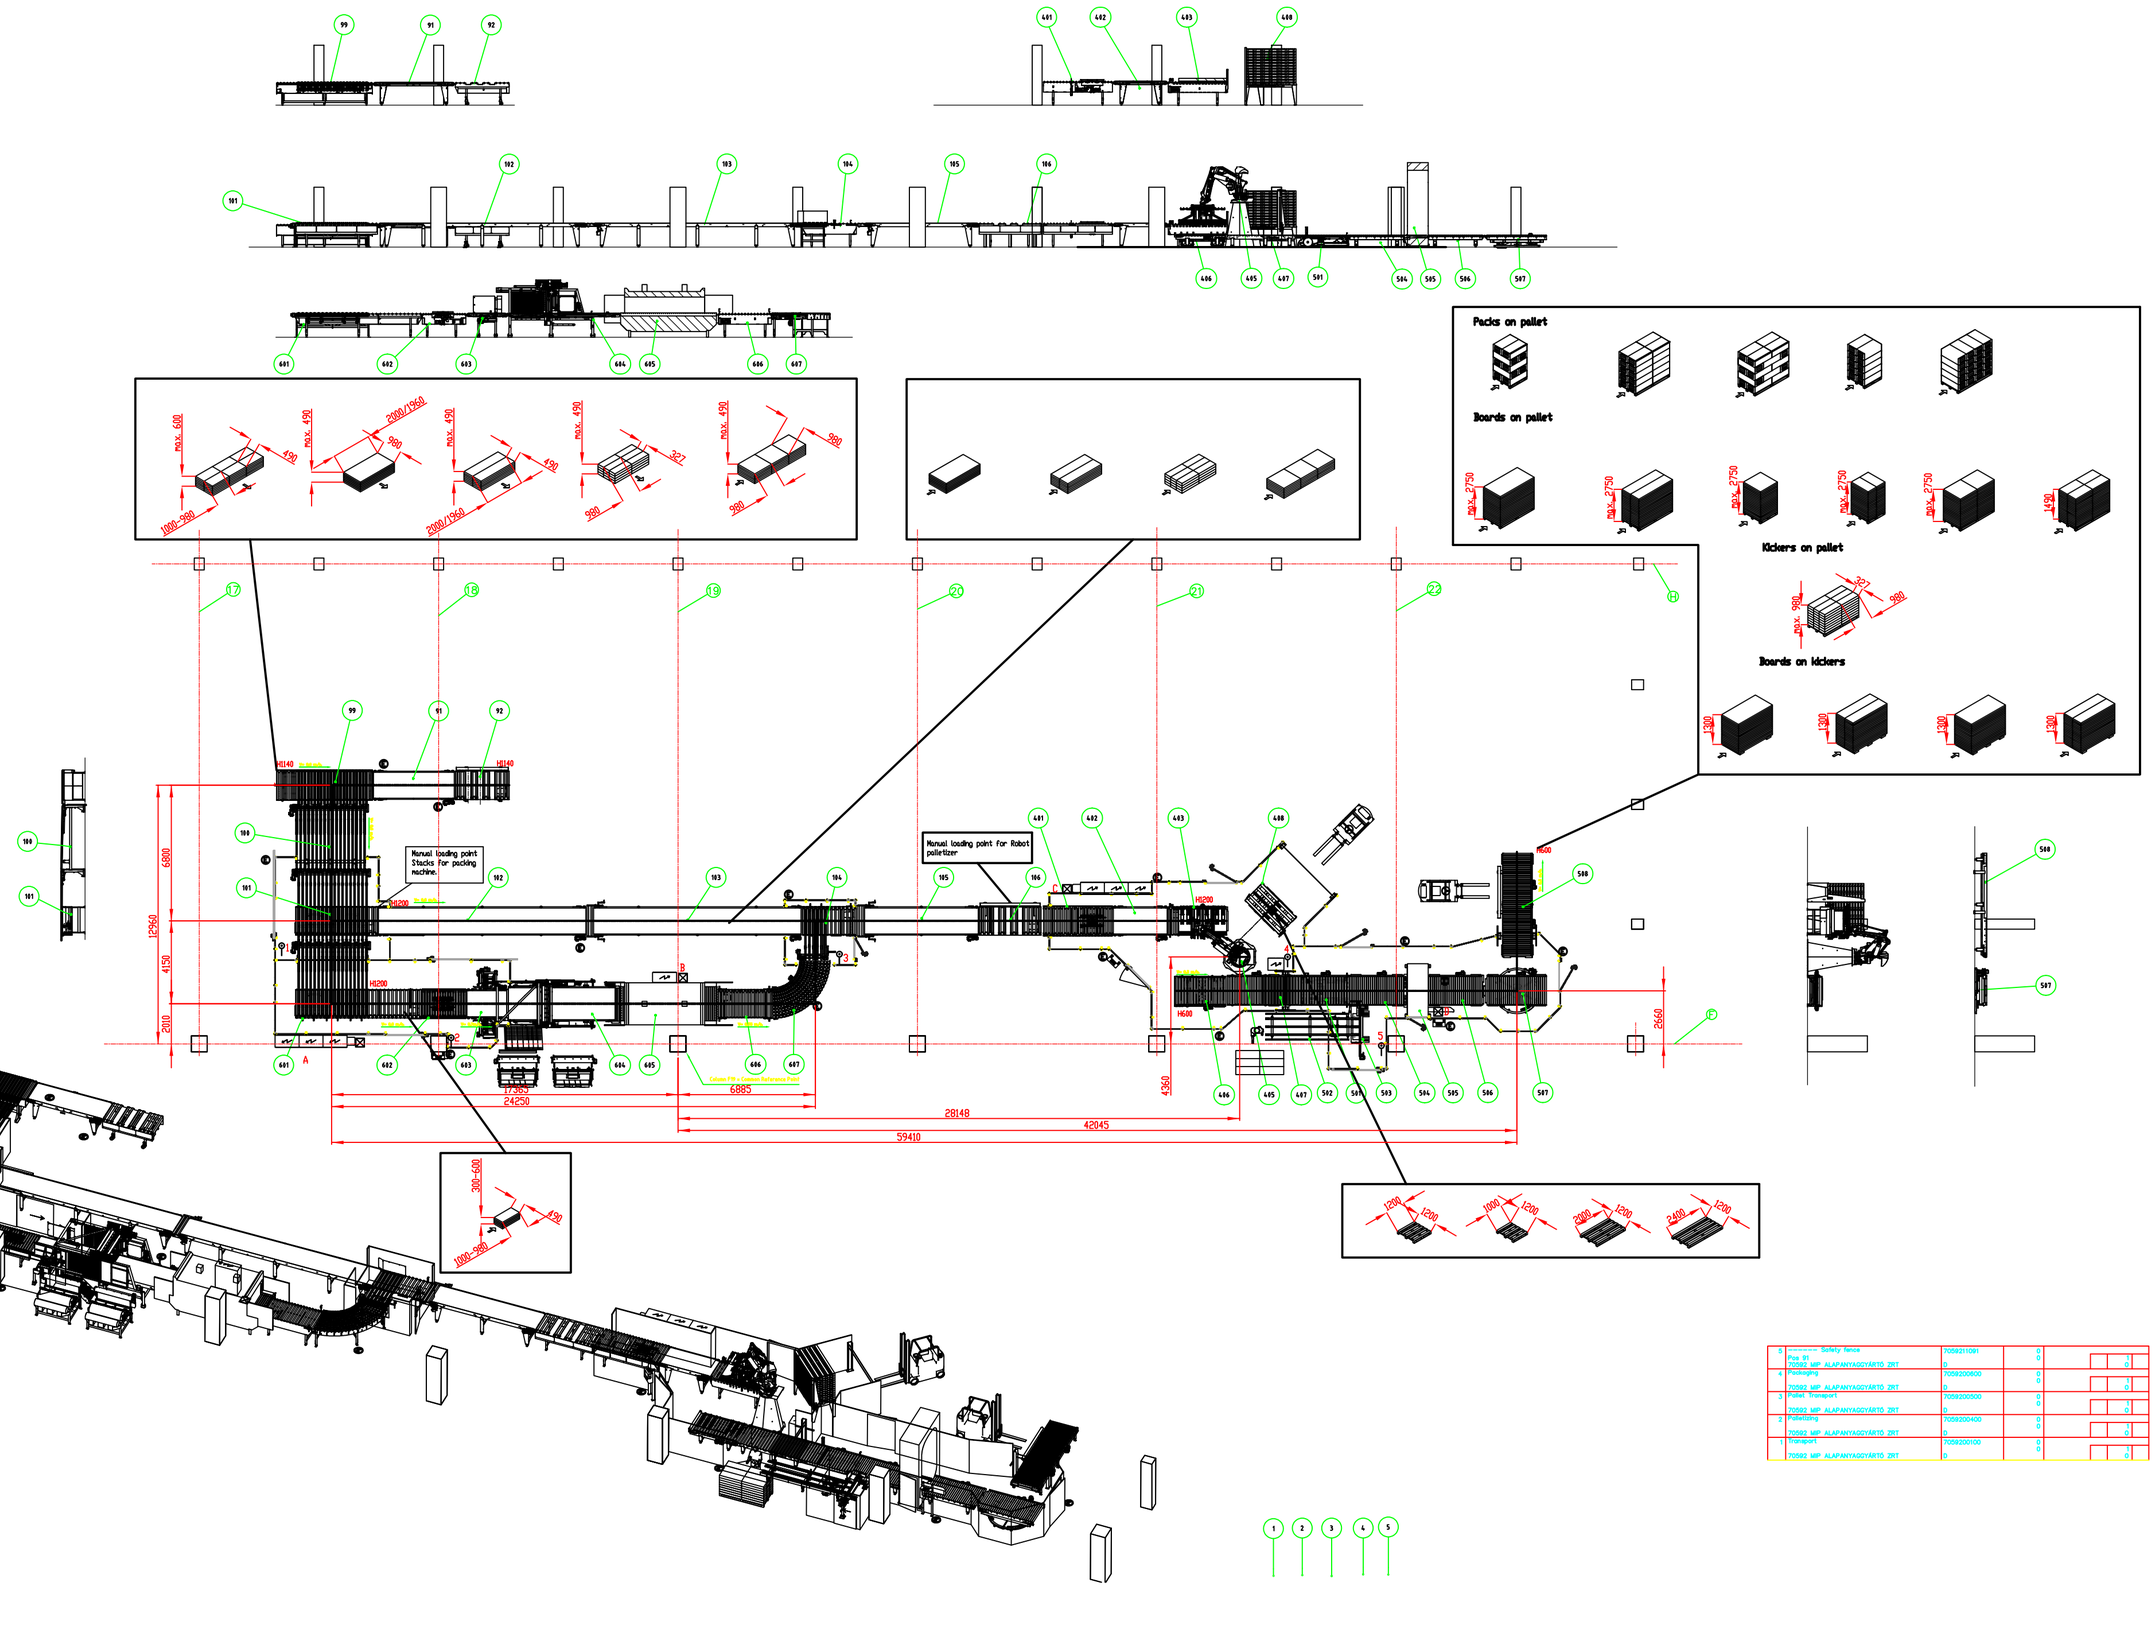
Main Equipment available:

- Transport system: POS. 91, 92, 99 – 109 (SEE POS. ON ATTACHED DRAWING „PACKAGING LINE")
- Robot palettizing (ABB 4 axis, 3 cycles/min, max load: 120 kg, max product height: 2600 mm): POS. 401 – 406
- Kick feeder (4 x 1 kickers/min), horizontal stretch wrapper (65 stacks/h 2 bands x 2 layers / 55 stacks/h 2 bands x 3 layers @ product W1200 x L2000 x H2600), turn table: POS. 501 – 508
- Packing system (S pack) with shrink tunnel (max 12 packs/min, height 600 mm): POS.601 – 607
- Electrical cabinets

Line arrangement / line dimension / packing pattern:

Status:
- Ready to deliver
- Stored in Denmark

TLP:CLEAR


Packs on pallet
Boards on pallet
Kickers on pallet
Boards on kickers
Manual loading point Stacks for packing machine.
Manual loading point for Robot palletizer
24250
6885
28148
42045
59410
17355
12560
6800
4150
2810
2660
4360
Safety fence
Pos 01
70592 MIP ALAPANYAGGYÁRTÓ ZRT
Packaging
Pallet Transport
Palletizing
Transport