


PERFORATED SCREEN SHEET - VS2300

ASCO® PERFORATED SCREEN SHEET FOR VS2300 - perforated sheet ideally designed for screening of soil, wood chips, gravel, building rubble, etc.

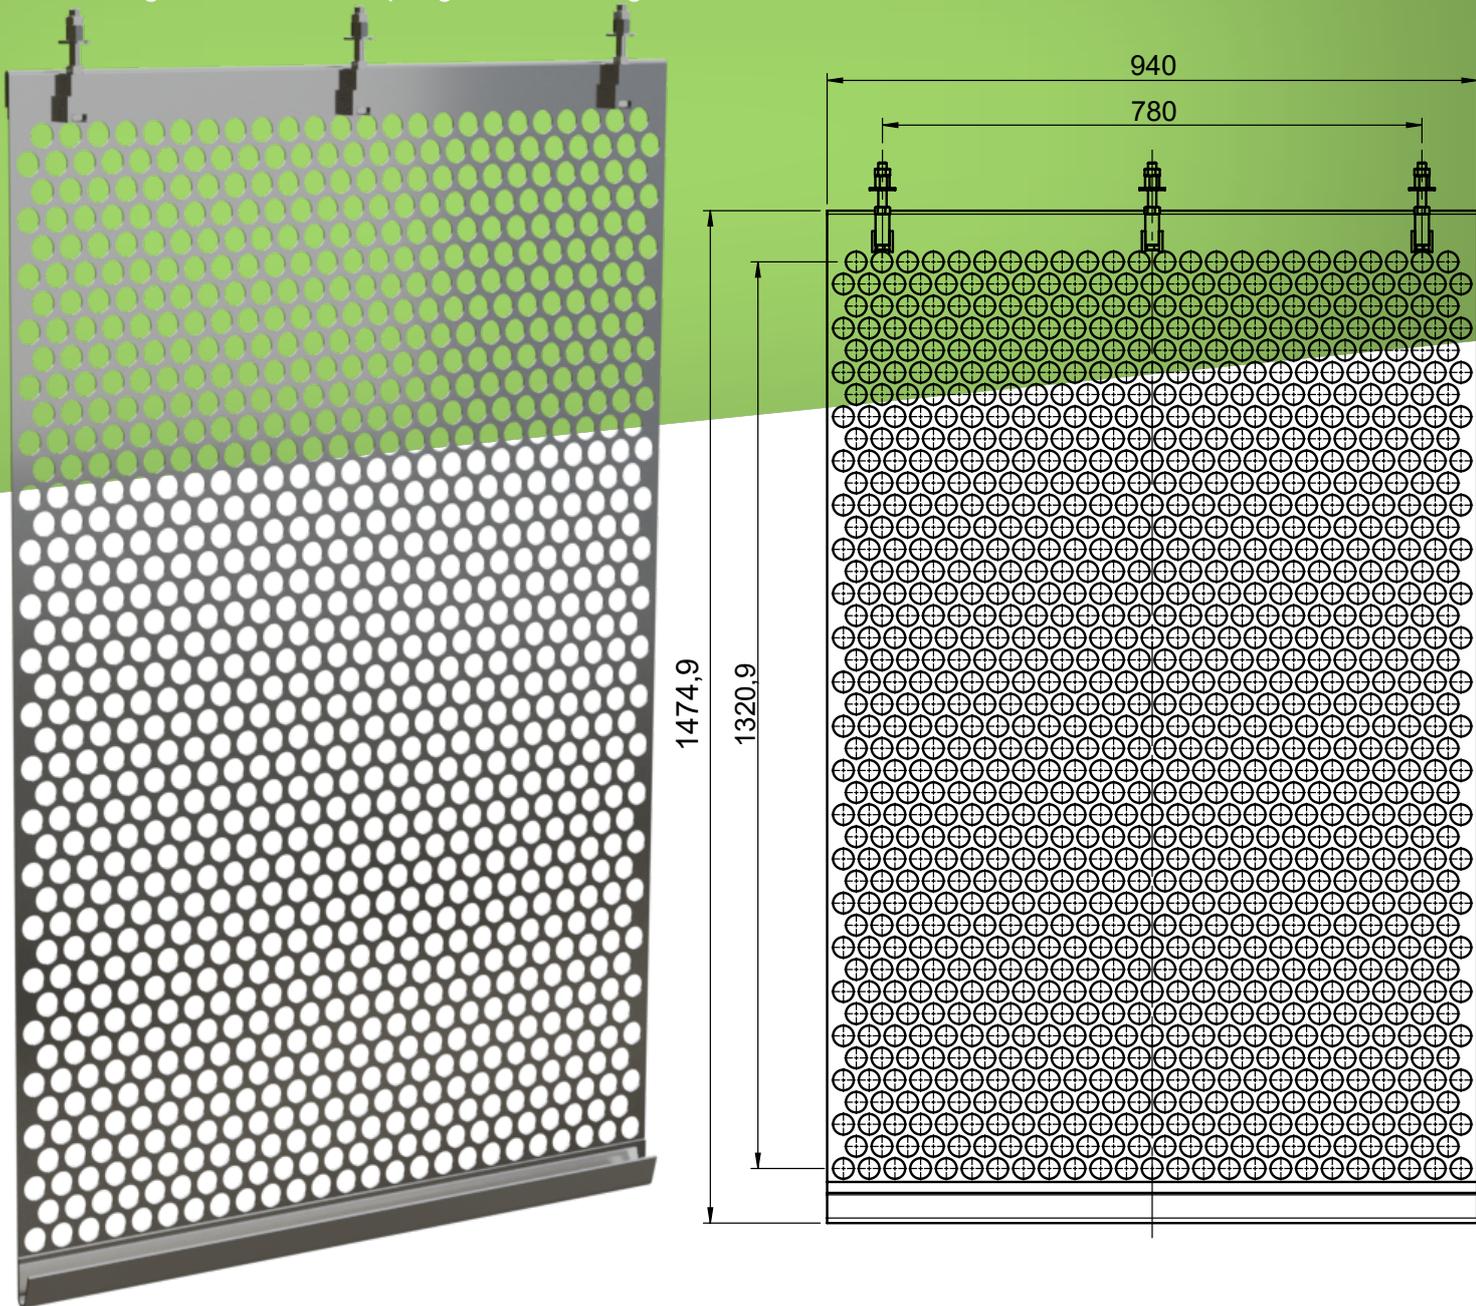

△ TECHNICAL DATA

- △ Perforated screen sheet is replaceable
- △ Screen sheet opening size: Ø20 mm (standard)
- △ Screen sheet opening shape: rounded (standard)
- △ Material: Cold rolled steel
- △ Weight: 15,5 kg
- △ Thickness: 2 mm
- △ Width and length depend on machine model
(different dimensions for VS1600, VS2300 and VS3000)

△ IMPORTANT

- △ Standard perforated screen sheet opening size is Ø20 mm, but that parameter can be modified to Ø30 or Ø40 by client's request and standard perforated screen sheet opening shape is rounded, but it can also be squared or in some other shape by client's request.

