

QUOTATION

MULTIVAC & HENKELMANN - PACKAGING LINE FOR SHRINK BAGS




The line consists of :

Vacuum packaging machine MULTIVAC C 700



Chamber dimensions(LxBxH): 1070x440x250 mm

Machine dimensions(LxBxH): 1270x850x1150 mm

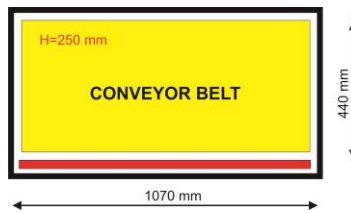

Seal bar length: 1 x 1070 mm

Machine cycle: 15-40 sec.

Voltage: 400 V-3-50 Hz

Power: 5,8 kW ; 22 A

HENKELMAN DIPTANK 200 A



Automatic platform with conveyor belt

Digital temperature control



Stainless steel casing

Maximum loading capacity: 30 kg

Immersion depth: 200 mm

Immersion time: 3-5 seconds (adjustable)

Cycle time: 22 seconds

Compressed air consumption 50 l/min 6 bar

Automatically controlled water supply

Water drain

Automatic water level control

Built-in scale protection

Time switch to preheat water

Specs	Diptank 200A
Chamber LxWxH (mm)	575x1098x200
Machine LxWxH (mm)	1170x1700x1350
Voltage	400V-3-50 Hz 380V-3-60 Hz
Machine cycle 50 Hz/60 Hz (sec.)	22
Power (kW)	20,0
Weight (kg)	310

Dimensions mm

