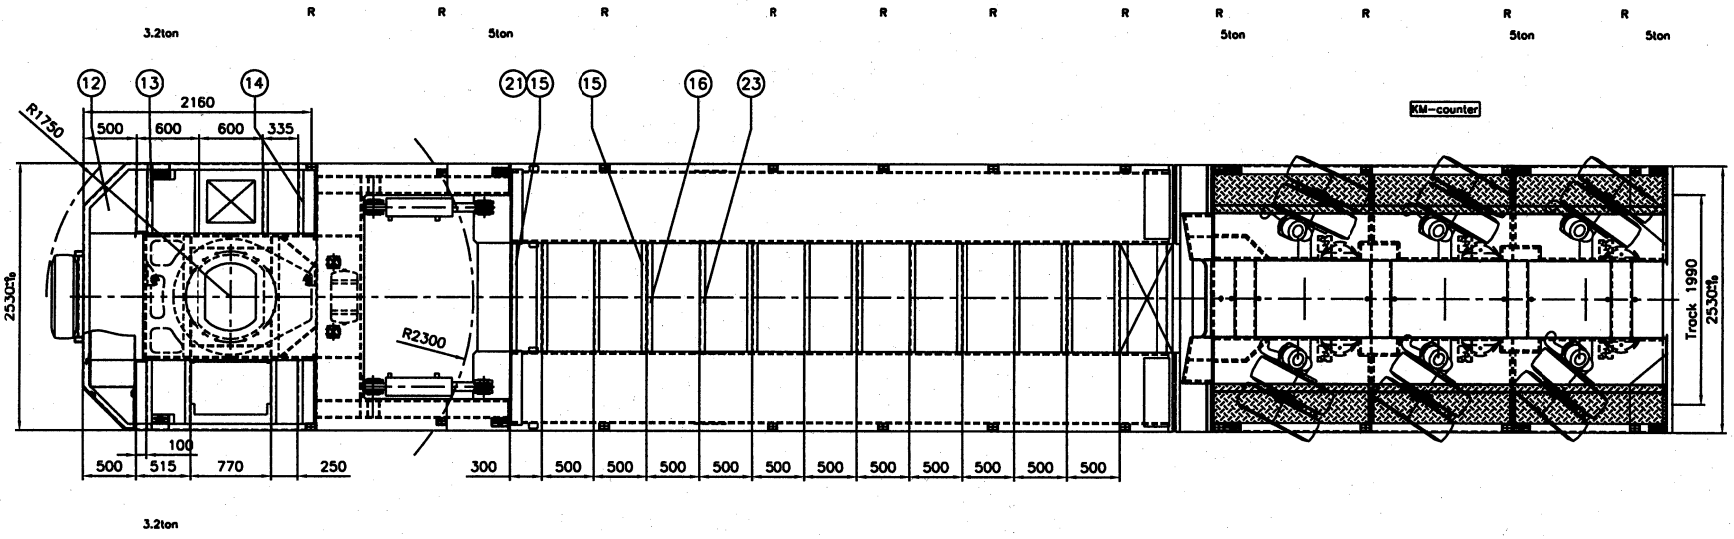

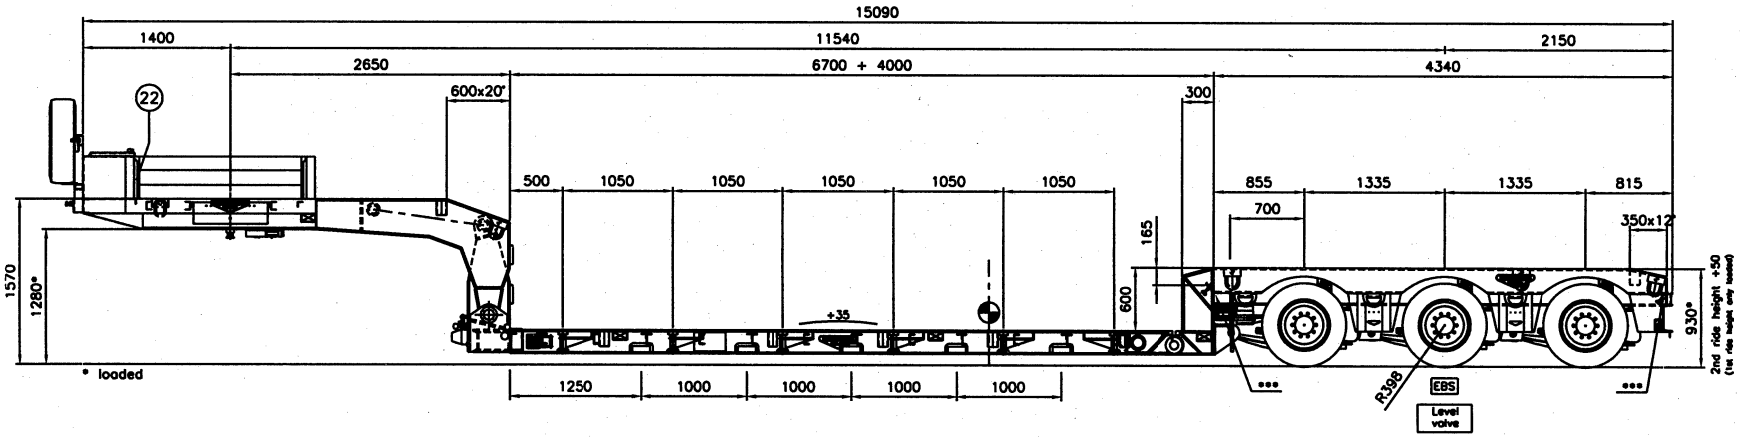



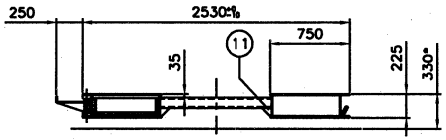

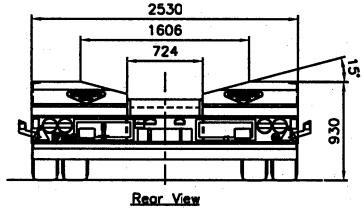

In the length	Hitch	H-14721	Suspension	BPW SLU 12010 E36	Drawing begin	H-14717	
Extendable	Front adapter	H-14722	Axles	BPW HNZFL 12010 ECO BRAKE	Side rave	(F) HDW 140 closed, (R) UNP 240 closed	
500	Chassis	H-14723	Rates/lower	* by H=190 +235/-30 (incl. bump 45)	Stake pockets	88x88x6 2x 2pcs.	
1000	Inner boom	K-15644	Tyres	Continental 235/70 R17.5	Deck	28mm Hardwood S/10mm Checker plate	
1500	Center boom	----	Fifth wheel load	18.000 kg (techn. 18.000 kg)	Weldings	K-13320	
2000	Outer boom	K-15545	Bogie load	30.000 kg (techn. 30.000 kg)	Drain holes	ø13	
2500	Rear adapter	H-14724	Landing gear	----	Type vehicle	3480-48	
3000	Beam above axles	H-14725	Client	- OBERMAIR - (A)	Chassis number	XLB33H58L7L007100	
3500	Steering	H-12510					
4000	Rear	H-14722					
	Toolbox	H-12024					
	Spare wheel carrier	P-8185					
	Outriggers	P-7527					
	Construction notes	K-14217					

COPYRIGHT BROSHUIS B.V.

BROSHUIS

BROSHUIS B.V. SPECIAL TRAILERS
INDUSTRIEWEG 22 5253 AD NIEUWKUIJK
POSTBUS 488 5250 AL VUGHT
TELEFOON +31(0)73 5372800
TELEFAX +31(0)73 5372888
E-MAIL sales@broshuis.com

Specification modification			
Drawn	MJ/PR	Dimensions in mm	
Date	20-09-2006	Scale	1:25
Order no.	07100	Format	A1
Proceeded 05176		Tolerances	ISO 7788-c1

Projection

TRI AXLE SINGLE EXTENDIBLE LOW LOADER

Drawing no. 07100 Checked