

PlateRite Ultima Series


Multi-Format Thermal Plate Recorders



Creating a Future in Print

High-end CtP that maximizes the performance of large-format offset presses

PlateRite Ultima Series

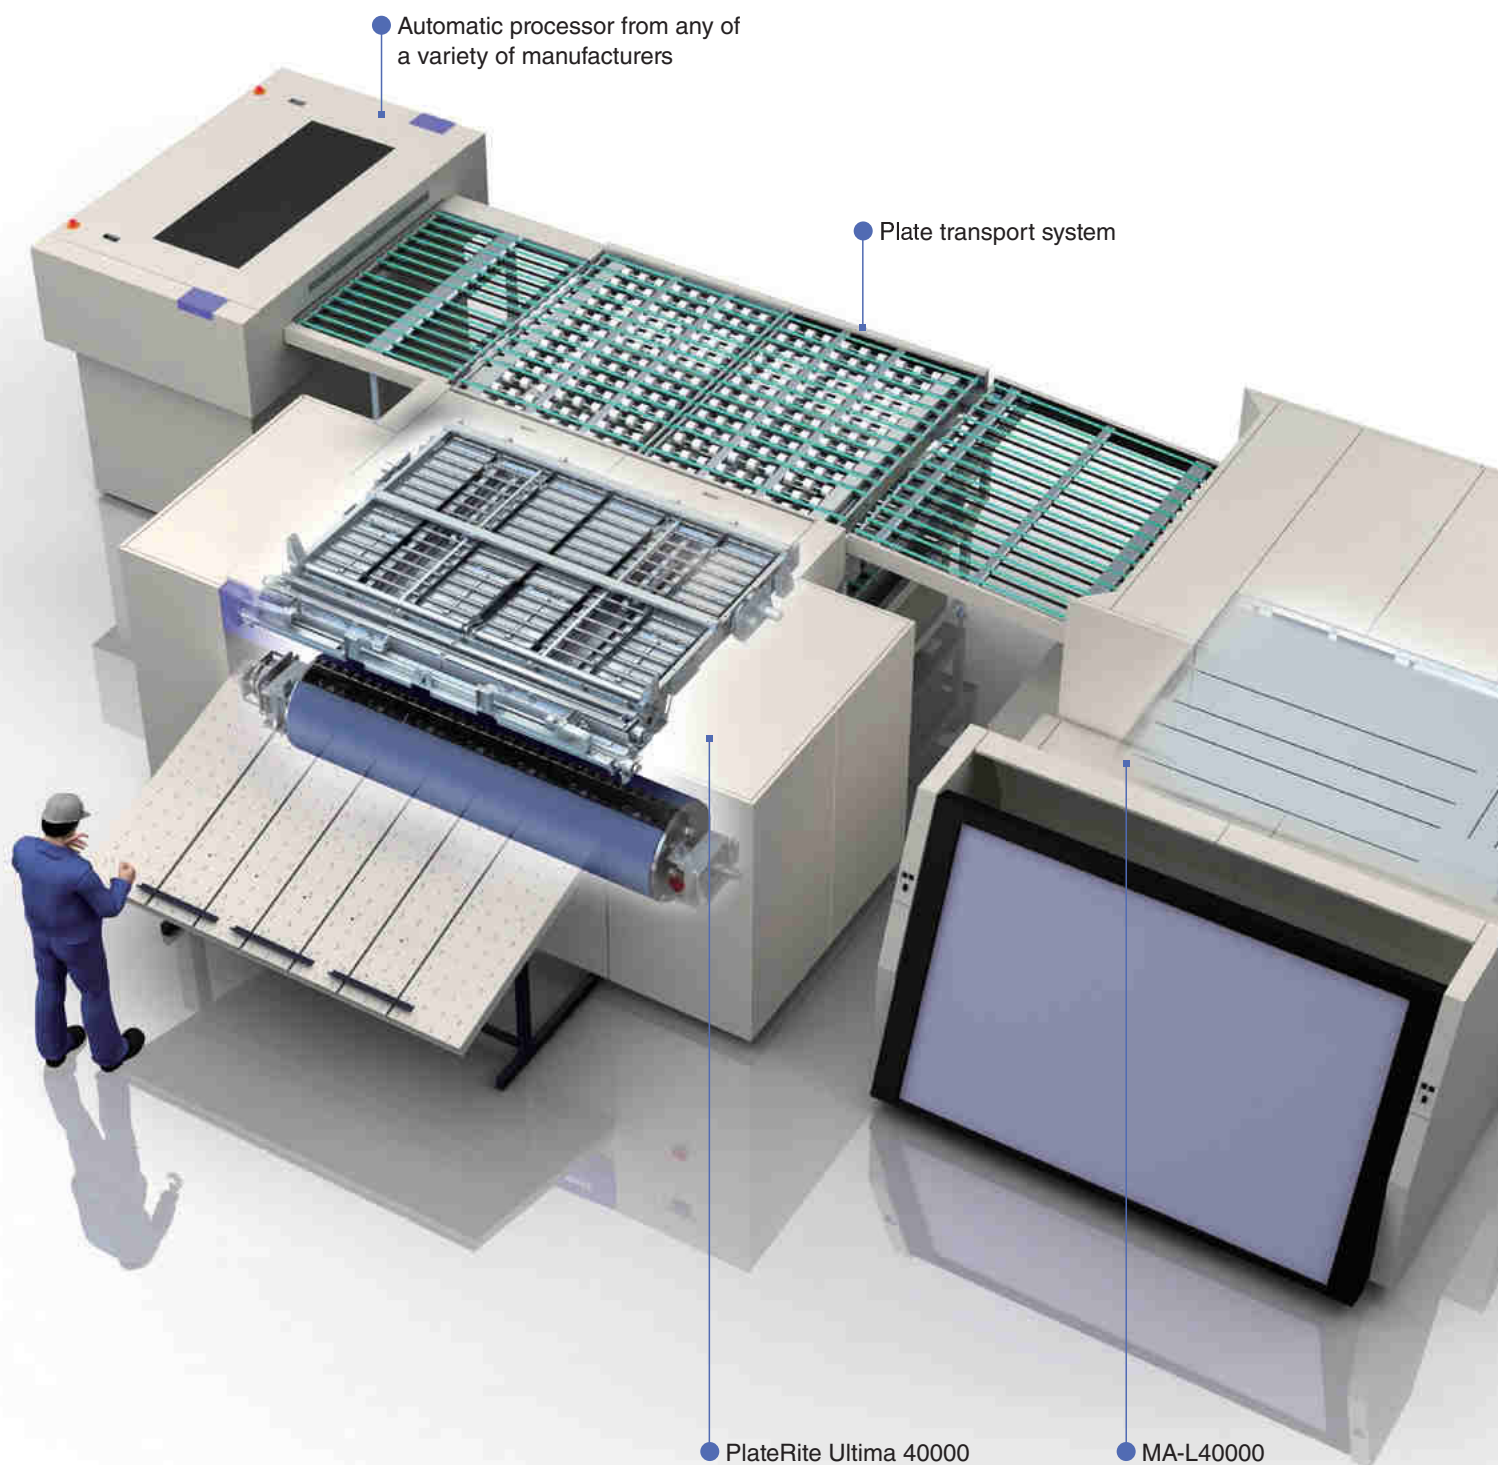

This illustration shows the PlateRite Ultima 40000 connected to the MA-L40000.



PlateRite Ultima 48000

An advanced thermal CtP unit that can output plates up to 48 A4 pages in size, and maximizes the productivity of large-format web offset presses.

Supported plate sizes:

Maximum: 2,900 x 1,350 mm; Minimum: 650 x 550 mm

PlateRite Ultima 40000

A space-saving thermal CtP unit that can output plates up to 40 A4 pages in size.

Supported plate sizes:

Maximum: 2,280 x 1,600 mm; Minimum: 650 x 550 mm*

* 500 x 550 mm (factory option)

PlateRite Ultima 36000

A thermal CtP unit that can output plates up to 36 A4 pages in size and features twin imaging heads for even higher productivity (ZX and Z models).

Supported plate sizes:

Maximum: 2,100 x 1,600 mm; Minimum: 650 x 550 mm*

* 500 x 550 mm (factory option)

PlateRite Ultima 24000

The same features as the PlateRite Ultima 36000 in a thermal CtP unit that can output plates up to 24 A4 pages in size.

Supported plate sizes:

Maximum: 1,750 x 1,400 mm; Minimum: 650 x 550 mm*

* 500 x 550 mm (factory option)

PlateRite Ultima 16000II/N

A thermal CtP unit that can output plates for large-size media, including plates up to 16 A4 pages in size.

Supported plate sizes:

<16000IIZ/IIS/II> Maximum: 1,470 x 1,165 mm;
Minimum: 650 x 550 mm*

<16000N> Maximum: 1,470 x 1,180 mm;
Minimum: 650 x 550 mm*

* 450 x 370 mm (factory option)



SIZE
UPGRADE

PRODUCTIVITY
UPGRADE

Increased efficiency supplying the press

Automatic inline plate punching eliminates the need to adjust registration at the press

The PlateRite Ultima series automatic inline punching system punches holes in plates immediately before they are loaded onto the drum. The punch holes ensure consistent plate placement on the drum, when used in conjunction with registration pins. This helps eliminate imaging variations caused by improper plate placement, and results in superior registration accuracy.

When optional press punch blocks are used (up to 10

punch blocks can be installed and selected according to plate size and press type), the imaged plates can be loaded directly onto the press after output to ensure registration accuracy is maintained. The use of press punch blocks during plate output not only removes the need for manual punching later on in the workflow, but also practically eliminates the need to adjust register at the press. The result is shorter press make-ready time and improved press operating ratios, for even better overall productivity.

Higher productivity with dual plate loading models

Consecutive imaging of pairs of plates

Not only can the advanced PlateRite Ultima large-format platesetters load a single large-size plate onto the drum, they can also load pairs of smaller plates together. Imaging pairs of plates increases productivity, since plates need to be loaded and unloaded fewer times. The PlateRite 36000 and PlateRite

24000's ZX and Z series models also feature twin imaging heads that enable simultaneous imaging of two plates, for even higher productivity.

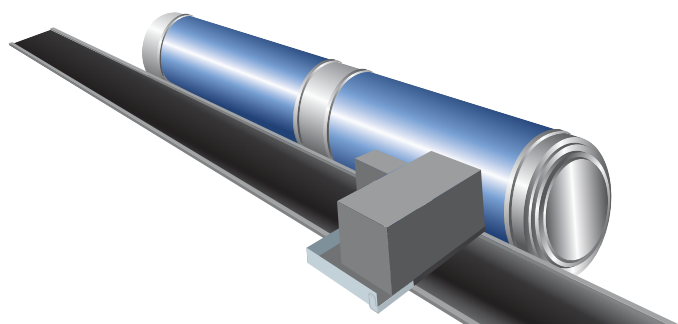


	Plate size during dual plate loading
PlateRite Ultima 48000	16 A4-size pages
PlateRite Ultima 40000	8 A4-size pages
PlateRite Ultima 36000	
PlateRite Ultima 24000	

• The PlateRite Ultima 16000 does not support dual plate loading.

The flexibility to upgrade in the future

Upgrade to larger size plate output when you get a larger press



The PlateRite Ultima 24000 and PlateRite Ultima 36000 can be upgraded to handle the same size of plates as the PlateRite Ultima 40000. In other words, the PlateRite Ultima 24000 and PlateRite Ultima 36000 not only provide high-end CtP, they also offer the flexibility to support larger plates if you get a large-format press in the future.

• Not all models can be upgraded.

Upgrade to higher productivity and support greater work volume

With the replacement of a few key parts, the PlateRite Ultima 16000 can be upgraded to the IIE, IIS, and IIZ models for higher productivity even after installation. Equipment like the PlateRite Ultima 16000 helps you schedule and minimize your equipment investment costs.

• The PlateRite 16000IIZ/S/E cannot be upgraded to the PlateRite 16000N.

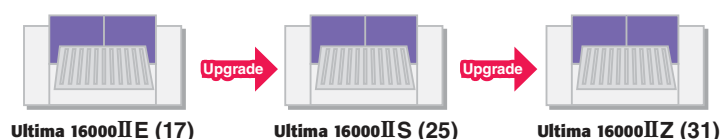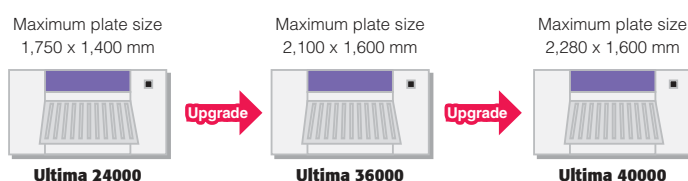


Realizing a remarkable level of productivity

A multi-channel imaging head made possible by unique GLV™ technology

GLV™ (Grating Light Valve™) technology employs production techniques used in semiconductor manufacturing. A GLV™ array consists of thousands of microscopic reflective ribbons placed over a silicon chip. These ribbons can be moved up or down to reflect or diffract an imaging laser targeted at the array, simultaneously turning on and off a high number of optical channels.

The PlateRite Ultima series units feature an advanced imaging head in which SCREEN's tried-and-true laser control technology is used to precisely target a high-power laser at the GLV™ array, making it possible to simultaneously control 1,024 channels of light. This dramatically increases the width of the area that can be imaged with each rotation of the drum and contributes to significantly higher productivity.

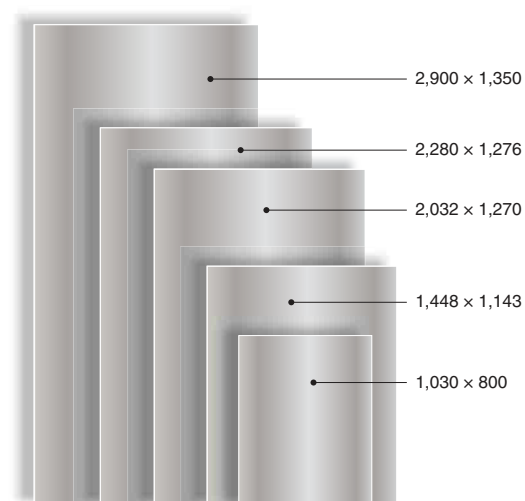

PlateRite Ultima series productivity

		2,900 x 1,350 mm	2,280 x 1,276 mm	2,032 x 1,270 mm	1,448 x 1,143 mm	1,030 x 800 mm
PlateRite Ultima 48000SX	 	17	20	22	34	42
PlateRite Ultima 48000S	 	14	17	18	28	34
PlateRite Ultima 40000SX	 	—	22	24	30	44
PlateRite Ultima 40000S	 	—	17	19	24	36
PlateRite Ultima 36000ZX	 	—	—	35 (24)	41 (30)	70
PlateRite Ultima 36000Z	 	—	—	29 (19)	34 (24)	58
PlateRite Ultima 36000SX	 	—	—	24	30	44
PlateRite Ultima 36000S	 	—	—	19	24	36
PlateRite Ultima 24000ZX	 	—	—	—	41 (30)	70
PlateRite Ultima 24000Z	 	—	—	—	34 (24)	58
PlateRite Ultima 24000SX	 	—	—	—	30	44
PlateRite Ultima 24000S	 	—	—	—	24	36
PlateRite Ultima 16000N	 	—	—	—	42	45
PlateRite Ultima 16000IIZ	 	—	—	—	31	39
PlateRite Ultima 16000IIS	 	—	—	—	25	32
PlateRite Ultima 16000IIE	 	—	—	—	17	20

- Productivity may vary depending on the sensitivity of the plates used.
- Productivity was measured during output at 2,400 dpi, with the unit connected to an MA-L multi-cassette plate autoloader.
- Numbers in parentheses indicate productivity when only one imaging head is used.
- Productivity may vary slightly by model when a Skid autoloader is used.

Smooth and easy handling of even large-size plates

Automated plate loading/unloading system

Mounting heavy large-size plates not only taxes the operator but also has the potential to reduce the overall efficiency of the CtP production line, since the use of large plates increases the risk of damage to the plates when they are loaded into the cassettes, and more time is required for loading operations.

The PlateRite Ultima series units can be incorporated into an automated production line with the addition of any of a variety of plate handling equipment options, including the Skid and MA-L plate autoloaders, which feature Screen's renowned plate transport technology.

Product name	PlateRite Ultima 24000			
	24000ZX	24000Z	24000SX	24000S
Recording system	External drum			
Light source	1,024 channel laser diode x 2	512 channel laser diode x 2	1,024 channel laser diode x 1	512 channel laser diode x 1
Plate size	Maximum 1,750 x 1,400 mm [68.8" x 55.1"]; Minimum 650 x 550 mm [25.6" x 21.7"]* ¹			
Dual plate support	Support for two plates, maximum 1,060 x 1,600 mm [41.7" x 62.9"] each			
Imaging size	Maximum 1,750 x 1,385 mm [68.8" x 54.5"]* ² (Leading edge gripper margin: 8 mm [0.32"]; Trailing edge gripper margin: 7 mm [0.28"])			
Plate thickness	0.2 to 0.4 mm [7.9 to 15.7 mil]* ³			
Plate type	Thermal aluminum plate			
Resolutions	1,200* ⁴ , 2,400, 2,438, 2,540 dpi			
Productivity	See productivity chart in this brochure			
Press punch systems	Registration punch			
Interface	S-PIF			
Dimensions* ⁵ (W x D x H)	Main unit: 3,840 x 2,100 x 1,795 mm [151.2" x 82.7" x 70.7"]			
Weight	Main unit: 3,710 kg [8,162 lb] (maximum)			
Power requirements	Main unit : Single phase 200 to 240 V, 5.2 kW, 35 A Chiller unit: Single phase 200 to 240 V, 1.4 kW, 8 A (Z and ZX models require two chiller units) Blower unit: Single phase 200 to 240 V, 1 kW, 10 A			
Environment	Recommended: Temperature 21 to 25°C (69.8 to 77°F); Relative humidity: 50 to 70% Required : Temperature 18 to 26°C (64.4 to 78.7°F); Relative humidity: 40 to 70%			
Standard accessories	Manual plate loading table, chiller unit, blower unit, signal tower			
Optional accessories	Punch systems (various printing press punches), punchless plate handling option, dual plate loading support (S model only), 0.5 mm plate thickness support			
	MA-L40000, SA-L40000 Skid, AT-M			

PlateRite Ultima 16000			
16000N	16000IIZ	16000IIS	16000IIE
External drum			
1024 channel laser diode x 1	512 channel laser diode x 1		
Maximum 1,470 x 1,180 mm [57.8" x 46.4"]; Minimum 650 x 550 mm [25.6" x 21.7"]* ⁷	Maximum 1,470 x 1,165 mm [57.8" x 45.8"]; Minimum 650 x 550 mm [25.6" x 21.7"]* ⁷		
Not supported			
Maximum 1,470 x 1,169 mm [57.8" x 46.0"]* ⁸ (Leading edge gripper margin: 6 mm [0.24"]; Trailing edge gripper margin: 5 mm [0.20"])	Maximum 1,470 x 1,154 mm [57.8" x 45.4"]* ⁸ (Leading edge gripper margin: 6 mm [0.24"]; Trailing edge gripper margin: 5 mm [0.20"])	Maximum 1,470 x 1,157 mm [57.8" x 45.5"] (Leading edge gripper margin: 3 mm [0.12"]; Trailing edge gripper margin: 5 mm [0.20"])	
0.2 to 0.4 mm [7.9 to 15.7 mil]* ⁷			
Thermal aluminum plate			
1,200* ⁴ , 2,400, 2,438, 2,540 dpi			
See productivity chart in this brochure			
Registration punch			Punchless plate handling
(S-PIF / Gigabit Ethernet)* ⁹	S-PIF / F-PIF		
Main unit: 2,740 x 1,775 x 1,515 mm[107.9" x 69.9" x 59.7"]			
Main unit: 1,640 kg [3,608 lb] (maximum)			
Main unit : Single phase 200 to 240 V, 5 kW, 25 A Chiller unit : Single phase 200 to 240 V, 0.7 kW, 4 A Blower unit : Single phase 200 to 240 V, 1 kW, 10 A	Main unit : Single phase 200 to 240 V, 5 kW, 25 A Chiller unit : Single phase 200 to 240 V, 1.4 kW, 8 A Blower unit : Single phase 200 to 240 V, 1 kW, 10 A		
Recommended: Temperature 21 to 25°C (69.8 to 77°F); Relative humidity: 50 to 70% Required : Temperature 18 to 26°C (64.4 to 78.7°F); Relative humidity: 40 to 70%			
Chiller unit, blower unit			
Punch systems (various printing press punches), punchless plate handling option, signal tower unit			Punch systems (various printing press punches), standard punch, signal tower unit
Manual plate loading table, MA-L16000N, AT-M* ¹⁰			


*7. A minimum plate size of 450 x 370 mm and thickness of 0.15 mm are offered as an option.

*8. When the punchless plate handling option is used, the leading edge gripper margin is 3 mm and the trailing edge gripper margin is 5 mm.

*9. It is necessary to select either of the interface types.

*10. Depending on the specifications, a specialized connection kit may be required.

Mix and match up to two autoloaders

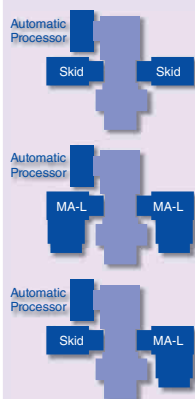

• Connect two Skid autoloaders

Load up to 1,200 plates of the same type. If you need to output high volumes of the same type of media, this setup enables continuous operation for a surprisingly long time.

• Connect two MA-L autoloaders


Automatically supply up to eight different types of media. This setup is strongly recommended for companies that handle many different types of plates.

• Connect one Skid autoloader and one MA-L autoloader

Load the Skid autoloader with the media you use most often, and load the MA-L with lower volume media for a more flexible plate supply environment.


• *Not compatible with the PlateRite Ultima 16000 series.*

• PlateRite Ultima 40000/36000/24000

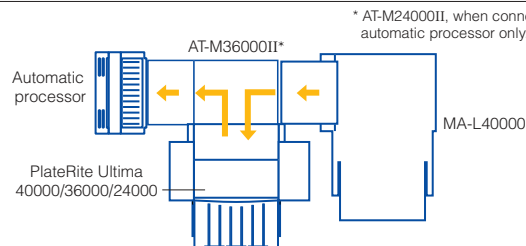

* AT-M24000II, when connected to automatic processor only.

• PlateRite Ultima 16000

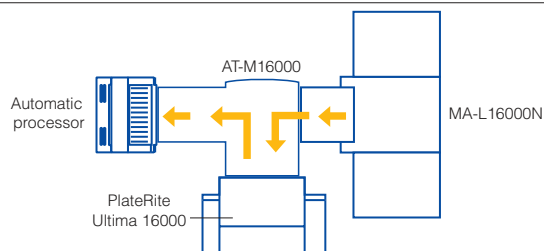

PlateRite Ultima series specifications

Product name	PlateRite Ultima 48000		PlateRite Ultima 40000		PlateRite Ultima 36000			
	48000SX	48000S	40000SX	40000S	36000ZX	36000Z	36000SX	36000S
Recording system	External drum		External drum		External drum			
Light source	1,024 channel laser diode x 1	512 channel laser diode x 1	1,024 channel laser diode x 1	512 channel laser diode x 1	1,024 channel laser diode x 2	512 channel laser diode x 2	1,024 channel laser diode x 1	512 channel laser diode x 1
Plate size	Maximum 2,900 x 1,350 mm [114.1" x 53.1"]; Minimum 650 x 550 mm [25.6" x 21.7"]		Maximum 2,280 x 1,600 mm [89.7" x 62.9"]; Minimum 650 x 550 mm [25.6" x 21.7"] ^{*1}		Maximum 2,100 x 1,600 mm [82.6" x 62.9"]; Minimum 650 x 550 mm [25.6" x 21.7"] ^{*1}			
Dual plate support	Support for two plates, maximum 1,450 x 1,350 mm [57.0" x 53.1"] each		Support for two plates, maximum 1,060 x 1,600 mm [41.7" x 62.9"] each		Support for two plates, maximum 1,060 x 1,600 mm [41.7" x 62.9"] each			
Imaging size	Maximum 2,900 x 1,335 mm [114.1" x 52.5"] ^{*2} (Leading edge gripper margin: 8 mm [0.32"]; Trailing edge gripper margin: 7 mm [0.28"])		Maximum 2,280 x 1,585 mm [89.7" x 62.4"] ^{*2} (Leading edge gripper margin: 8 mm [0.32"]; Trailing edge gripper margin: 7 mm [0.28"])		Maximum 2,100 x 1,585 mm [82.6" x 62.4"] ^{*2} (Leading edge gripper margin: 8 mm [0.32"]; Trailing edge gripper margin: 7 mm [0.28"])			
Plate thickness	0.3 to 0.4 mm [11.9 to 15.7 mil] ^{*3}		0.2 to 0.4 mm [7.9 to 15.7 mil] ^{*3}		0.2 to 0.4 mm [7.9 to 15.7 mil] ^{*3}			
Plate type	Thermal aluminum plate		Thermal aluminum plate		Thermal aluminum plate			
Resolutions	1,200 ^{*4} , 2,400, 2,438, 2,540 dpi		1,200 ^{*4} , 2,400, 2,438, 2,540 dpi		1,200 ^{*4} , 2,400, 2,438, 2,540 dpi			
Productivity	See productivity chart in this brochure		See productivity chart in this brochure		See productivity chart in this brochure			
Press punch systems	Registration punch		Registration punch		Registration punch			
Interface	S-PIF		S-PIF		S-PIF			
Dimensions ^{*5} (W x D x H)	Main unit: 4,600 x 2,100 x 1,795 mm [181.2" x 82.7" x 70.7"]		Main unit: 3,840 x 2,100 x 1,795 mm [151.2" x 82.7" x 70.7"]		Main unit: 3,840 x 2,100 x 1,795 mm [151.2" x 82.7" x 70.7"]			
Weight	Main unit: 4,000 kg [8,800 lb] (maximum)		Main unit: 3,720 kg [8,184 lb] (maximum)		Main unit: 3,720 kg [8,184 lb] (maximum)			
Power requirements	Main unit : Single phase 200 to 240 V, 5.2 kW, 32 A Chiller unit : Single phase 200 to 240 V, 0.7 kW, 4 A Blower unit : Single phase 200 to 240 V, 1 kW, 10 A		Main unit : Single phase 200 to 240 V, 5.2 kW, 35 A Chiller unit : Single phase 200 to 240 V, 0.7 kW, 4 A Blower unit : Single phase 200 to 240 V, 1 kW, 10 A		Main unit : Single phase 200 to 240 V, 5.2 kW, 35 A Chiller unit: Single phase 200 to 240 V, 0.7 kW, 4 A (Z and ZX models require two chiller units) Blower unit: Single phase 200 to 240 V, 3 kW, 10 A			
Environment	Recommended: Temperature 21 to 25°C (69.8 to 77°F); Relative humidity: 50 to 70% Required : Temperature 18 to 26°C (64.4 to 78.7°F); Relative humidity: 40 to 70%		Recommended: Temperature 21 to 25°C (69.8 to 77°F); Relative humidity: 50 to 70% Required : Temperature 18 to 26°C (64.4 to 78.7°F); Relative humidity: 40 to 70%		Recommended: Temperature 21 to 25°C (69.8 to 77°F); Relative humidity: 50 to 70% Required : Temperature 18 to 26°C (64.4 to 78.7°F); Relative humidity: 40 to 70%			
Standard accessories	Manual plate loading table, chiller unit, blower unit, signal tower		Manual plate loading table, chiller unit, blower unit, signal tower		Manual plate loading table, chiller unit, blower unit, signal tower			
Optional accessories	Punch systems (various printing press punches), punchless plate handling option, 0.5 mm plate thickness support		Punch systems (various printing press punches), punchless plate handling option, 0.5 mm plate thickness support		Punch systems (various printing press punches), punchless plate handling option, dual plate loading support (S model only), 0.5 mm plate thickness support			
	SA-L48000 Skid, MA-L40000 ^{*6} , AT-M		MA-L40000, SA-L40000 Skid ^{*6} , AT-M		MA-L40000, SA-L40000 Skid ^{*6} , AT-M			

^{*1}: A minimum size of 500 x 550 mm is offered as a factory option.

^{*2}: When the punchless plate handling option is used, the leading edge gripper margin is 5 mm and the trailing edge gripper margin is 7 mm.

^{*3}: When the factory option for support of 0.5 mm thick plates is selected, the supported plate thickness is 0.3 to 0.5 mm. ^{*4}: 1,200 dpi uses doubled 2,400 dpi dots.

^{*5}: For information on system dimensions, please consult your Screen representative. ^{*6}: There are limits to the sizes of plate this unit can handle.

The multi-autoloader system automates everything from plate loading to imaging, transport, developing and unloading in a single ongoing set of operations. It makes it possible to continuously output CIP plates for long periods of time, and significantly increases both productivity and press operating ratios.

Handling a large volume of single-size plates at once Skid autoloader

The Skid autoloader makes it possible to set an entire pallet's worth of large-size plates directly onto a unique skid base. Since a large number of plates of the same size can be set in place at once, the strain involved in plate loading is greatly reduced. The Skid autoloader is an extremely useful component for creating a fully automated CIP line.

- Up to a maximum of 600 plates (for plates 0.3 mm thick; depends on the plate size).
- Not compatible with the PlateRite Ultima 16000.

Choose the right media for the job MA-L (multi-cassette autoloader)

The MA-L is an autoloader that can supply media as needed


from any of its multiple cassettes, each of which can be loaded with a different size or type of media. The MA-L40000 features four cassettes, and can supply up to 300 large-size plates automatically (plate thickness: 0.3 mm).

The MA-L16000N can be equipped with cassettes that hold up to 70 plates*, and can supply a maximum of 420 plates automatically. Units can be equipped with three or six independent cassettes. Even after installation, the three-cassette type can be upgraded to support six cassettes.


* For plates 0.3 mm thick

Space requirements

■ Layout for PlateRite Ultima 40000 with MA-L40000 [units: mm]

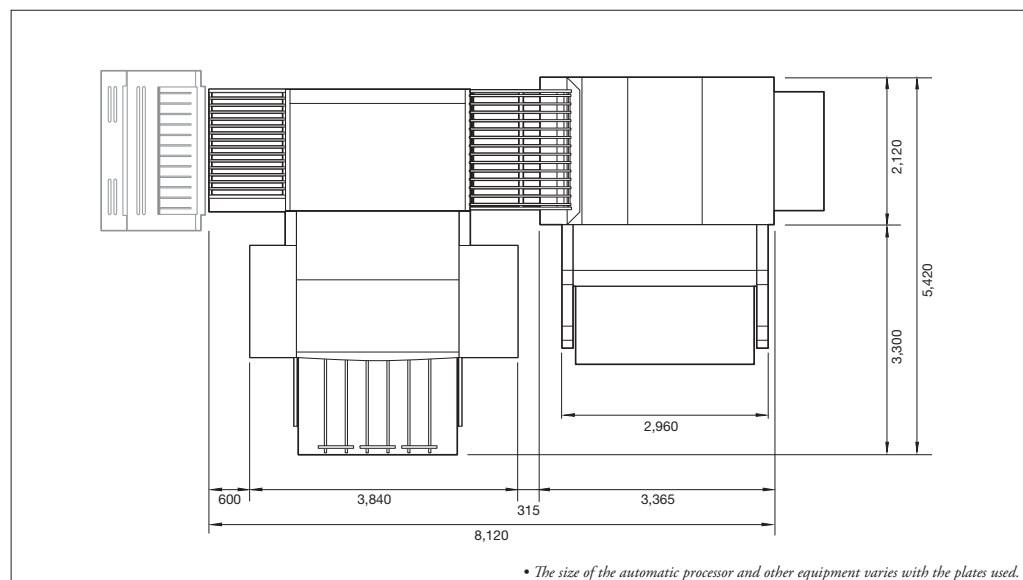

■ Layout for PlateRite Ultima 16000 with MA-L16000N (six-cassette autoloader type) [units: mm]

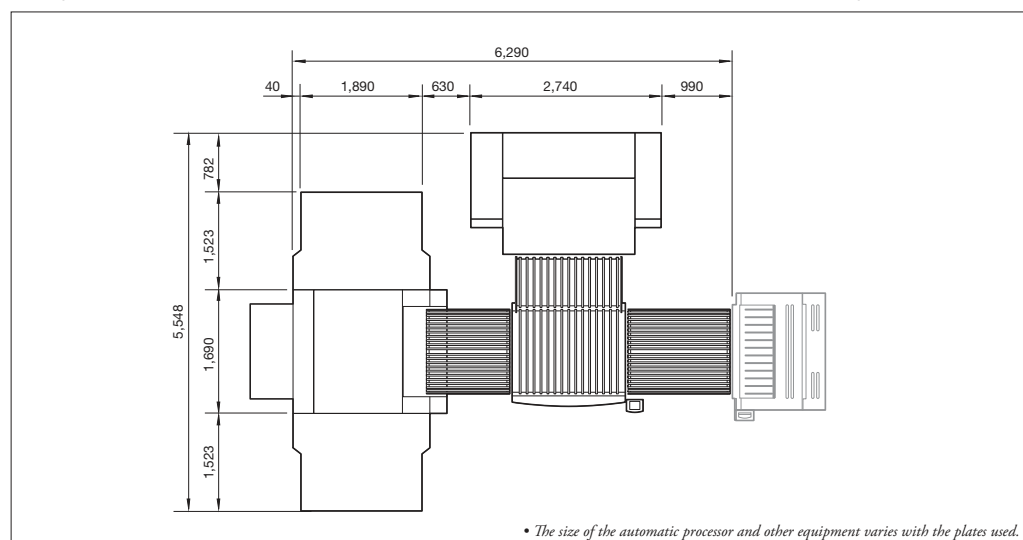

www.screen.co.jp/ctp_no1

For more information, please visit our web site.
You can see product movie, MSDS on it!



SCREEN Graphic and Precision Solutions Co., Ltd.

HEAD OFFICE

• Tenjinkita-machi 1-1, Teranouchi-agaru 4-chome, Horikawa-dori, Kamigyo-ku, Kyoto 602-8585, Japan / Tel: +81-75-414-7610

SCREEN GP Americas, LLC

• 5110 Tollview Drive, Rolling Meadows, IL 60008, U.S.A. / Tel: +1-847-870-7400 / Fax: +1-847-870-0149 www.screenusa.com

SCREEN GP Europe B.V.

• Bouwerij 46, 1185XX Amstelveen, The Netherlands / Tel: +31-20-456-78-00 / Fax: +31-20-456-78-05 www.screeneurope.com
U.K. office / Tel: +44-1582-72-5400 / Fax: +44-1582-72-5405

SCREEN HD Singapore PTE. Ltd.

• 29, Kaki Bukit View, Kaki Bukit Techpark II, Singapore 415963 / Tel: +65-67493833 / Fax: +65-67499010 www.screensp.com.sg
Indian Liaison office / Tel: +91 22-6673-5088 / Fax: +91 22-6673-5087

SCREEN GP China Co., Ltd.

• Room 2001 - 2003, 20/F Cable TV Tower 9 Hoi Shing Road Tuen Wan, N.T. Hong Kong / Tel: +852-2953-0038 / Fax: +852-2755-8683 www.screenchina.com

Shanghai office / Tel: +86-21-3126-5122 / Fax: +86-21-6218-2199

Beijing office / Tel: +86-10-6708-9271, 9272, 9273 / Fax: +86-10-6708-9395

Guangzhou office / Tel: +86-20-3891-1112 / Fax: +86-20-3891-1036

SCREEN GP Taiwan Co., Ltd.

• 4th Floor, No. 126-1, Min-tsu West Road, Taipei, Taiwan R.O.C. / Tel: +886-2-25862711 / Fax: +886-2-25914367

SCREEN HD Korea Co., Ltd.

• Yonsaei Dongrae B/D 10FL, Bongrae-Dong, Joong-Gu, Seoul, 100-161, Korea / Tel: +82-2-727-0860 / Fax: +82-2-727-0876 www.screen-korea.com

SCREEN GP Australia PTY., Ltd.

• Suite 11, 2 Eden Park Drive, Macquarie Park, NSW 2133, Australia / Tel: +61-2-9016-3400 / Fax: +61-2-9016-3425 www.screenaustralia.com.au

Internet web site : www.screen.co.jp/gp
www.screenusa.com
www.screeneurope.com

• This brochure was made using SPEKTA 2 screening.

We reserve the right to alter product design and specifications without prior notice.

No.205-133E Printed in Japan 05-16 060PSI(R4-4)