

ROLLER CONVEYOR FRB-P5, FRB-S5 / SKATEWHEEL CONVEYOR FRB-PK7, FRB-SK7

FEATURES

- Optimal solution for an inexpensive and flexible entry into conveyor technology without a drive.
- Ideal for incoming and outgoing goods where space is limited or no fixed conveyor lines can be installed.
- Small dimensions when pushed together for optimal storage.
- Particularly flexible handling thanks to fixed and swivel castors with brakes for quick and safe locking.
- Stepless height adjustment of the telescopic legs from 700 to 1000 mm for perfect alignment on sloping surfaces.

GENERAL


| Type | Unit | FRB-P5 | FRB-S5 | FRB-PK7 | FRB-SK7 |
|----------------------------|------|---------------------------------|--------|---------|---------|
| Total width | mm | 750 | 650 | 750 | 750 |
| Overall length (retracted) | mm | 1920 | 2040 | 2220 | |
| Overall length (extended) | mm | 4700 | | | 6900 |
| Height | mm | 700 - 1000 | | | |
| Web width | mm | 600 | 500 | 614 | 614 |
| Weight | kg | 97 | 117 | 125 | 146 |
| Load capacity | kg/m | 40 | | | |
| Curve inner radius | mm | 600 | | | |
| Number of axles | | 5 | | 7 | |
| Material frame | | 3 mm carbon steel powder-coated | | | |
| Material of supports | | Galvanised steel | | | |

ROLLS

| Type | unit | FRB-P5 | FRB-S5 | FRB-PK7 | FRB-SK7 |
|-----------------------------|------|--------|------------------|---------|------------------|
| Material | | PVC | Galvanised steel | ABS | Galvanised steel |
| Diameter | mm | 50 | | 48 | 50 |
| Length roll | mm | 253 | 500 | 16 | 22 |
| Max. distance between rolls | mm | 70 | | | |
| Number of rolls per row | | 2 | 1 | 6 | |

WHEELS

| Type | unit | FRB-P5 | FRB-S5 | FRB-PK7 | FRB-SK7 |
|----------------------------------|------|--------|--------|---------|---------|
| Diameter | mm | 100 | | | |
| Material | | Rubber | | | |
| Quantity (without / with brakes) | | 4 / 6 | | 6 / 8 | |

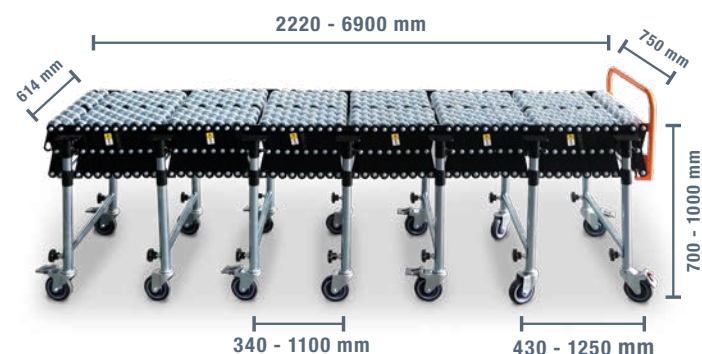

Measurements skatewheel conveyor