



Conventional Horizontal Lathes V-Turn 410/1500



PRODUCT.BROCHURE.SKU: 300821

Our bestseller V-Turn is a precision lathe that is also suitable for production. Equipped with an inverter and a high-performance motor, it achieves spindle speeds of up to 3,000 1/min and processes workpieces with small diameters efficiently and of the best quality. The models also offer strength and stability for heavier machining. When facing, the "constant cutting speed" function integrated in the X-Pos adapts the spindle speed to the turning diameter and thus delivers quality that is comparable to the results of a CNC machine.

- Constant cutting speed
- High spindle speed and motor power
- Extensive standard equipment
- Roller bearing from world-leading manufacturer NSK

PRODUCT.BROCHURE.technical_specs

ATTRIBUTES.MEG-000008.DESCRPTION

attributes.MEG-000008.MER-001279	1500 mm
attributes.MEG-000008.MER-000411	205 mm
attributes.MEG-000008.MER-000063	380 mm
attributes.MEG-000008.MER-000064	580 mm
attributes.MEG-000008.MER-000065	255 mm
attributes.MEG-000008.MER-000055	250 mm
attributes.MEG-000008.MER-000047	250 mm

ATTRIBUTES.MEG-000059.DESCRPTION

attributes.MEG-000059.MER-000287	210 mm
attributes.MEG-000059.MER-000334	140 mm
attributes.MEG-000059.MER-000236	± 45°

ATTRIBUTES.MEG-000007.DESCRPTION

attributes.MEG-000007.MER-000388	550 1/min - 3000 1/min
attributes.MEG-000007.MER-000387	30 1/min - 550 1/min
attributes.MEG-000007.MER-000251	52 mm
attributes.MEG-000007.MER-000259	Camlock D1-6
attributes.MEG-000007.MER-000247	6 MT

ATTRIBUTES.MEG-000006.DESCRPTION

attributes.MEG-000006.MER-000293	0.025 mm/R - 0.85 mm/R
attributes.MEG-000006.MER-000295	0.05 mm/R - 1.7 mm/R

ATTRIBUTES.MEG-000005.DESCRPTION

attributes.MEG-000005.MER-000113	(39) 0,2-14 mm
attributes.MEG-000005.MER-000112	(21) 8-44 DP
attributes.MEG-000005.MER-000114	0.3 mm - 3.5 mm
attributes.MEG-000005.MER-000748	(45) 2-72 TPI

ATTRIBUTES.MEG-000009.DESCRPTION

attributes.MEG-000009.MER-000749	50 mm
attributes.MEG-000009.MER-000194	4 MT
attributes.MEG-000009.MER-000196	120 mm
attributes.MEG-000009.MER-000197	± 13 mm




ATTRIBUTES.MEG-000002.DESCRPTION

attributes.MEG-000002.MER-000159	5.5 kW
----------------------------------	--------

ATTRIBUTES.MEG-000004.DESCRPTION

attributes.MEG-000004.MER-000002-height	2.44 m x 1 m x 1.32 m
attributes.MEG-000004.MER-000108	1800 kg

PRODUCT.BROCHURE.PRODUCT_DETAILS

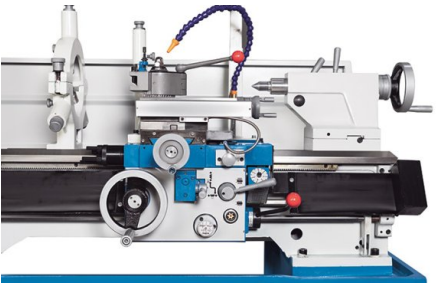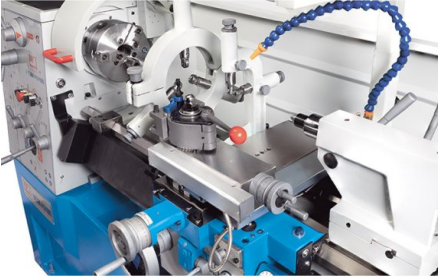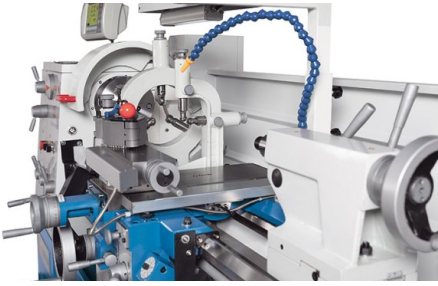

- Constant cutting speed: During face turning, the spindle speed automatically adapts to the changing workpiece diameter – the constant cutting speed at the cutting edge of the turning tool ensures superior turning results with quality comparable to CNC lathes
- A heavy ribbed machine bed and a massive one-piece cast-iron frame provide the solid basis for this machine
- Wide, hardened and ground guideways ensure superior turning results and long life
- Large spindle bearings and high-precision headstock ensure excellent concentricity
- Headstock gears and shafts are hardened and ground for quiet operation und constant speed
- 5.5 kW headstock motor ensures powerful machining
- Spindle speeds are infinitely variable from 30 to 550 and 550 to 3000 rpm
- Micrometer and turret stop are included
- Integrated central lubrication at the support for low maintenance
- The extensive features of the X.Pos Position Indicator are complemented here with a digital tool indicator and an easy to program auxiliary function
- Incl. 3-axis position indicator with integrated spindle speed display, fully assembled
- The electromagnetic brake on the main spindle is maintenance-free and slows the machine safely and reliably

PRODUCT.BROCHURE.CONTROLS&SOFTWARE

3-axis position indicator, X.pos 3.2 VC

- Integrating multiple functions, this new generation of 3 axis digital readouts significantly offer a much better control over the machining processes, greatly decreasing down-times and error rates
- Integrating multiple functions, this new generation of 3 axis digital readouts significantly offer a much better control over the machining processes, greatly decreasing down-times and error rates
- It features a totally sealed enclosure made of high quality polyester film which protects it against hazardous environments in shop floors, such as dust or fumes and offers excellent chemical resistance to most commonly used industry solvents
- The optical scales provide 5 micron resolution (0.005 mm) with outside cover from aluminum for protection against oil, coolant and chips.

Basic Functions

- Resolution of 0,005 mm
- Spindle control ON/OFF
- Unit measurement conversion Inch / Metric
- Setting / Reseting current position
- Coordinate display switching ABS / INC
- Radius / Diameter display
- Z1/Z2 Axes summing
- Pocket calculator functions

Extended Functions

- Axis position is maintained when display is turned off
- Hole circle pattern calculation
- Radius / diameter toggle
- Reference function for tool gauging
- Taper turning function

Constant cutting speed

- Allows you to have constant cutting speed during - the spindle speed automatically adjusts based on the turning diameter

PRODUCT.BROCHURE.STANDARD_EQUIPMENT

Follow rest
 Dead center
 Reducing Sleeve
 3-axis position indicator, X.pos 3.2 VC
 4-jaw face plate chuck Ø 250 mm
 Face plate Ø 350 mm
 Quick change tool holder head WB
 Quick change tool holder WBD 25120
 Coolant system
 Steady rest
 Turret stop
 Micrometer stop
 Chip tray
 Fixed splash guard (wall)
 Protective shield for the toolpost
 Chuck guard
 Foot brake pedal
 Work light
 Thread gauge
 Toolbox with operating tools
 Operator instructions



KNUTH on YouTube

Information to the point

On our YouTube channel you can find videos for nearly all machines from our program. We show the machines from current deliveries and you get an impression of the handling, the processing quality and the machining performance.

**Are you interested in a machine for which you cannot find a current video?
Please feel free to contact us!**