

**Water to water heat pump, reversible
on hydraulic side
38,1-398 kW**



Water to water indoor unit for the production of chilled/hot water with hermetic rotary Scroll compressors, braze-welded plate-type exchanger and electronic expansion valve. Basement and frame in hot-galvanised shaped sheet steel with a suitable thickness. All parts polyester-powder painted to assure total weather resistance, RAL 7035. The range includes the single-circuit two-compressor versions and the dual circuit four-compressor versions.

Version

- Basic

Configurations

H Function with heat pump, reversible on hydraulic side

Features**HIGH EFFICIENCY**

Very high efficiency at full and partial load, at the highest market levels, thanks to the adopted technological solutions. These units ensure low operating costs and therefore a quick payback time.

ErP READY

The highest level of efficiency at part load can meet and exceed the minimum seasonal efficiency for heating, SCOP (only for reversible units) and for cooling, SEER, according with the eco-sustainable design requirements for all products using energy. The units already comply with the minimum seasonal energy efficiency requirements that will start from 2021.

VARIABLE PRIMARY FLOW (OPTION)

Energy saving due to variable pump speed management based on load demand and the variable flow assures the functioning of the units also with critical working conditions. VPF (Variable Primary Flow) available for sizes 0604-1204.

EXTREMELY SILENT OPERATION

Extremely silent operation together with high efficiency, tank to dedicated acoustic devices and a precise design for the choice of the components.

INTEGRATED CONDENSATION'S CONTROL

The electronics of the units manages the most suitable condensing control for each type of application: two or three-way modulating valve and 0-10V signal for variable speed driven pumps.

TOTAL VERSATILITY

Climaveneta has designed the NX-W units with a range of integral accessories in mind for operation with total water loss (well, water bed, etc.), dry cooler or cooling tower and suitable for geothermal application so as to satisfy all service system and installation requirements.

ELECTRONIC EXPANSION VALVE SUPPLIED STANDARD

The use of the electronic expansion valve generates considerable benefits, especially in cases of variable demand and at different working conditions. It guaranteed energy saving due to efficiency optimization in various different working conditions. The electronic thermostatic valve allows you to obtain speed in reaching machine stability and an extension of the operating limits.

Accessory

- Touch Screen visual display
- Set-up for remote connectivity with ModBus/Echelon protocol cards
- Outside air temperature probe for plant water set point compensation.
- Integral acoustical enclosure (type base)
- Thicker soundproofing cladding
- VPF (Variable Primary Flow) system
- Condensing control device: two or three-way modulating pressure-controlled valve and inverter on pumps

Controls**Electronic control W3000TE**

The brand new W3000TE controller offers advanced functions and algorithms.

The keypad W3000 Compact, as standard equipment, features function controls and a complete LCD display for viewing data and activating the unit, via a multilevel menu, with settable display language.

The controller provides water temperature control for the heating systems, cooling systems (only for reversible units), as well as for domestic hot water (only for reversible units). These different temperatures are managed automatically based on the different conditions in which the system operates, with the possibility to assign specific levels of priority to domestic hot water production, depending on the needs of the application.

The regulation is based on the exclusive QuickMind algorithm, including self-adaptive control logics, beneficial in low water content systems. As alternatives the proportional- or proportional- integral regulations are also available.

Diagnostics include complete alarm management, with "blackbox" functions (via PC) and alarm log (display or PC) for best analysis of unit behaviour. For systems made up of multiple units, differentiated device management means just a certain portion of the capacity installed can be dedicated to domestic water production, in this way ensuring more efficient energy distribution and, at the same time, guaranteeing simultaneous water delivery to the different distribution systems. The built-in clock can be used to create an operating profile containing up to 4 typical days and 10 time bands, essential for efficient programming of energy production and fundamental for managing the Legionella prevention cycles. Available time bands also for DHW production.

Supervision is available with different options, using proprietary devices or by integration into third party systems using ModBus, BACnet, BACnet-over-IP and Echelon LonWorks protocols.

A dedicated wall-mounted keypad can be used for remote control of all the functions.

Optionally (VPF package), capacity modulation can be integrated with hydraulic flow modulation, thanks to inverter-driven pumps and to specific resources for the hydraulic circuit.





COOLING

R HFC R-410A

P PLATES

HEATING

SCROLL

NX-W /H		0122	0152	0182	0202	0252	0262	0302	0352	
Power supply		V/ph/Hz	400/3/50	400/3/50	400/3/50	400/3/50	400/3/50	400/3/50	400/3/50	
PERFORMANCE										
COOLING ONLY (GROSS VALUE)										
Cooling capacity	(1)	kW	38,1	47,7	56,2	65,3	72,3	82,3	96,7	111
Total power input	(1)	kW	7,53	9,31	10,8	12,6	13,8	16,0	18,9	21,7
EER	(1)	kW/kW	5,06	5,12	5,20	5,18	5,24	5,14	5,12	5,13
ESEER	(1)	kW/kW	6,46	6,76	6,42	6,47	6,72	6,41	6,49	6,63
COOLING ONLY (EN14511 VALUE)										
Cooling capacity	(1)(2)	kW	37,9	47,5	55,9	65,1	72,0	82,0	96,4	111
EER	(1)(2)	kW/kW	4,85	4,89	4,96	4,96	5,01	4,96	4,94	4,96
ESEER	(1)(2)	kW/kW	5,89	6,10	5,81	5,93	6,12	5,95	6,04	6,13
Cooling energy class			B	B	B	B	B	B	B	B
HEATING ONLY (GROSS VALUE)										
Total heating capacity	(3)	kW	42,4	53,0	62,6	72,6	80,1	91,0	107	123
Total power input	(3)	kW	9,44	11,5	13,3	15,6	17,2	19,6	23,1	26,5
COP		kW/kW	4,49	4,61	4,71	4,65	4,66	4,64	4,64	4,65
HEATING ONLY (EN14511 VALUE)										
Total heating capacity	(3)(2)	kW	42,5	53,2	62,8	72,8	80,4	91,2	107	123
COP	(3)(2)	kW/kW	4,28	4,37	4,46	4,45	4,45	4,46	4,46	4,47
Cooling energy class			B	B	A	A	A	A	A	A
ENERGY EFFICIENCY										
SEASONAL EFFICIENCY IN COOLING (Reg. EU 2016/2281)										
Ambient refrigeration										
Prated,c	(11)	kW	-	-	-	-	-	-	-	-
SEER	(11)(12)		-	-	-	-	-	-	-	-
Performance ηs	(11)(13)	%	-	-	-	-	-	-	-	-
SEASONAL EFFICIENCY IN HEATING (Reg. EU 813/2013)										
PDesign	(4)	kW	51,0	63,7	75,5	87,2	96,9	110	129	149
SCOP	(4)(14)		5,89	5,99	5,87	6,02	6,14	6,07	6,09	6,16
Performance ηs	(4)(15)	%	228	232	227	233	238	235	236	238
Seasonal efficiency class	(4)		A++	A++	A++	-	-	-	-	-
PDesign	(5)	kW	46,1	57,5	67,8	79,1	86,9	98,5	116	133
SCOP	(5)(14)		4,62	4,68	4,73	4,78	4,80	4,79	4,80	4,85
Performance ηs	(5)(15)	%	177	179	181	183	184	184	184	186
Seasonal efficiency class	(5)		A++	A++	A++	-	-	-	-	-
EXCHANGERS										
HEAT EXCHANGER USER SIDE IN REFRIGERATION										
Water flow	(1)	l/s	1,82	2,28	2,69	3,12	3,46	3,94	4,62	5,33
Pressure drop	(1)	kPa	21,6	26,6	26,7	21,8	21,6	21,8	22,7	22,9
HEAT EXCHANGER USER SIDE IN HEATING										
Water flow	(3)	l/s	2,67	3,35	3,99	4,62	5,09	5,78	6,81	7,82
Pressure drop	(3)	kPa	46,4	57,4	59,0	47,8	46,9	47,1	49,3	49,4
HEAT EXCHANGER SOURCE SIDE IN REFRIGERATION										
Water flow	(1)	l/s	2,18	2,72	3,19	3,71	4,11	4,68	5,50	6,34
Pressure drop	(1)	kPa	11,8	15,7	18,1	20,6	23,1	13,5	14,2	14,6
HEAT EXCHANGER SOURCE SIDE IN HEATING										
Water flow	(3)	l/s	2,05	2,56	3,02	3,50	3,87	4,39	5,17	5,94
Pressure drop	(3)	kPa	10,4	13,9	16,2	18,3	20,5	11,9	12,5	12,8
REFRIGERANT CIRCUIT										
Compressors nr.		N°	2	2	2	2	2	2	2	2
No. Circuits		N°	1	1	1	1	1	1	1	1
Refrigerant charge		kg	3,80	4,20	5,00	5,50	6,10	8,60	10,0	11,6
NOISE LEVEL										
Sound Pressure	(6)	dB(A)	57	57	58	58	58	59	60	60
Sound power level in cooling	(7)(8)	dB(A)	73	73	74	74	74	75	76	77
Sound power level in heating	(7)(9)	dB(A)	74	74	75	75	75	76	77	78
SIZE AND WEIGHT										
A	(10)	mm	1225	1225	1225	1225	1225	1225	1225	1570
B	(10)	mm	885	885	885	885	885	885	885	885
H	(10)	mm	1495	1495	1495	1495	1495	1495	1495	1805
Operating weight	(10)	kg	360	360	390	410	440	480	520	660

Notes:

1 Plant (side) cooling exchanger water (in/out) 12°C/7°C; Source (side) heat exchanger water (in/out) 30°C/35°C.

2 Values in compliance with EN14511-3:2013.

3 Plant (side) heating exchanger water (in/out) 40°C/45°C; Source (side) heat exchanger water (in/out) 10°C/7°C

4 Seasonal space heating energy efficiency class LOW TEMPERATURE in AVERAGE climate conditions [REGULATION (EU) N. 813/2013]

5 Seasonal space heating energy efficiency class MEDIA TEMPERATURE in AVERAGE climate conditions [REGULATION (EU) N. 813/2013]

6 Average sound pressure level at 1m distance, unit in a free field on a reflective surface; non-binding value calculated from the sound power level.

7 Sound power on the basis of measurements made in compliance with ISO 9614.

8 Sound power level in cooling, indoors.

9 Sound power level in heating, indoors.

10 Unit in standard configuration/execution, without optional accessories.

11 Seasonal energy efficiency of the cooling environment [REGULATION (EU) N. 2016/2281]

12 Seasonal space heating energy index

13 Seasonal energy efficiency of the space cooling

14 Seasonal performance coefficient

15 Seasonal space heating energy efficiency

The units highlighted in this publication contain HFC R410A [GWP₁₀₀ 2088] fluorinated greenhouse gases.

NX-W /H			0402	0452	0502	0552	0602	0702	0802	0604
Power supply		V/ph/Hz	400/3/50	400/3/50	400/3/50	400/3/50	400/3/50	400/3/50	400/3/50	400/3/50
PERFORMANCE										
COOLING ONLY (GROSS VALUE)										
Cooling capacity	(1)	kW	126	142	157	181	204	231	254	192
Total power input	(1)	kW	24,5	27,7	30,9	35,2	39,6	45,2	51,2	38,3
EER	(1)	kW/kW	5,15	5,12	5,10	5,14	5,16	5,10	4,97	5,01
ESEER	(1)	kW/kW	6,34	6,47	6,32	6,42	6,42	6,50	6,06	6,60
COOLING ONLY (EN14511 VALUE)										
Cooling capacity	(1)(2)	kW	126	141	157	181	204	230	253	191
EER	(1)(2)	kW/kW	4,98	4,96	4,93	4,98	5,00	4,93	4,79	4,88
ESEER	(1)(2)	kW/kW	5,95	6,04	5,92	6,00	6,01	6,03	5,63	6,14
Cooling energy class			B	B	B	B	B	B	B	B
HEATING ONLY (GROSS VALUE)										
Total heating capacity	(3)	kW	139	157	175	200	226	255	283	212
Total power input	(3)	kW	29,9	33,9	37,8	43,0	48,3	54,6	61,5	46,9
COP		kW/kW	4,65	4,63	4,62	4,66	4,67	4,68	4,61	4,51
HEATING ONLY (EN14511 VALUE)										
Total heating capacity	(3)(2)	kW	139	157	175	201	226	256	284	212
COP	(3)(2)	kW/kW	4,48	4,47	4,46	4,49	4,51	4,49	4,40	4,40
Cooling energy class			A	A	A	A	A	A	B	B
ENERGY EFFICIENCY										
SEASONAL EFFICIENCY IN COOLING (Reg. EU 2016/2281)										
Ambient refrigeration										
Prated,c	(11)	kW	-	-	-	-	-	-	-	-
SEER	(11)(12)		-	-	-	-	-	-	-	-
Performance ηs	(11)(13)	%	-	-	-	-	-	-	-	-
SEASONAL EFFICIENCY IN HEATING (Reg. EU 813/2013)										
PDesign	(4)	kW	169	190	211	242	273	308	339	255
SCOP	(4)(14)		6,07	6,10	6,01	6,10	6,11	6,07	5,82	6,18
Performance ηs	(4)(15)	%	235	236	232	236	236	235	225	239
Seasonal efficiency class	(4)		-	-	-	-	-	-	-	-
PDesign	(5)	kW	150	170	189	217	244	277	308	229
SCOP	(5)(14)		4,81	4,85	4,80	4,87	4,86	4,90	4,72	4,81
Performance ηs	(5)(15)	%	184	186	184	187	186	188	181	184
Seasonal efficiency class	(5)		-	-	-	-	-	-	-	-
EXCHANGERS										
HEAT EXCHANGER USER SIDE IN REFRIGERATION										
Water flow	(1)	l/s	6,03	6,78	7,53	8,66	9,78	11,02	12,16	9,17
Pressure drop	(1)	kPa	23,1	23,8	24,4	24,9	25,5	30,7	37,4	17,1
HEAT EXCHANGER USER SIDE IN HEATING										
Water flow	(3)	l/s	8,83	9,96	11,09	12,73	14,36	16,25	17,97	13,36
Pressure drop	(3)	kPa	49,6	51,4	52,9	53,8	55,1	66,7	81,6	36,3
HEAT EXCHANGER SOURCE SIDE IN REFRIGERATION										
Water flow	(1)	l/s	7,17	8,07	8,97	10,30	11,63	13,14	14,55	10,96
Pressure drop	(1)	kPa	15,4	15,9	18,5	18,3	21,0	23,5	28,8	16,2
HEAT EXCHANGER SOURCE SIDE IN HEATING										
Water flow	(3)	l/s	6,71	7,57	8,43	9,67	10,90	12,32	13,68	10,22
Pressure drop	(3)	kPa	13,5	14,0	16,3	16,1	18,5	20,7	25,4	14,1
REFRIGERANT CIRCUIT										
Compressors nr.		N°	2	2	2	2	2	2	2	4
No. Circuits		N°	1	1	1	1	1	1	1	2
Refrigerant charge		kg	13,1	14,8	15,7	18,8	21,4	22,4	22,4	19,3
NOISE LEVEL										
Sound Pressure	(6)	dB(A)	60	61	61	62	62	65	66	69
Sound power level in cooling	(7)(8)	dB(A)	77	78	78	79	79	82	83	86
Sound power level in heating	(7)(9)	dB(A)	78	79	79	80	80	83	84	87
SIZE AND WEIGHT										
A	(10)	mm	1570	1570	1570	1570	1570	1570	1570	2210
B	(10)	mm	885	885	885	885	885	885	885	885
H	(10)	mm	1805	1805	1805	1805	1805	1805	1805	1805
Operating weight	(10)	kg	740	790	820	870	920	940	960	870

Notes:

1 Plant (side) cooling exchanger water (in/out) 12°C/7°C; Source (side) heat exchanger water (in/out) 30°C/35°C.

2 Values in compliance with EN14511-3:2013.

3 Plant (side) heating exchanger water (in/out) 40°C/45°C; Source (side) heat exchanger water (in/out) 10°C/7°C

4 Seasonal space heating energy efficiency class LOW TEMPERATURE in AVERAGE climate conditions [REGULATION (EU) N. 813/2013]

5 Seasonal space heating energy efficiency class MEDIA TEMPERATURE in AVERAGE climate conditions [REGULATION (EU) N. 813/2013]

6 Average sound pressure level at 1m distance, unit in a free field on a reflective surface; non-binding value calculated from the sound power level.

7 Sound power on the basis of measurements made in compliance with ISO 9614.

8 Sound power level in cooling, indoors.

9 Sound power level in heating, indoors.

10 Unit in standard configuration/execution, without optional accessories.

11 Seasonal energy efficiency of the cooling environment [REGULATION (EU) N. 2016/2281]

12 Seasonal space heating energy index

13 Seasonal energy efficiency of the space cooling

14 Seasonal performance coefficient

15 Seasonal space heating energy efficiency


The units highlighted in this publication contain HFC R410A [GWP₁₀₀ 2088] fluorinated greenhouse gases.

NX-W /H			0704	0804	0904	1004	1104	1204
Power supply		V/ph/Hz	400/3/50	400/3/50	400/3/50	400/3/50	400/3/50	400/3/50
PERFORMANCE								
COOLING ONLY (GROSS VALUE)								
Cooling capacity	(1)	kW	221	250	281	313	359	398
Total power input	(1)	kW	43,9	49,6	56,1	62,5	71,3	80,0
EER	(1)	kW/kW	5,03	5,04	5,01	5,00	5,04	4,98
ESEER	(1)	kW/kW	6,64	6,58	6,64	6,53	6,61	6,57
COOLING ONLY (EN14511 VALUE)								
Cooling capacity	(1)(2)	kW	220	249	281	312	358	397
EER	(1)(2)	kW/kW	4,91	4,91	4,88	4,86	4,89	4,81
ESEER	(1)(2)	kW/kW	6,16	6,12	6,13	6,02	6,03	5,96
Cooling energy class			B	B	B	B	B	B
HEATING ONLY (GROSS VALUE)								
Total heating capacity	(3)	kW	243	274	309	345	396	440
Total power input	(3)	kW	53,8	60,6	68,2	76,5	87,1	98,1
COP		kW/kW	4,52	4,53	4,54	4,51	4,54	4,49
HEATING ONLY (EN14511 VALUE)								
Total heating capacity	(3)(2)	kW	244	275	310	346	396	442
COP	(3)(2)	kW/kW	4,40	4,41	4,41	4,37	4,38	4,31
Cooling energy class			B	B	B	B	B	B
ENERGY EFFICIENCY								
SEASONAL EFFICIENCY IN COOLING (Reg. EU 2016/2281)								
Ambient refrigeration								
Prated,c	(11)	kW	-	-	-	-	358	397
SEER	(11)(12)		-	-	-	-	5,89	5,79
Performance ηs	(11)(13)	%	-	-	-	-	228	224
SEASONAL EFFICIENCY IN HEATING (Reg. EU 813/2013)								
PDesign	(4)	kW	294	332	371	416	-	-
SCOP	(4)(14)		6,17	6,17	6,27	6,05	-	-
Performance ηs	(4)(15)	%	239	239	243	234	-	-
Seasonal efficiency class	(4)		-	-	-	-	-	-
PDesign	(5)	kW	263	297	335	374	-	-
SCOP	(5)(14)		4,83	4,90	4,93	4,85	-	-
Performance ηs	(5)(15)	%	185	188	189	186	-	-
Seasonal efficiency class	(5)		-	-	-	-	-	-
EXCHANGERS								
HEAT EXCHANGER USER SIDE IN REFRIGERATION								
Water flow	(1)	l/s	10,57	11,96	13,45	14,95	17,18	19,05
Pressure drop	(1)	kPa	18,1	20,0	21,3	24,9	28,2	34,7
HEAT EXCHANGER USER SIDE IN HEATING								
Water flow	(3)	l/s	15,34	17,33	19,54	21,77	24,99	27,73
Pressure drop	(3)	kPa	38,1	42,0	45,0	52,7	59,7	73,6
HEAT EXCHANGER SOURCE SIDE IN REFRIGERATION								
Water flow	(1)	l/s	12,62	14,27	16,07	17,87	20,51	22,78
Pressure drop	(1)	kPa	17,4	19,6	22,0	24,8	30,0	36,2
HEAT EXCHANGER SOURCE SIDE IN HEATING								
Water flow	(3)	l/s	11,73	13,25	14,93	16,66	19,09	21,25
Pressure drop	(3)	kPa	15,1	16,9	19,0	21,6	26,0	31,5
REFRIGERANT CIRCUIT								
Compressors nr.		N°	4	4	4	4	4	4
No. Circuits		N°	2	2	2	2	2	2
Refrigerant charge		kg	22,5	25,3	28,8	41,1	47,0	49,0
NOISE LEVEL								
Sound Pressure	(6)	dB(A)	70	71	72	73	74	74
Sound power level in cooling	(7)(8)	dB(A)	87	88	89	90	91	91
Sound power level in heating	(7)(9)	dB(A)	88	89	90	91	92	92
SIZE AND WEIGHT								
A	(10)	mm	2210	2650	2650	2650	2650	2650
B	(10)	mm	885	885	885	885	885	885
H	(10)	mm	1805	1805	1805	1805	1805	1805
Operating weight	(10)	kg	1050	1240	1330	1530	1630	1710

Notes:

- Plant (side) cooling exchanger water (in/out) 12°C/7°C; Source (side) heat exchanger water (in/out) 30°C/35°C.
 - Values in compliance with EN14511-3:2013.
 - Plant (side) heating exchanger water (in/out) 40°C/45°C; Source (side) heat exchanger water (in/out) 10°C/7°C
 - Seasonal space heating energy efficiency class LOW TEMPERATURE in AVERAGE climate conditions [REGULATION (EU) N. 813/2013]
 - Seasonal space heating energy efficiency class MEDIA TEMPERATURE in AVERAGE climate conditions [REGULATION (EU) N. 813/2013]
 - Average sound pressure level at 1m distance, unit in a free field on a reflective surface; non-binding value calculated from the sound power level.
 - Sound power on the basis of measurements made in compliance with ISO 9614.
 - Sound power level in cooling, indoors.
 - Sound power level in heating, indoors.
 - Unit in standard configuration/execution, without optional accessories.
 - Seasonal energy efficiency of the cooling environment [REGULATION (EU) N. 2016/2281]
 - Seasonal space heating energy index
 - Seasonal energy efficiency of the space cooling
 - Seasonal performance coefficient
 - Seasonal space heating energy efficiency
- The units highlighted in this publication contain HFC R410A [GWP₁₀₀ 2088] fluorinated greenhouse gases.
Certified data in EUROVENT

Size 0122-802

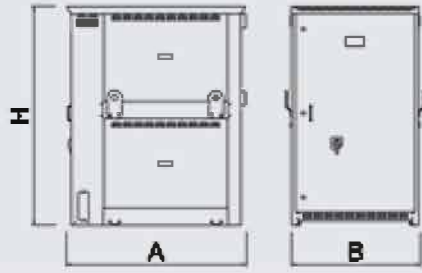

Size 0604-1204

