


Rietstrasse 11
8317 Tagelswangen/Switzerland
www.herzoggraphics.ch
Tel +41 52 3551355
Fax +41 52 3551359
e-mail info@herzoggraphics.ch

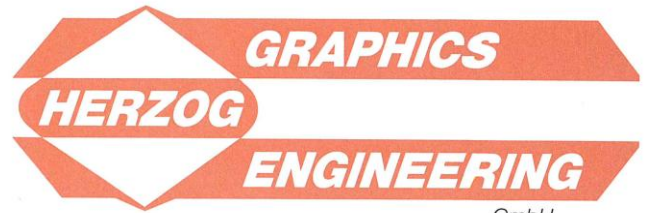


GmbH


Your reliable Swiss supplier !

QUOTATION AND PURCHASE AGREEMENT

Dear Sirs

We are pleased to submit you the following offer for a **SL laminator NORDMECCANICA** :

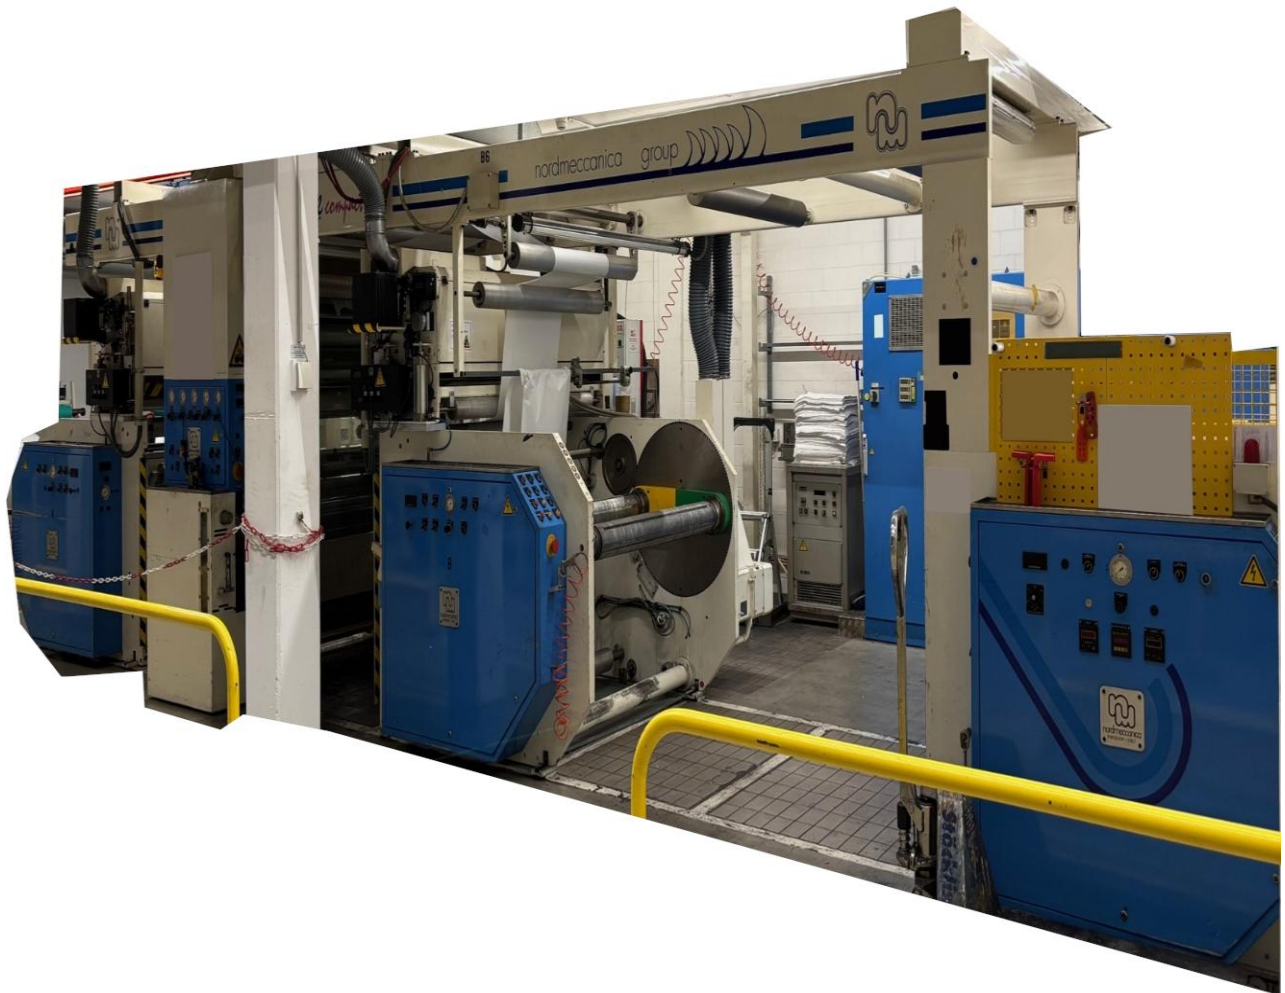

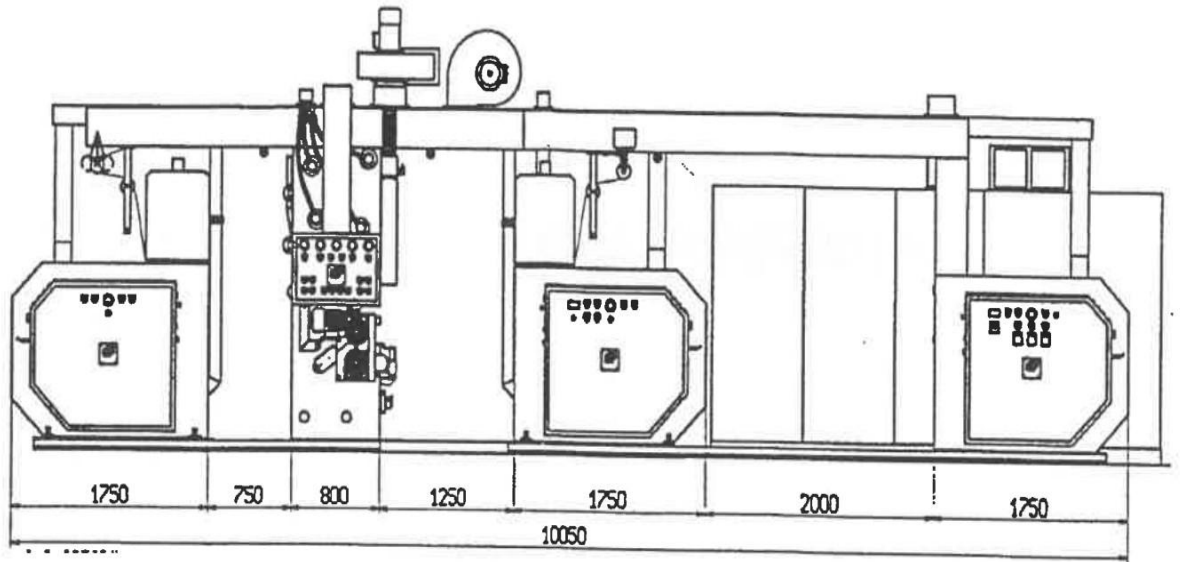

ABWICKLER "A" "850"

KASCHIERER SL

ABWICKLER "B" "850"

AUFWICKLER "850"

Unwinder "A" "850"


Laminator SL

Unwinder "B" "850"

Rewinder "850"





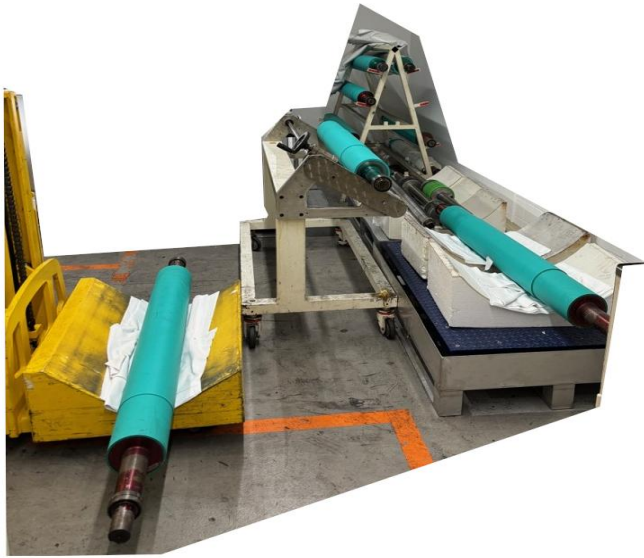

Description	Price																																								
LAMINATOR NORDMECCANICA Duplex SL 1,30 m	EUR 38 000																																								
Type of machine	Roll to roll machine for lamination, coating and lacquering with solventless adhesives.																																								
Manufacturer	NORDMECCANICA																																								
Type	Duplex Compact																																								
Model	Duplex C - SL1300																																								
Year of manufacturing	1995																																								
Web width	650 to 1 310 mm																																								
Coating width	Upto 1 300 mm																																								
Speed	Mechanical Upto 300 m/Min.																																								
Materials for coating	<table> <tr><td>BOPP</td><td>15</td><td>-</td><td>80 my</td></tr> <tr><td>PETP</td><td>12</td><td>-</td><td>30 my</td></tr> <tr><td>LDPE, LLDPE</td><td>40</td><td>-</td><td>200 my</td></tr> <tr><td>OPA</td><td>12</td><td>-</td><td>18 my</td></tr> <tr><td>NYLON CAST</td><td>50</td><td>-</td><td>80 my</td></tr> <tr><td>ALUMINIUM</td><td>15</td><td>-</td><td>40 my</td></tr> <tr><td>PP CAST</td><td>60</td><td>-</td><td>150 my</td></tr> <tr><td>SATIN PAPER</td><td>40</td><td>-</td><td>300 g/m2</td></tr> </table>	BOPP	15	-	80 my	PETP	12	-	30 my	LDPE, LLDPE	40	-	200 my	OPA	12	-	18 my	NYLON CAST	50	-	80 my	ALUMINIUM	15	-	40 my	PP CAST	60	-	150 my	SATIN PAPER	40	-	300 g/m2								
BOPP	15	-	80 my																																						
PETP	12	-	30 my																																						
LDPE, LLDPE	40	-	200 my																																						
OPA	12	-	18 my																																						
NYLON CAST	50	-	80 my																																						
ALUMINIUM	15	-	40 my																																						
PP CAST	60	-	150 my																																						
SATIN PAPER	40	-	300 g/m2																																						
Materials for laminating	<table> <tr><td>BOPP</td><td>12</td><td>-</td><td>80 my</td></tr> <tr><td>PETP</td><td>12</td><td>-</td><td>30 my</td></tr> <tr><td>LDPE, LLDPE</td><td>20</td><td>-</td><td>200 my</td></tr> <tr><td>OPA</td><td>12</td><td>-</td><td>18 my</td></tr> <tr><td>NYLON cast</td><td>20</td><td>-</td><td>80 my</td></tr> <tr><td>ALUMINIUM</td><td>7</td><td>-</td><td>40 my</td></tr> <tr><td>PP CAST</td><td>25</td><td>-</td><td>150 my</td></tr> <tr><td>EVOH</td><td>12</td><td>-</td><td>20 my</td></tr> <tr><td>CAST MATERIALS</td><td>25</td><td>-</td><td>200 my</td></tr> <tr><td>SATIN PAPER</td><td>40</td><td>-</td><td>300 g/m2</td></tr> </table>	BOPP	12	-	80 my	PETP	12	-	30 my	LDPE, LLDPE	20	-	200 my	OPA	12	-	18 my	NYLON cast	20	-	80 my	ALUMINIUM	7	-	40 my	PP CAST	25	-	150 my	EVOH	12	-	20 my	CAST MATERIALS	25	-	200 my	SATIN PAPER	40	-	300 g/m2
BOPP	12	-	80 my																																						
PETP	12	-	30 my																																						
LDPE, LLDPE	20	-	200 my																																						
OPA	12	-	18 my																																						
NYLON cast	20	-	80 my																																						
ALUMINIUM	7	-	40 my																																						
PP CAST	25	-	150 my																																						
EVOH	12	-	20 my																																						
CAST MATERIALS	25	-	200 my																																						
SATIN PAPER	40	-	300 g/m2																																						
Unwinder A	<table> <tr><td>Model</td><td>850</td></tr> <tr><td>Reel change</td><td>Autom. upto 300 my</td></tr> <tr><td>Reel Ø</td><td>90 to 850 mm</td></tr> <tr><td>Reel weight</td><td>Upto 900 kg</td></tr> <tr><td>Sleeve Ø</td><td>70 /76 /150 /152 mm</td></tr> <tr><td>Web tension</td><td>2,5 to 55 kg</td></tr> <tr><td>Thickness</td><td>Upto 300 my</td></tr> <tr><td>Pretreatment</td><td>Corona</td></tr> </table>	Model	850	Reel change	Autom. upto 300 my	Reel Ø	90 to 850 mm	Reel weight	Upto 900 kg	Sleeve Ø	70 /76 /150 /152 mm	Web tension	2,5 to 55 kg	Thickness	Upto 300 my	Pretreatment	Corona																								
Model	850																																								
Reel change	Autom. upto 300 my																																								
Reel Ø	90 to 850 mm																																								
Reel weight	Upto 900 kg																																								
Sleeve Ø	70 /76 /150 /152 mm																																								
Web tension	2,5 to 55 kg																																								
Thickness	Upto 300 my																																								
Pretreatment	Corona																																								
Unwinder B	<table> <tr><td>Model</td><td>850</td></tr> <tr><td>Reel change</td><td>Autom. upto 300 my</td></tr> <tr><td>Reel Ø</td><td>90 to 850 mm</td></tr> <tr><td>Reel weight</td><td>Upto 900 kg</td></tr> <tr><td>Sleeve Ø</td><td>70 /76 /150 /152 mm</td></tr> <tr><td>Web tension</td><td>2,5 to 55 kg</td></tr> <tr><td>Thickness</td><td>Upto 300 my</td></tr> <tr><td>Pretreatment</td><td>Corona</td></tr> </table>	Model	850	Reel change	Autom. upto 300 my	Reel Ø	90 to 850 mm	Reel weight	Upto 900 kg	Sleeve Ø	70 /76 /150 /152 mm	Web tension	2,5 to 55 kg	Thickness	Upto 300 my	Pretreatment	Corona																								
Model	850																																								
Reel change	Autom. upto 300 my																																								
Reel Ø	90 to 850 mm																																								
Reel weight	Upto 900 kg																																								
Sleeve Ø	70 /76 /150 /152 mm																																								
Web tension	2,5 to 55 kg																																								
Thickness	Upto 300 my																																								
Pretreatment	Corona																																								

Coating and lamination unit	For solventless adhesives. Coating group with 4 rollers of which 2 are heatable. Laminating group with 3 rollers.	
Rewinder	Model	850
	Reel change	Autom. upto 300 my
	Reel Ø	170 to 850 mm
	Reel weight	Upto 900 kg
	Sleeve Ø	150 /152 mm
	Web tension	6 to 55 kg
	Thickness	Upto 500 my
Mixing and dosing unit	Manufacturer	DOPAG, Switzerland
	Model	Variomix
Heaters	For assembling transfer roller for adhesives.	
1 Trolley		
Various spare parts		
Electric connection	220 V, 3 x 400 V, 50 Hz	
Installed power	180 kW	
Current	Max. 90 Amp	
Current average consumption	35 kW	
Pneumatic air	Pressure	7 and 10 bar
	Consumption	Max. 400 liter/min
Water consumption	2000 liter/hour	
Standards	CE CEE 89 / 392 ff. EN 60 204-1 SUVA	
Condition	Preowned	
Availability	Immediate	

Quote is valid 1 month and subject to prior sale. Prices are in Euro, ex place factory floor, where it is, as it is, excluding value added tax V.A.T.; no V.A.T. and no export taxes when exported. Specifications provided are per the present users, the original manufacturers and per the best of our knowledge, without our warranty; the goods will be sold in actual condition. Payment 50% with order and 50% before dismantling by buyer; bank transfer charges are the responsibility of the buyer. Severability clause: If any clause of this contract be invalid, the remaining clauses shall remain valid. This contract is under Swiss law, excluding Vienna purchasing law CISG; place of jurisdiction is Pfäffikon, Zürich, Switzerland.

For ordering kindly send us back a signed copy of this quote. We assure you correct and prompt processing and we are looking forward to receiving your esteemed order.

Confirmation of purchase:

J. Herzog

Buyer

Supplier
HERZOG GRAPHICS ENG. GmbH

27 April 2026

Date

P.O. Number

Date