

Decanter centrifuges, D-Series

High performance





Decanter centrifuges, D-Series

High performance

With more than 15.000 installed machines, ANDRITZ SEPARATION is one of the leading suppliers of decanter centrifuges. The D-Series with its optimized HP-Scroll is mainly used for compressible media like all kind of sludge, but also for food, bio-ethanol and slop oil applications.

Our decanter centrifuge fits in with our customers' needs.

Our rotor is the most polyvalent available on the market

Its specific design and open flight permit use of the entire volume and provide extremely good clarification results; extraction of sludge is simplified by the angle, and the acceleration (3000G) is a good compromise between the highest dryness and the right power consumption.

An unrivalled operational convenience


The main operating parameters can be adjusted independently of one another and with high accuracy: bowl speed (efficiency of solid/liquid separation), relative scroll speed (residence time, hence dryness), pond depth (clarification).

Well-balanced operating costs

The polymer dosage is optimised. Flocculation is carried out at the feed in order to leave sufficient contact time for formation of resistant flocs; the distributor (feed chamber) shape avoids swift polymer passage with centrate whose residence time in the decanter is very short.

We provide advice and investigate your project with you

Sizing is performed according to sludge type, flow, expected performance, operating time, power consumption, and polymer dosage.

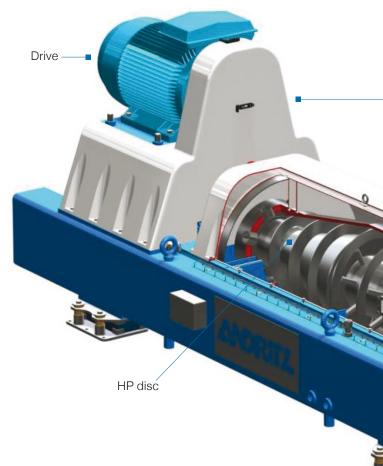




Easy dismantling and maintenance



Compact in-line design

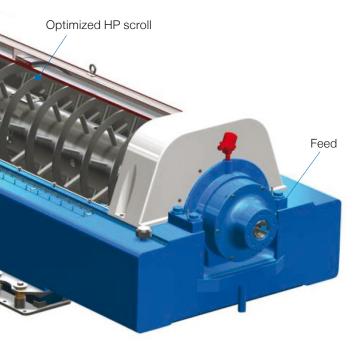


D-series decanter with double coaxial drive

The decanter allows treatment of difficult and varying sludge qualities with the following benefits:

- No operator supervision (automatic operation)
- Simplified civil engineering (very compact installation)
- No prior thickening, therefore no double flocculation (direct dewatering immediately downstream of a clarifier or aeration pool)
- Clean, efficient and water-saving technology
- Reduced and easy maintenance

The patented TC-Drive

- Energy consumption reduced by 10%
- Very reduced height and length
- Further reduction of vibrations (e.g. no V-belts required)





Optimized abrasion protection by replaceable tungsten carbide tiles



Models - From D2 to D12

Approximate design flow rate (m³/h) suspended solids ≈ 0.5% w/w (feed concentration) D2N D₂L D2LL D₃L D3LL D4L D4LL D₅L D5LX D6LX D7LL D10LL D12LL Type m³/h 4 6 8 16 22 30 37 50 95 130 175 280 65







AFRICA

ANDRITZ Delkor (Pty) Ltd.

Phone: +27 (11) 466 2361 Fax: +27 (86) 636 2122 separation.za@andritz.com

ASIA

ANDRITZ Singapore Pte. Ltd.

Phone: +65 (6512) 1800 Fax: +65 (6863) 4482 separation.sg@andritz.com

AUSTRALIA

ANDRITZ Pty. Ltd.

Phone: +61 (3) 8773 4888 Fax: +61 (3) 8773 4899 separation.au@andritz.com

CHINA

ANDRITZ (China) Ltd.

Phone: +86 (757) 6663 3419 Fax: +86 (757) 6663 3448 separation.cn@andritz.com

EUROPE

ANDRITZ AG

Phone: +43 (316) 6902 2318 Fax: +43 (316) 6902 92318 separation@andritz.com

NORTH AMERICA ANDRITZ SEPARATION Inc.

Phone: +1 (817) 465 5611

Fax: +1 (817) 468 3961 separation.us@andritz.com

SOUTH AMERICA

ANDRITZ SEPARATION Ltda.

Phone: +55 (47) 3387 9110 Fax: + 55 (47) 3387 9103 separation.bra@andritz.com

www.andritz.com