



Machine characteristics:

Machine type: OVJA 1.6 ET (3WT) (Mark|551)
Machine number: 5 2 3 7 2

(Please indicate when placing enquiries or ordering spare parts)

Year of construction: 2002

Producer: Mayer & Cie. GmbH & Co.
Rundstrickmaschinen
D-72461 Albstadt
Telefon: (07432) 700-0
Telefax: (07432) 700-315
Telex: 763894

Country of origin: Germany

Machine model: Large-scale rib knitting machine

Production possibilities: Knitting machine for the production of knitted fabrics

Technical data:

Nominal cylinder diameter: 762 mm
30 inch

Machine gauge E: 18

Gauge: 1,41 mm

Number of feeders: 48

Number of needles: 2 X 1728

Driving power of motor: 4 / kW

Working voltage: 380 Volt

Frequency: 50 Hz

Nominal speed: 20 U/min.

Air connection: 6 bar

Sound level: In accordance with DIN 45 635 Sec. 32:
dB(A)
with a knitting speed of: m/s

OPERATING INSTRUCTIONS
FOR
MAYER & CIE CIRCULAR KNITTING MACHINES

TYPE: " OVJA 1.6 ET-3 WT "
TYPE: " OVJA 1.6 ETR-3 WT "

0. Table of contents.....	0/1 ... 0/4
1. Machine characteristics.....	1/1 ... 1/3
Needle oil regulations.....	1/3
2. Safety instructions.....	2/1 ... 2/3
3. General description.....	3/1 ... 3/3
4. Technical data.....	4/1
5. Rotational speeds.....	5/1
6. Installation diagram.....	6/1
7. Structural and functional assemblies.....	7/1 ... 7/2
8. Operating elements on the machine.....	8/1
9. Survey of the machine head.....	9/1 ... 9/2
10. Survey of needles and sinkers.....	10/1
11. Cylinder needles (standard).....	11/1
12. Intermediate jack selectors.....	12/1
13. Control sinkers.....	13/1
14. Dial needles (standard).....	14/1
15. Dial needles (elastomer plating).....	15/1
16. Special needles without transfer.....	16/1
17. Special needles for elastomer plating without transfer.....	17/1
18. Survey of cylinder cam – outside view.....	18/1



19. Survey of cylinder cam – inside view	19/1	
20. Cylinder cam "knit" – outside view	20/1	
21. Cylinder cam "knit" – inside view	21/1	
22. Cylinder cam "transfer" – outside view	22/1	
23. Cylinder cam "transfer" – inside view	23/1	
24. Needle cam "knit" – outside view	24/1	
25. Needle cam "knit" – inside view	25/1	
26. Control sinker cam "knit" – outside view	26/1	
27. Control sinker cam "knit" – inside view	27/1	
28. Control sinker positions.....	28/1	28/2
29. Needle cam "transfer" – outside view.....	29/1	
30. Needle cam "transfer" – inside view.....	30/1	
31. Control sinker cam "transfer" – outside view	31/1	
32. Control sinker cam "transfer" – inside view	32/1	
33. Control sinker positions at transfer feeders.....	33/1	
34. Conversion of control sinker cam "transfer" for knitting	34/1	
35. Stitch cam variations at cylinder cam	35/1	
36. Stitch cam replacement at cylinder cam.....	36/1	
37. Stitch cam setting dimensions at cylinder cam.....	37/1	
38. Transfer cam setting dimensions at cylinder cam.....	38/1	
39. Segment mounting at cylinder cam.....	39/1	39/2
40. Cylinder needle insertion gauge	40/1	
41. Cylinder cam functions at knitting feeder	41/1	
42. Cylinder cam functions at transfer feeder	42/1	
43. Survey of dial cam – outside view	43/1	
44. Survey of dial cam – inside view	44/1	
45. Dial cam "knit" – outside view.....	45/1	



46. Dial cam "knit" – inside view.....	46/1
47. Dial cam "transfer" – outside view.....	47/1
48. Dial cam "transfer" – inside view.....	48/1
49. Switching of dial cams.....	49/1
50. Stitch cam variations and stitch cam replacement (dial cam).....	50/1
51. Stitching cam setting dimension at dial cam.....	51/1
52. Segment mounting and needle change at the dial cam.....	52/1
53. Dial needle insertion gauge.....	53/1
54. Use of the dial needle insertion gauge.....	54/1
55. Positioning gauge for dial needles.....	55/1
56. Dial cam relief segment.....	56/1 ... 56/2
57. Dial cam settings.....	57/1 ... 57/3
58. Patterning unit.....	58/1 ... 58/2
59. Control sinker selection range.....	59/1 ... 59/2
60. Selection functions of patterning unit.....	60/1
61. Removing and mounting a control magnet.....	61/1 ... 61/2
62. Replacing a control magnet.....	62/1 ... 62/2
63. Magnet setting.....	63/1 ... 63/3
64. Control sinker monitoring.....	64/1 ... 64/2
65. Cleaning and maintenance of control magnets.....	65/1
66. Trick sensor.....	66/1 ... 66/2
67. Zero sensor.....	67/1 ... 67/3
68. Cylinder/dial.....	68/1
69. Transfer needle position and setting device.....	69/1
70. Synchronized and delayed timing.....	70/1 ... 70/2
71. Yarn guide setting with synchronized and delayed timing.....	71/1
72. Yarn guide setting dimensions.....	72/1



73. Yarn guide adjusting devices.....	73/1
74. Yarn feeding at the yarn guide.....	74/1
75. Latch openers.....	75/1 ... 75/2
76. Latch holding-down element at the dial cam transfer feeder	76/1
77. Needle home position.....	77/1
78. Transfer stitch structure (transfer pattern).....	78/1
79. Examples of patterns.....	79/1 ... 79/5
80. Possible needle controls	80/1
81. Examples of knitted structures	81/1 ... 81/21
82. Default pattern	82/1
83. Weft thread device	83/1
Update index.....	U/1

The operating manual also describes devices, spare parts or other parts which do not belong to the standard design of the machine and are delivered at an additional charge if ordered by the client. No rights to the equipment of machines with such parts or devices can be derived from the operating instructions.


We reserve the right to make changes and additions!

© 2000 Mayer & Cie. GmbH & Co. , Albstadt, Germany



Mayer & Cie.

Emil-Mayer-Str. 10 · D-72461 Albstadt · ☎ +49-7432-700-0

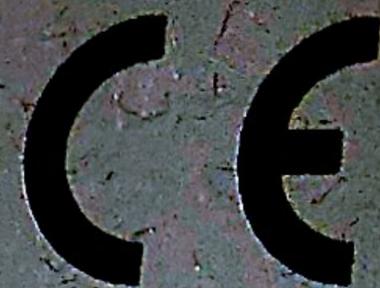

Made in Germany

Typ

OVJA 1.6 ET / 3WT

Maschinen-Nr.

5 3 7 2

Baujahr

2002

Nenndurchmesser

762 mm 30 inch

Teilung

1.41 mm

Feinheit

18 E

Nadelanzahl

2 x 1728

Sum counter:

1088

0

Shift: A

9969132

In production

Rapport : makr316 is knitting

Remark : -----


Configured for:

3-way

Rotation : 4

Needle : 4

ESC: Stop



F1

F2

F3

F4

F5

F6

ESC

7

8

9



4

5

6



M



1

2

3



0

ENTER

Sum counter:

083

Shift: A

9-69132

RPM:

0



Total running time
[1/100 hours]:

[hours:min:sec]: 024278:03:35

--	--	--	--	--	--

Sum counter: 108

RPM: 0

Shift: A 9969132

Error storage feeder
(150)

1 Operation with pattern

2 Rapport data management


3 Change general data


4 Change feeder selection

5 Error statistics

6 System functions

7 -

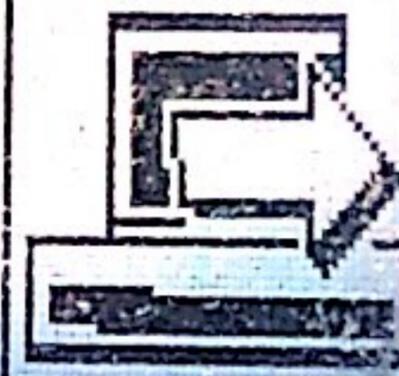

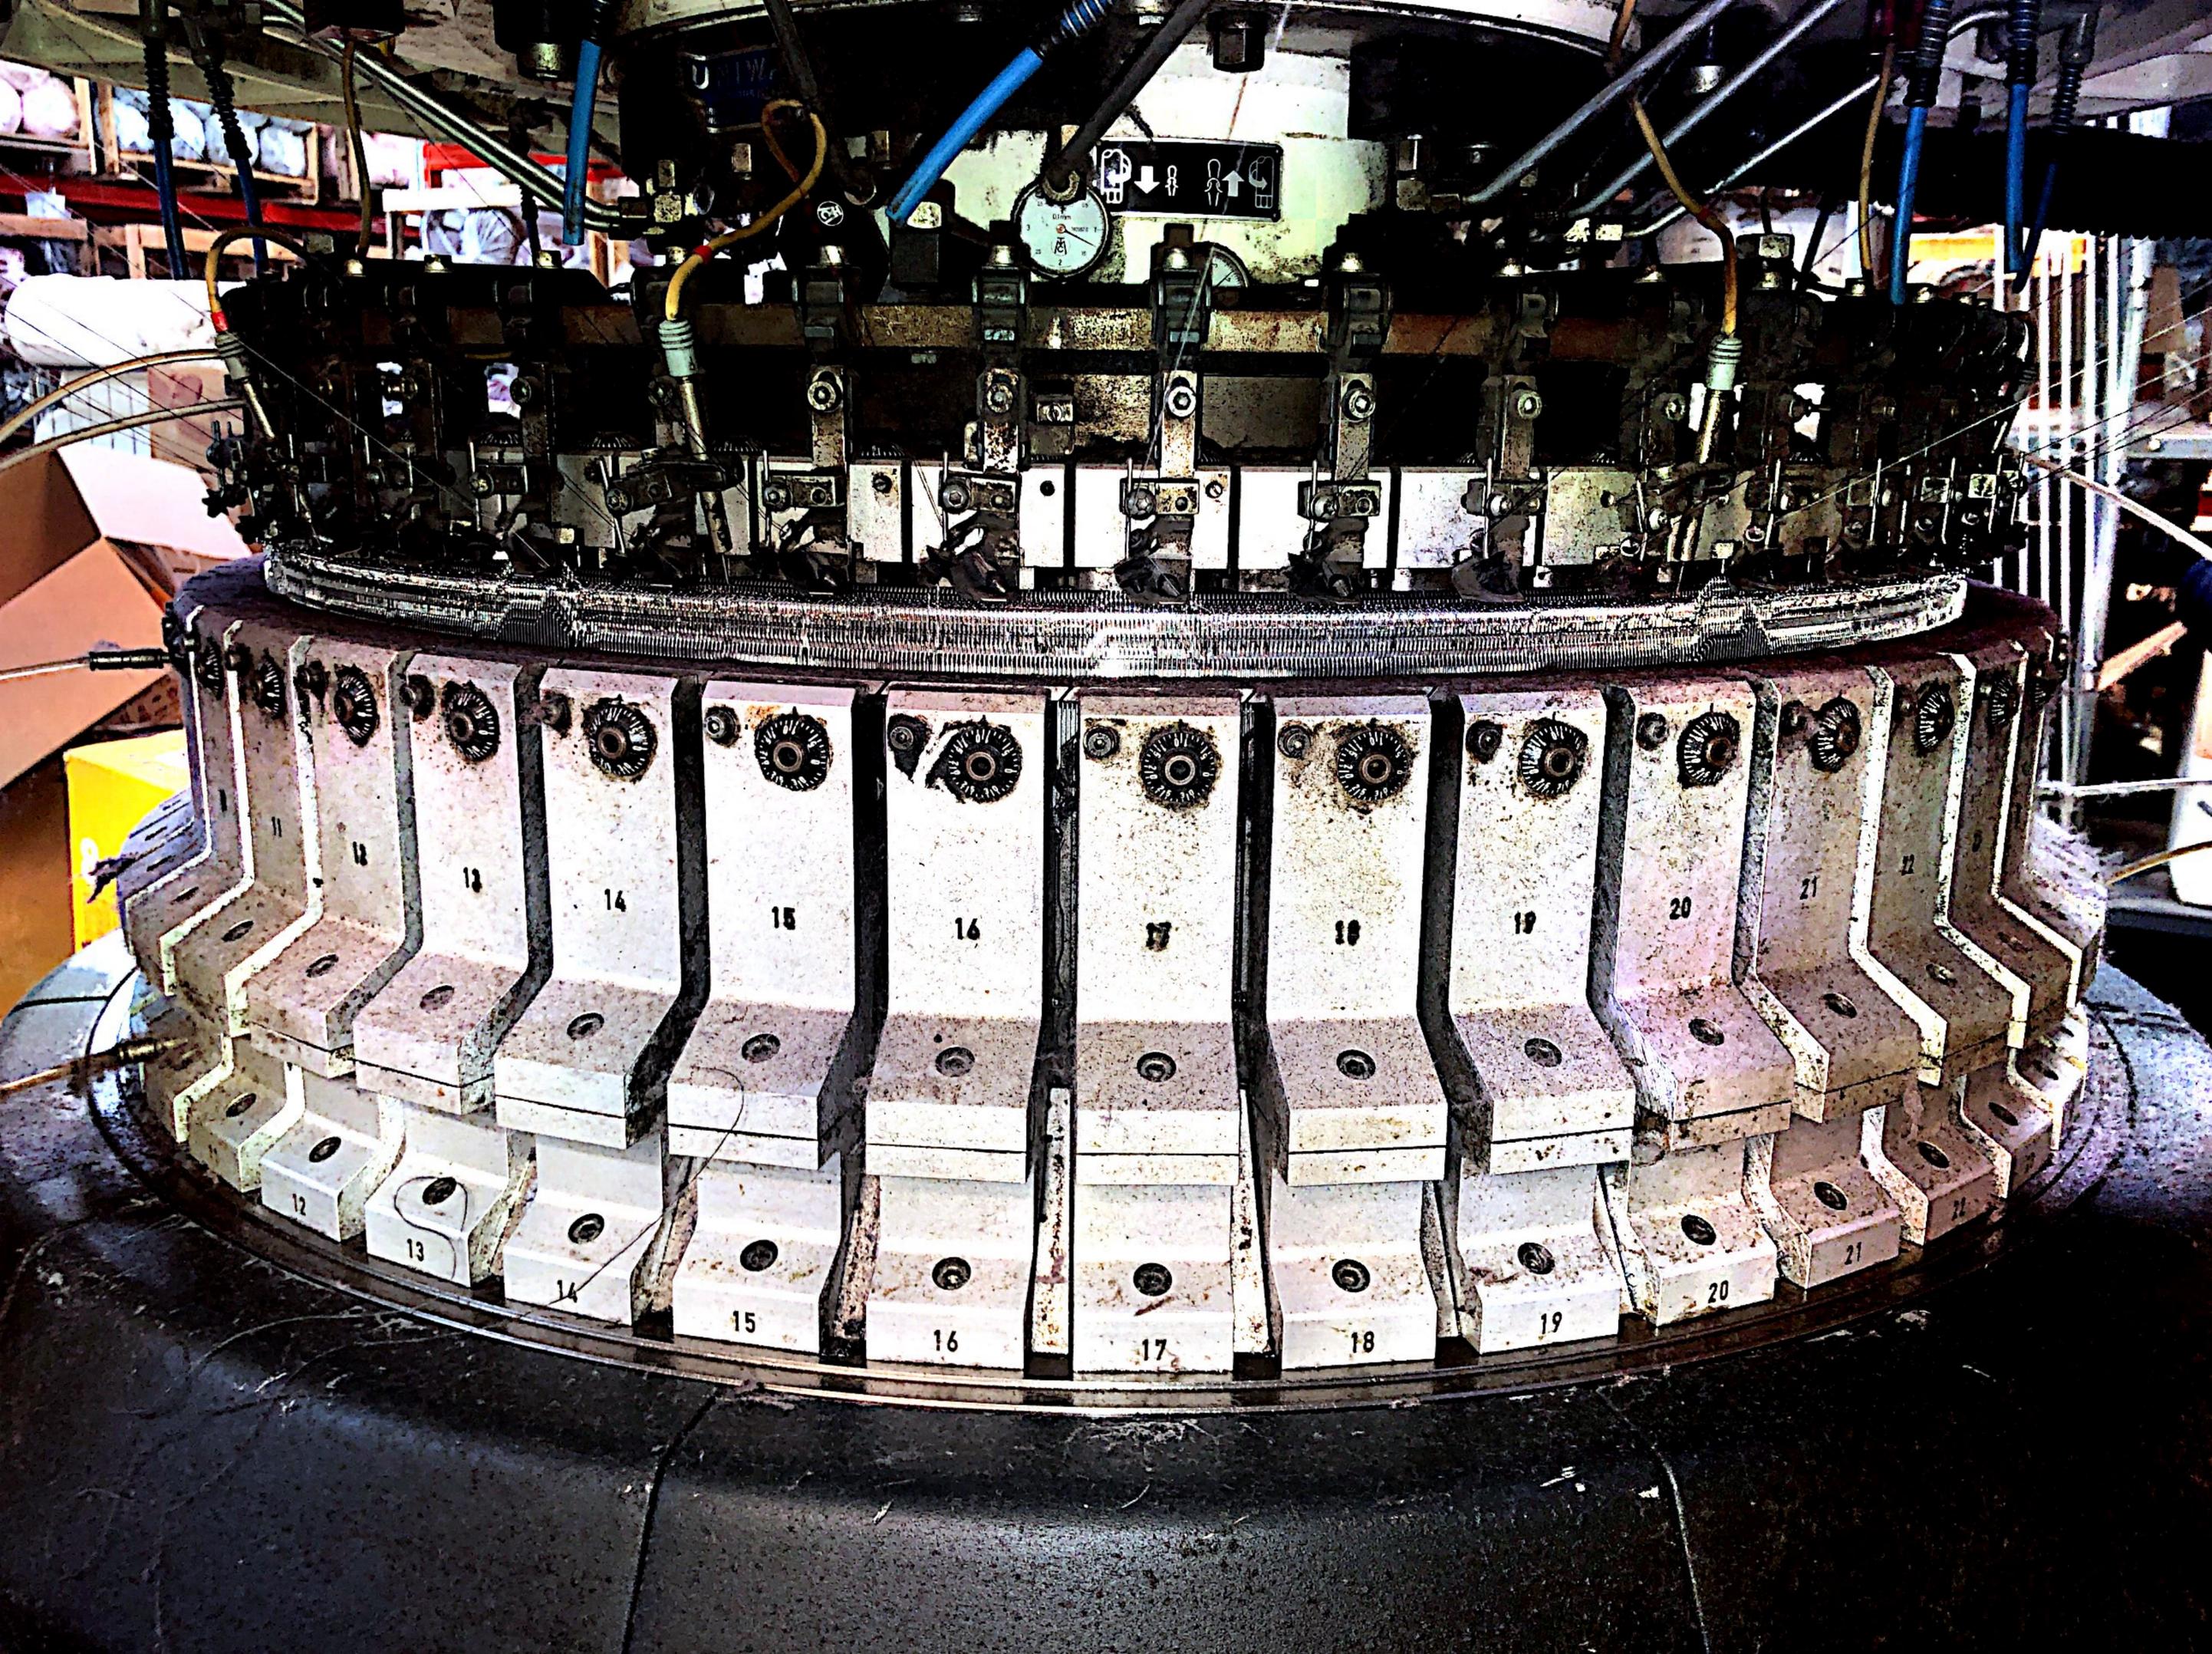

11

12

13

14

15

16

17

18

19

20

21

12

13

14

15

16


17

18

19

20

21

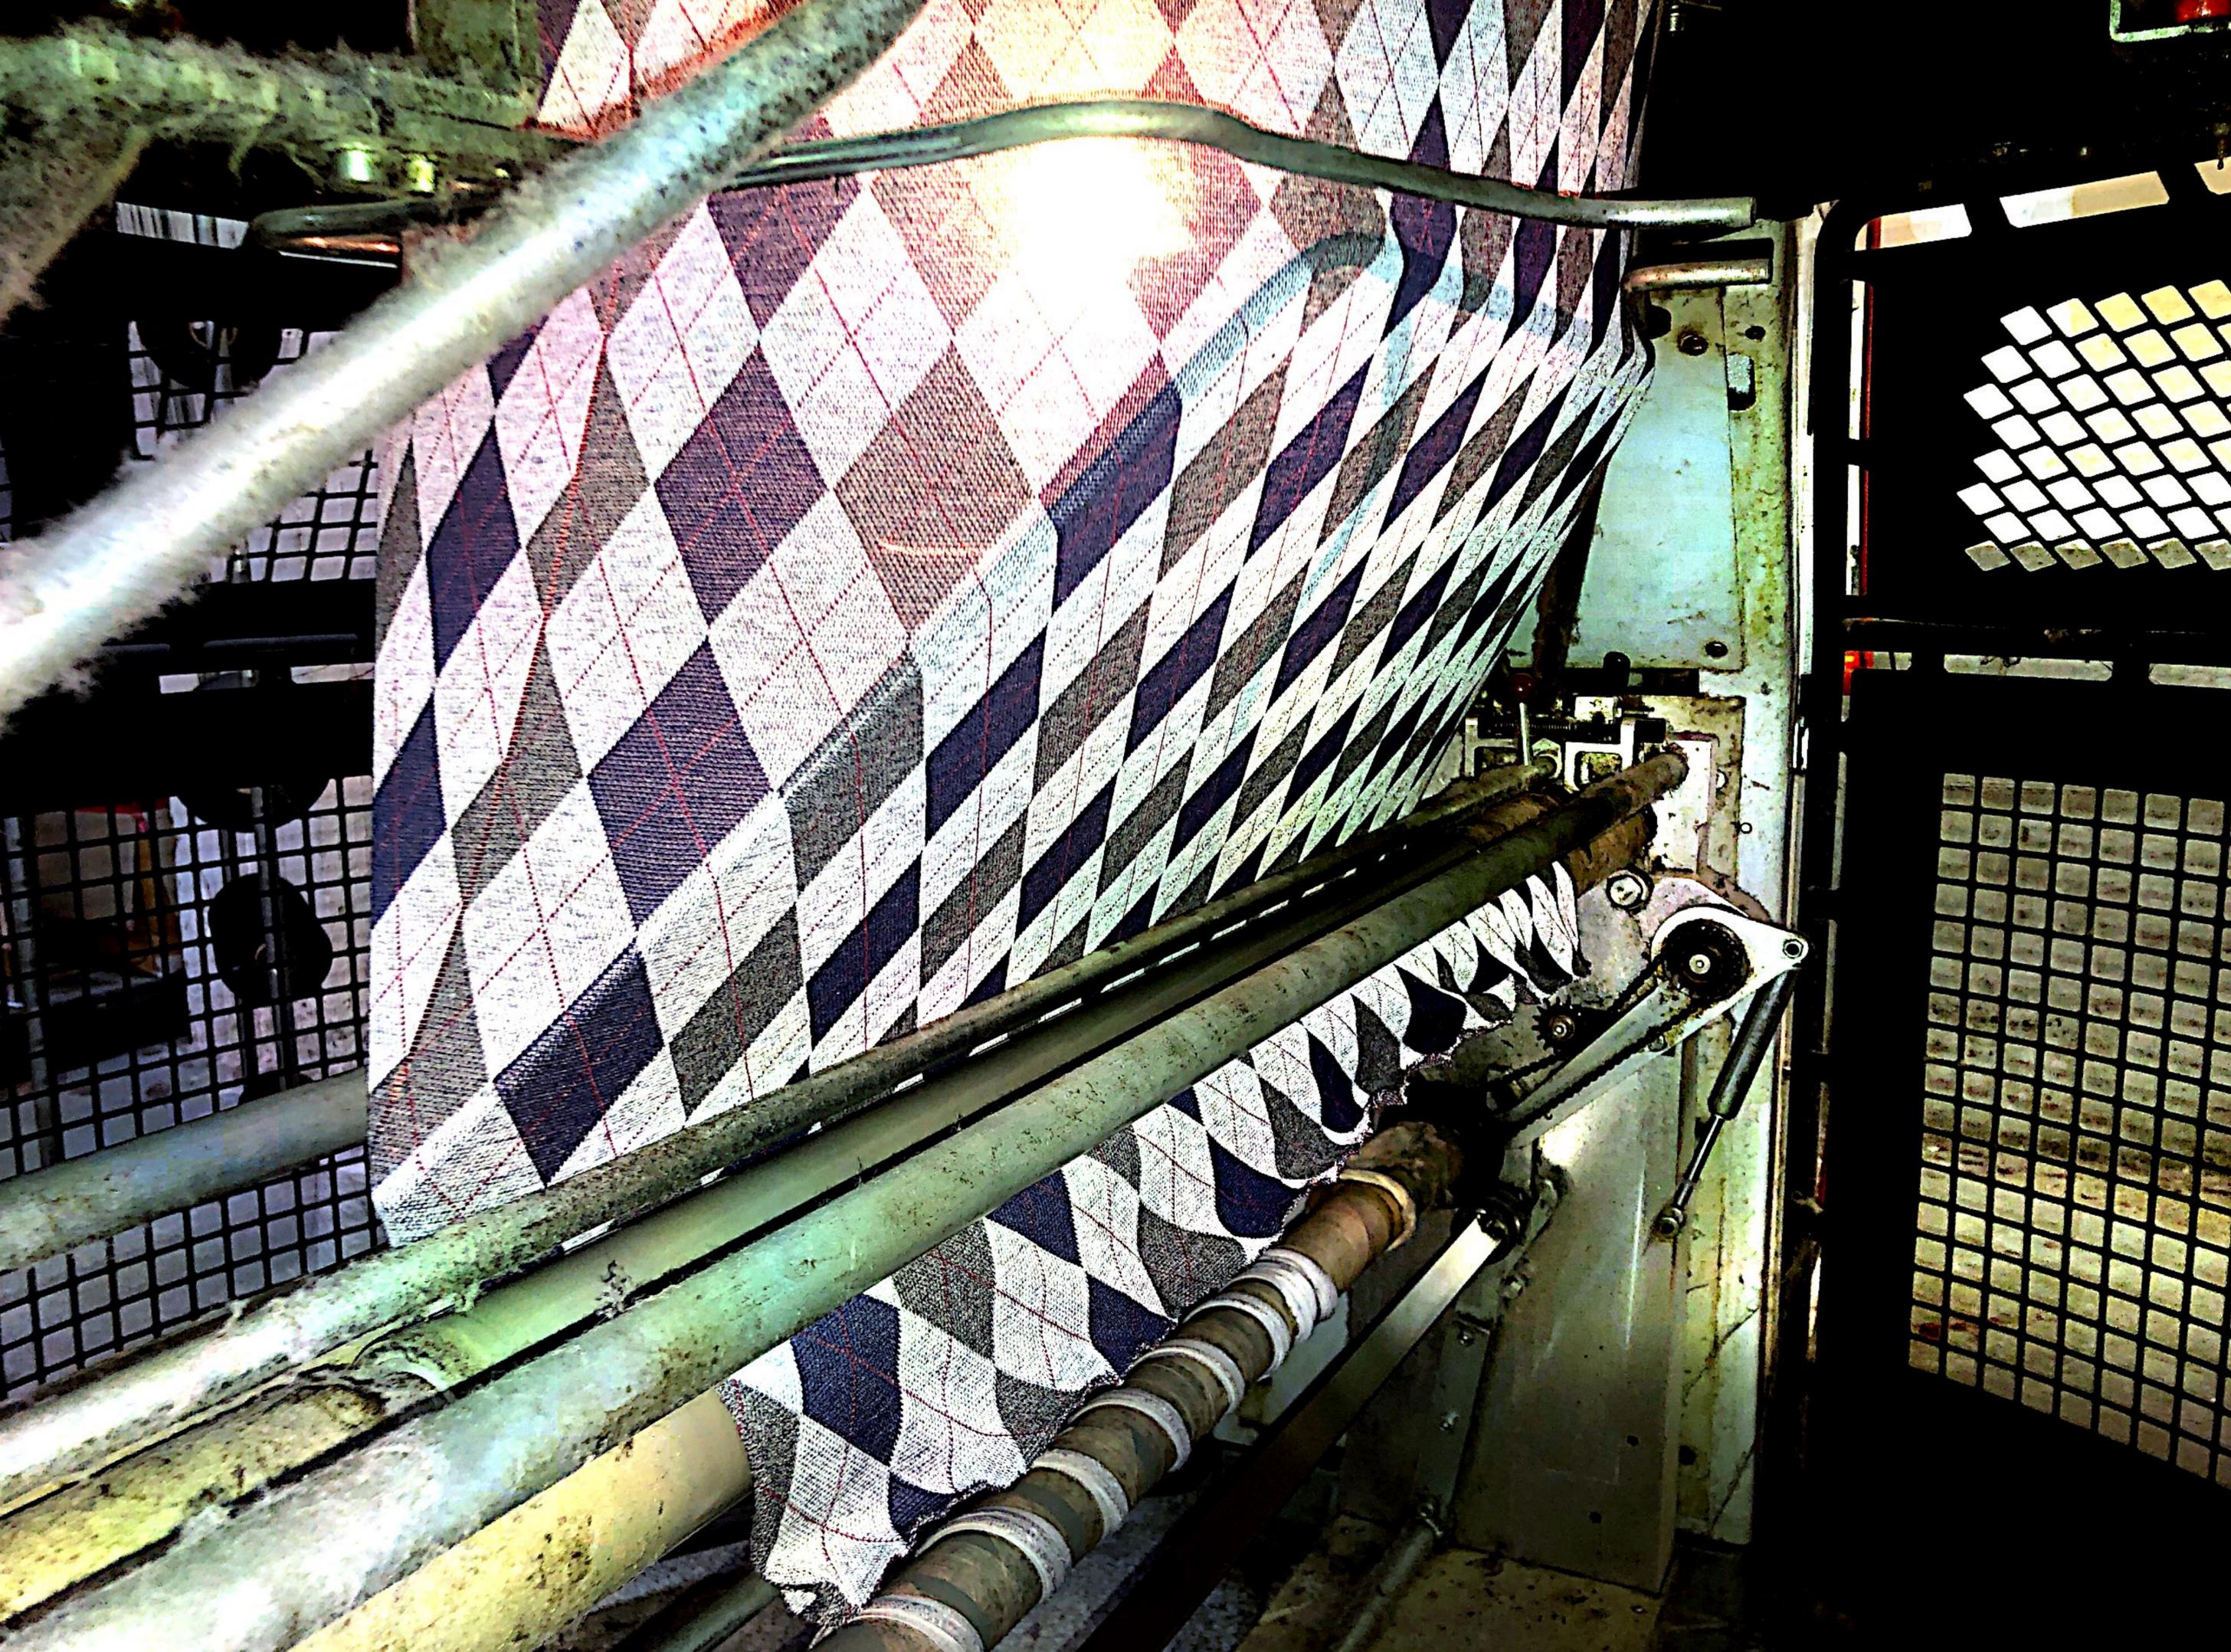

SFE



MEMBERING
D-72277


Turkey
Pakistan

28 288
134 345

Made in Sweden

Sweden
Taiwan

Other

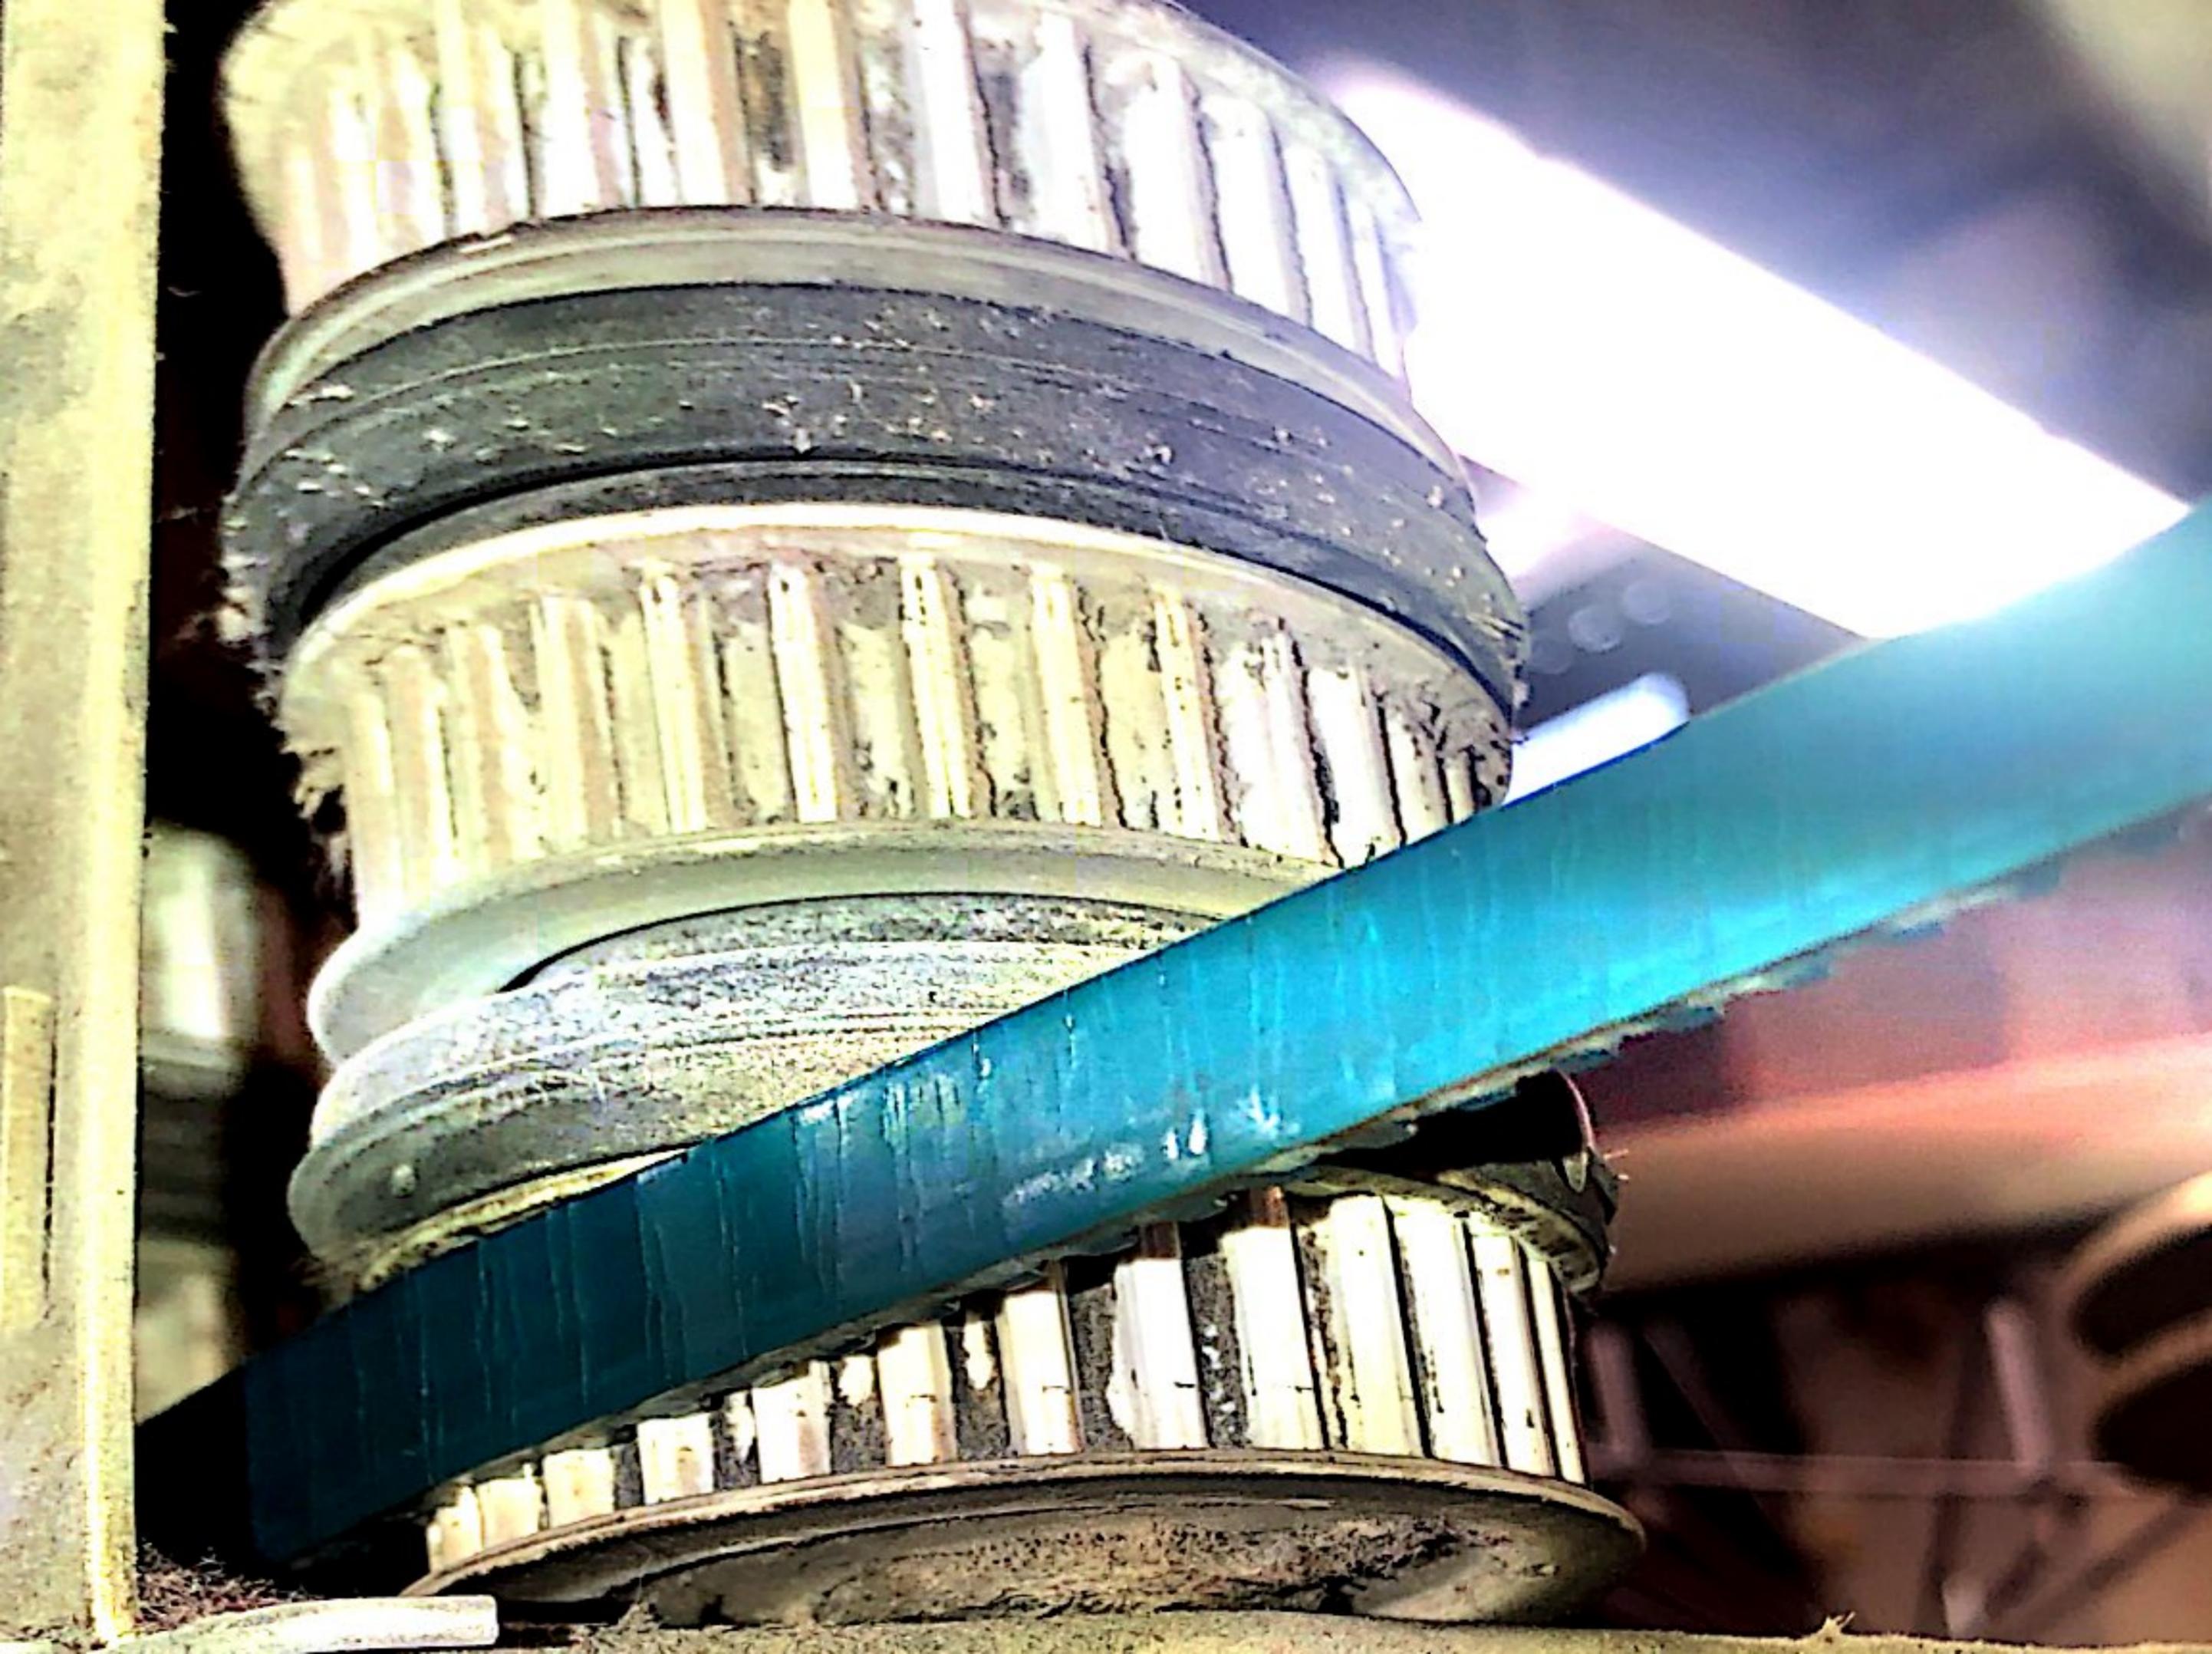



M8