


Examined and approved

Date: Signature:

(Firm stamp)

- 1 Safety fencing 1.81 m high
- 4 Door safety switch
- 5 Safety light barrier
- 6 Door safety switch with solenoid interlock
- 9 Acknowledge pushbutton

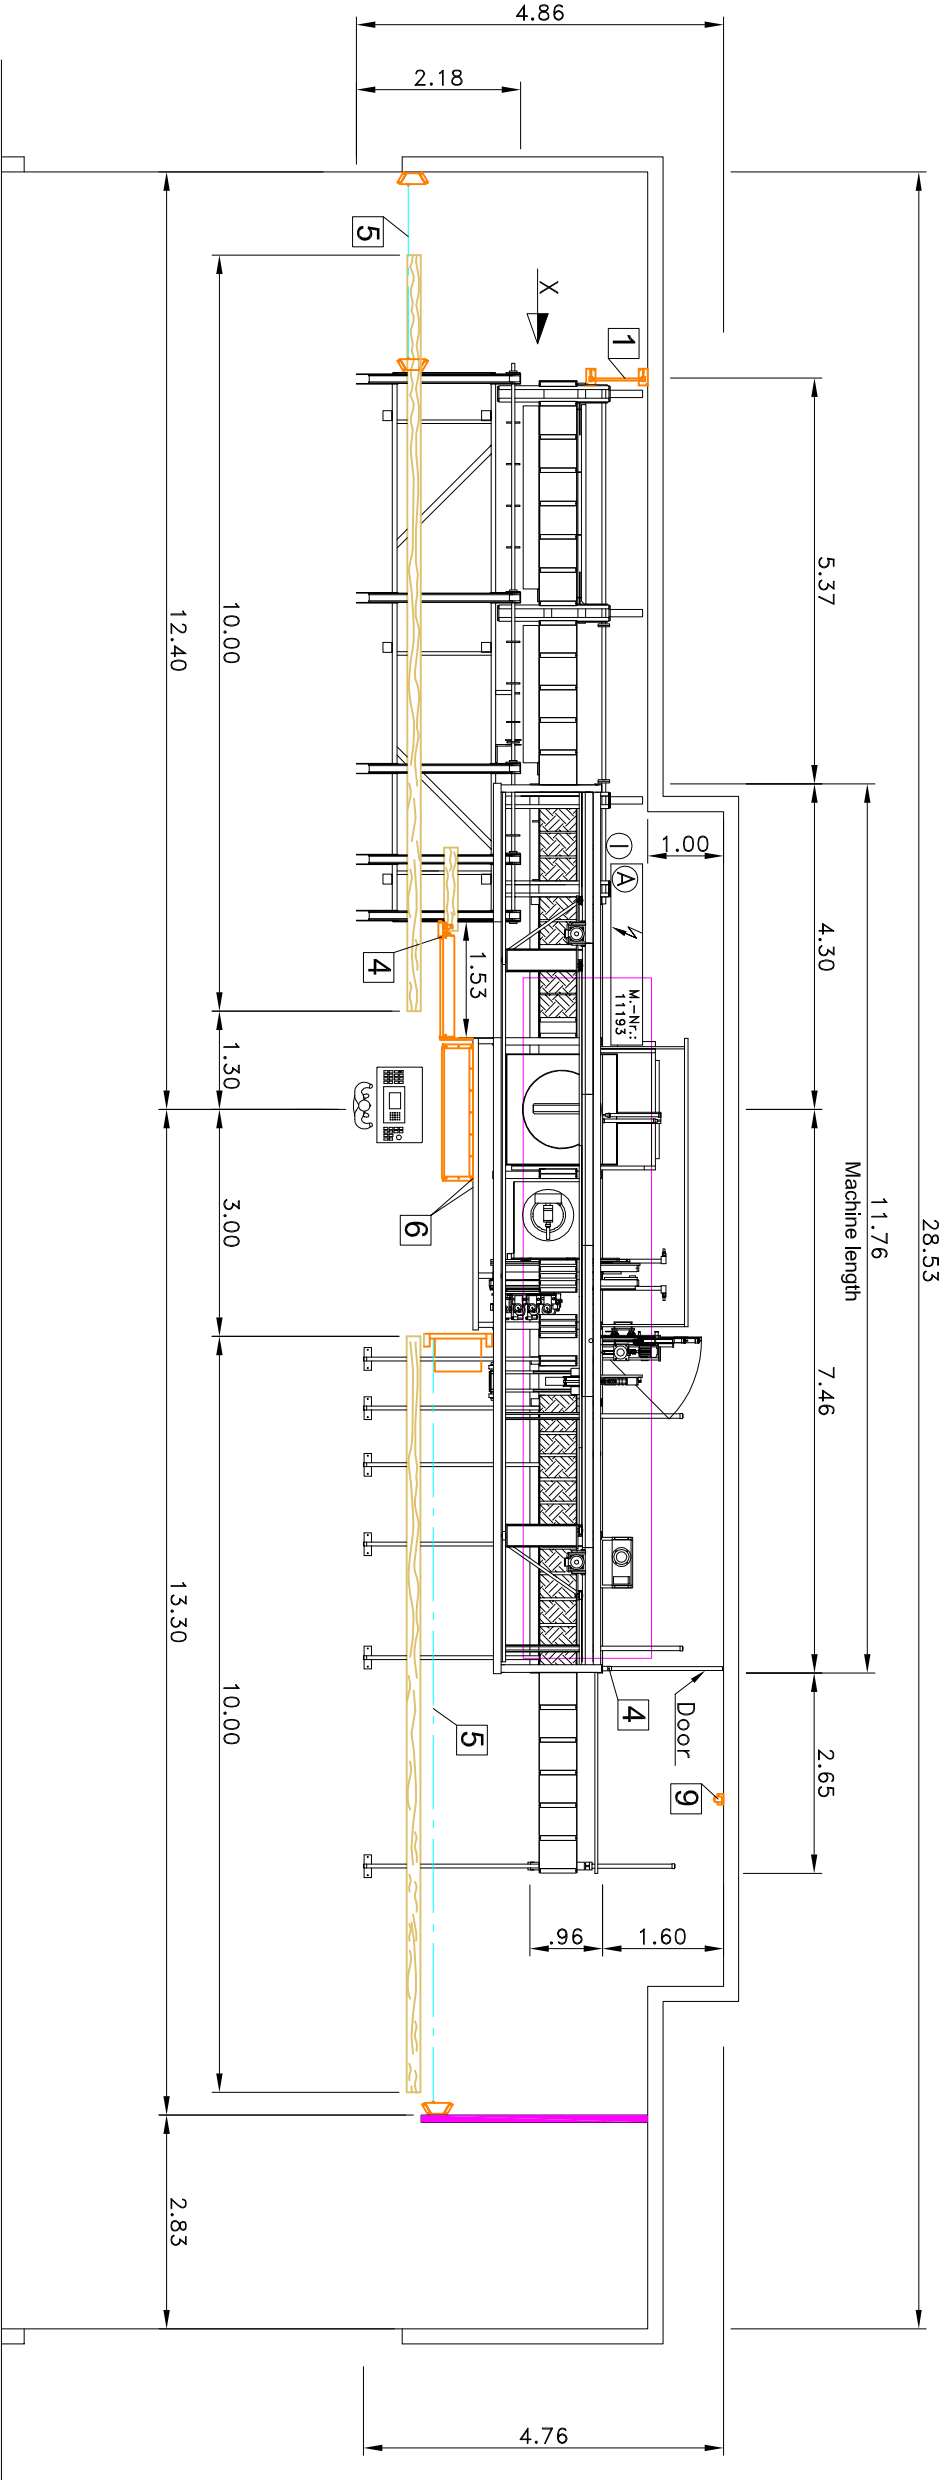

Ⓐ Electrical connection: 63A; max. 15kW
Cable length 1,3m from floor to circuit cabinet


① Pneumatic connection 1/2"; 10 bar
Useable volume at the outlet on the compressor (effective output at the connection point) must be at least 1000l/min. at an operating pressure of 9 bar.
Connection height: 1,8m from floor.

Main air supply line at least 1"

Weight of the K2: approx. 13 tons

The protection against crawling under the loading conveyor will be provided by the customer

View X
M 1:50

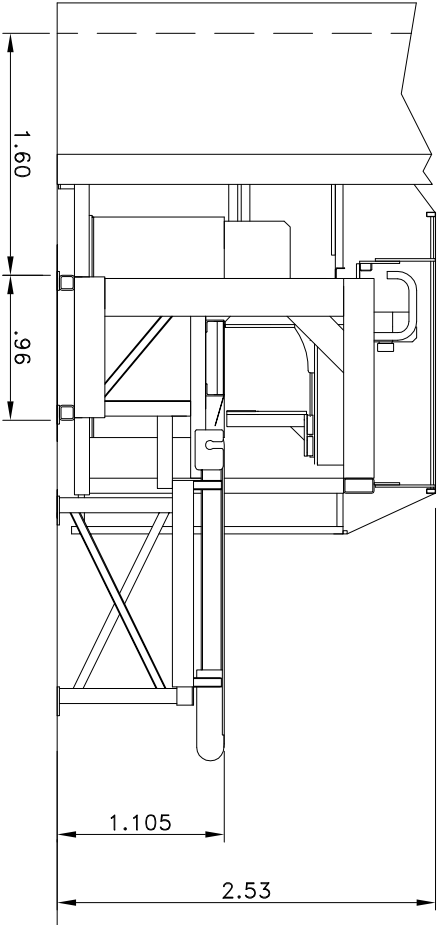

Urheberrechte				Yardstick 1:100	Revision: 22.07.19
An dieser Zeichnung beanspruchen wir Eigentum und Urheberrechte. Sie ist gegen zu halten und darf ohne unsere schriftliche Genehmigung weder vervielfältigt noch dritten Personen oder Konkurrenzfirmen zugänglich gemacht werden.				Customer: Fa. TALG	
	Date	Editor		Joinery Machine K2	
Bearb.	16.07.19	MEILLER			
Gepr.					
Allgemein-toleranz ISO 2768-mL Tolerierung ISO 8015				Layout number: KU-ABM-100-2172-200 01	
				Blatt 1/1	
				A3	