


The program


Overview of data and specifications



SHB 40 - 55

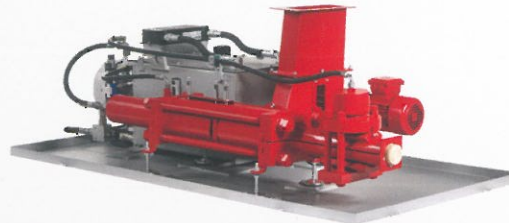

SHB RS 55 - 70

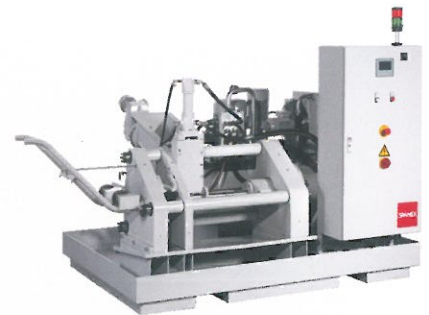

SHB HPM 45 - 120



SHB 60 - 125



SHB 150 - 250

series	unit	SHB 40 - 55	SHB RS 55 - 70	SHB 60 - 250	SHB HPM 45 - 120
briquette form	mm	120 x 45	Ø 70	125 x 70 **	Ø 45 - 120
output*	kg/h	40 - 70	50 - 90	60 - 250	40 - 2.500
throughput*	m³/h	0,2 - 0,5	0,3 - 0,7	0,5 - 2,0	0,3 - 6,0
motor capacity	kW	4 - 5,5	4 - 5,5	5,5 - 11	7,5 - 55
dimensions l x w x h	m	1,6 x 1,0 x 0,7	1,6 x 1,5 x 0,7	1,5 x 1,5 x 0,7 to 1,7 x 2,4 x 1,5	1,5 x 1,8 x 1,6 to 2,2 x 2,7 x 2,7
weight***	t	0,55 - 0,65	0,50 - 0,60	0,7 - 1,5	2,2 - 9,0

* depending on the material (bulk density, structure, etc.); ** 8-sided; *** without oil

Design configurations:

SHB 40 - 55, RS 55 - 70 and 60 - 250 series

- increased pressing chamber
- extended pressing pliers
- reinforced clamping cylinder
- replaceable wear and tear protection
- pre-heater for hydraulic oil
- electronic briquette length control

Design configurations:

SHB HPM series

- material preparation
- conveyor technology
- oil spraying system
- replaceable wear and tear protection
- pre-heater for hydraulic oil
- emulsion pump