Saturn S6

Automatic rotary ring stretch wrapper

		D17	D20	D23	D26	D29
CAPACITY	Maximum capacity (p/h)	120	110	90	85	75
MACHINERY DIMENSIONS	A (mm)	7000		8500	10000	
	B (mm)	2000		2500	3000	
	C(mm)	3000		3500	4000	
	D (mm)	2000		2500	3000	
	E (mm)	3600	3800	4660	4790	5000
	F (mm)	4200 *				
	G (mm)	2600 *				
	H (mm)	2300	2500	3230	3540	
LOAD DIMENSIONS	Maximum width (mm)	1100	1300	1500	1600	1800
	Maximum diagonal (mm)	1750	2050	2300	2600	2900
	Maximum height (mm)	2100 (conveyor height 500 mm) *				
POWER SUPPLY	Voltage	400 V 3P + PE 50 Hz				
	Compressed air (bar)	6				
STRETCH FILM	Maximum height (mm)	500				
	Maximum diameter (mm)	250				
	Core diameter (mm)	76				
	Film thickness (µ)	10 - 35				
TOP FILM	Maximum width (mm)	1600	1800	2000		
	Maximum diameter(mm)	250				
	Core diameter (mm)	76				
	Film thickness (µ)	15 - 90				

* Possibility to adapt the frame of the machine for loads higher than 2100 mm

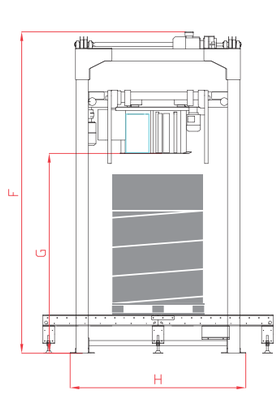

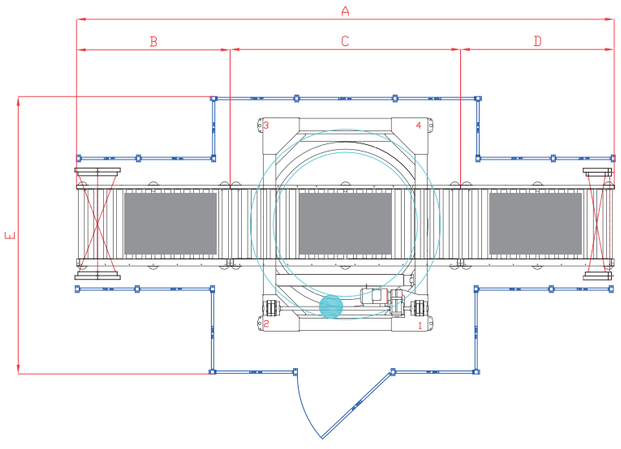

MOVITEC
A MOSCA COMPANY

www.movitec-ws.com
C. Pallars Sobirà, 16 · Pol. Industrial La Nora · 25660 · Alcoletge [Lleida] · SPAIN
Tel.[+34] 973 184 059 · Fax [+34] 973 184 008 · comercial@movitec-ws.com

Saturn S6

Automatic rotary ring stretch wrapper

HIGH CAPACITY
UP TO
120
pallets/hour

THE MOST VERSATILE

MOVITEC
A MOSCA COMPANY

we dare to try anything

MOVITEC
PALLET WRAPPING TECHNOLOGY

Reliable & efficient wrapping machines

Saturn S6

- **HIGH CAPACITY: up to 120 pallets/hour**
- Maximum quality, high performance and minimum maintenance
- It's the most versatile: it can evolve to a Saturn S8 model to get higher capacities
- The load remains static: the film reels rotate around the load
- Guaranteed savings of stretch film: 300% film pre-stretching, or up to 400% with EPS
  1 m of film becomes 4 m
- Finishing without tails of film thanks to our efficient cut and welding device
- Electronic and self-adjusting tension control depending on the profile of the load
- Possibility of applying efficient dustproof and rainproof wrappings
- Possibility of wrapping at ground level
- Capable of applying bands at any height of the load

Standard equipment

Touch panel

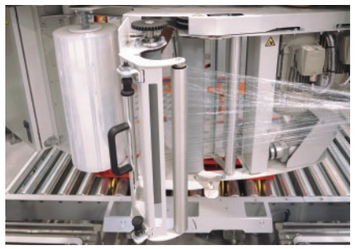

Quick-Load

Add-ons

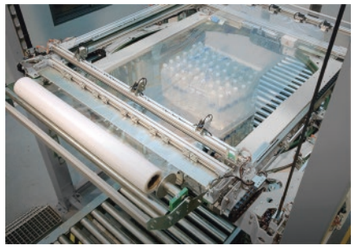

Top Cover: Dustproof and Rainproof

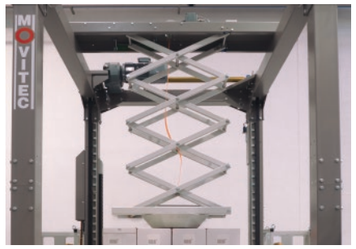

Motorized hold down plate

Roping device

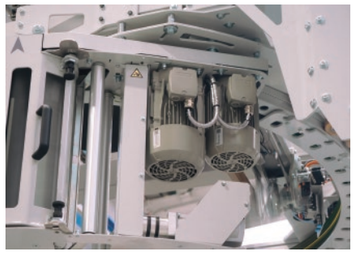

EPS: Electronic pre-stretch

ARC: Automatic Reel Change

ACBA: Automatic Corner Board Application