


The logic using which the MCU processes the parameter values is summarised by the diagram, where the value of the parameter T\_MIN (minimum retention time) is considered for example purposes

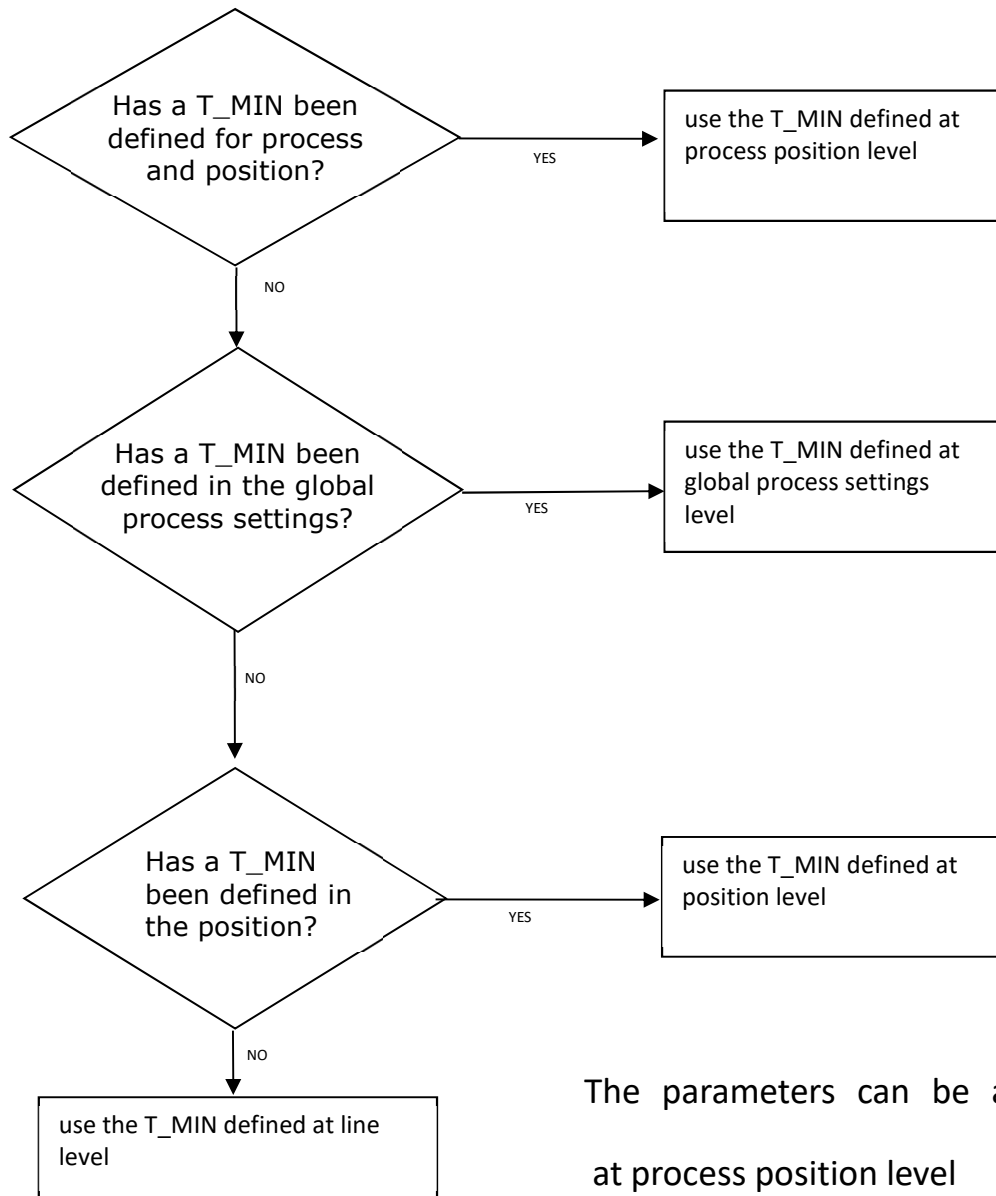

The parameters can be assigned:

- at process position level
- at a global process settings level
- at position level (for all processes)
- at line level (for all positions and all processes)