


Basic equipment

- Copilot system with touch screen
 - Choice of production mode
 - Job memory
 - Automatic format setting
 - Precision adjustment via +/- keys during production
 - Indication of machine and material flow malfunctions
 - Operator guided malfunction rectification
- Copilot set up of the machine fully automatic and without tools
 - Automatic adjustment of the cross cutting knife
 - Automatic adjustment of the line cut knives
 - Fully automatic adjustment of the pneumatic adjustable creasing and slotting tools
- 2 manual crease wheels for multiple creasing
- Process single and double corrugated board
- More than 50 different FEFCO box styles available
- Servo-controlled drive technology

Format data	min	max
Sheet width	120 mm	1950 mm
Blank length	500 mm	8000 mm
Blank material	Corrugated board Single and double flutes	
Material thickness	1 mm	10 mm
Slotting length	200 mm	500 mm
Slotting distance	100 mm	

Technical data

BX 200 dimensions	Length 1770 mm Width 2830 mm Height 1800 mm
Weight of the Boxer	2000 kg

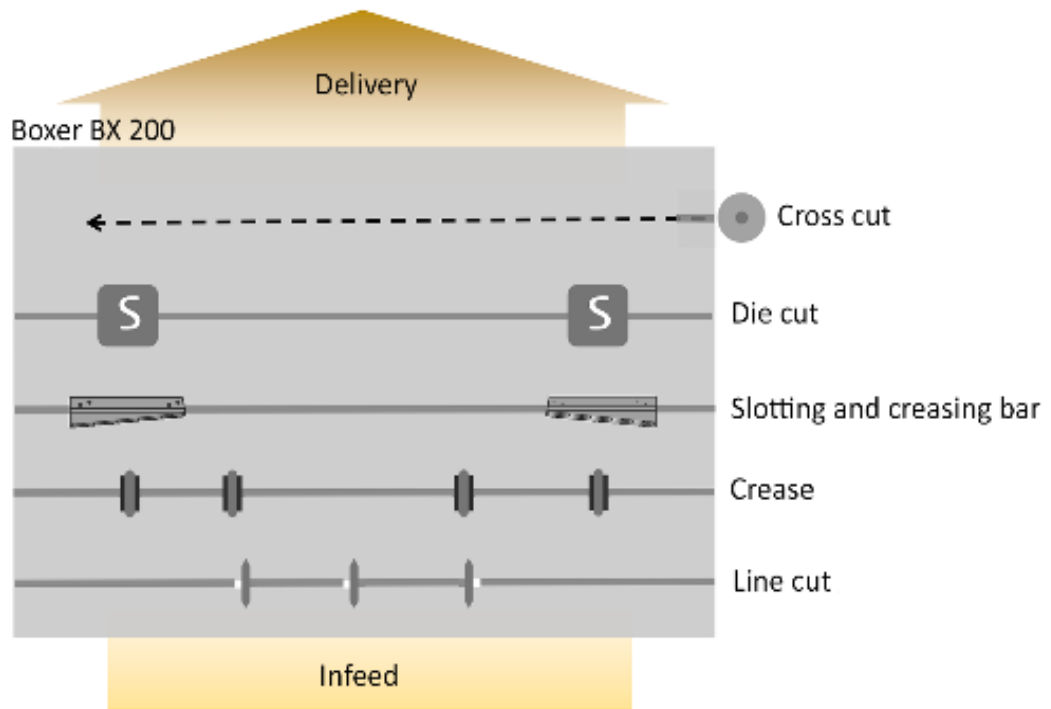

Mechanical speed: up to 80 m/min

Net performance depends on material, format, ...

To be provided by the customer

Compressed air requirement 20 Nm³/h

Compressed air supply 6 bar

Electrical equipment 3 phases, 400 Volt / N / PE, 50 Hz

Table-Feed, type TF 200

Table-Feed for feeding stacks of corrugated board

– inclusive Trolley to support the feeding of corrugated board

