

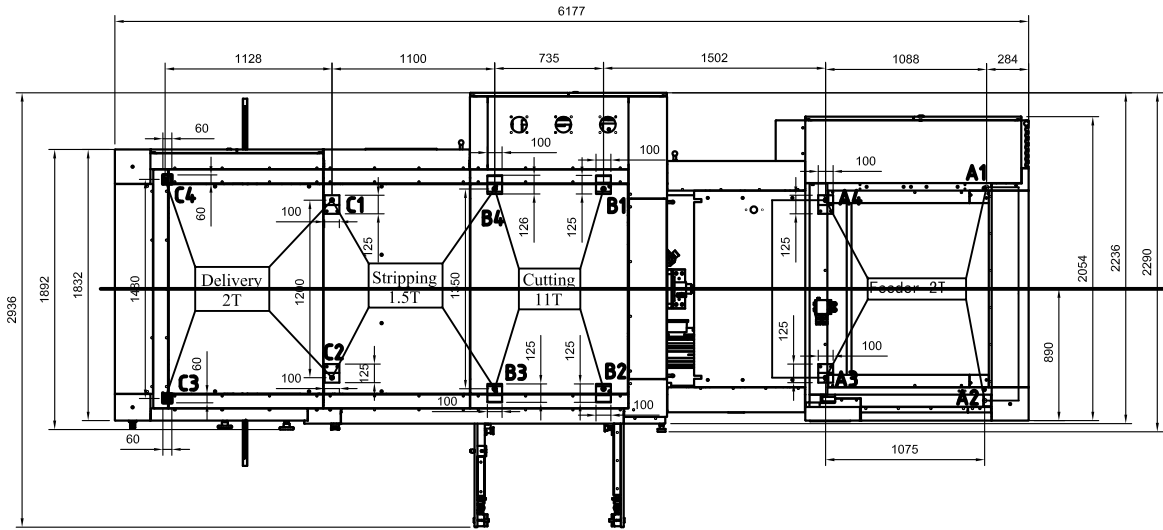


Net 16.5T	
Pile incl 17.7T	
Static load	
Point	Load(KN)
A1	9.4
A2	9.4
A3	9.4
A4	9.4
B1	32.3
B2	32.3
B3	32.3
B4	32.3
C1	13.5
C2	13.5
C3	13.5
C4	13.5
Dynamic Factor1.2	

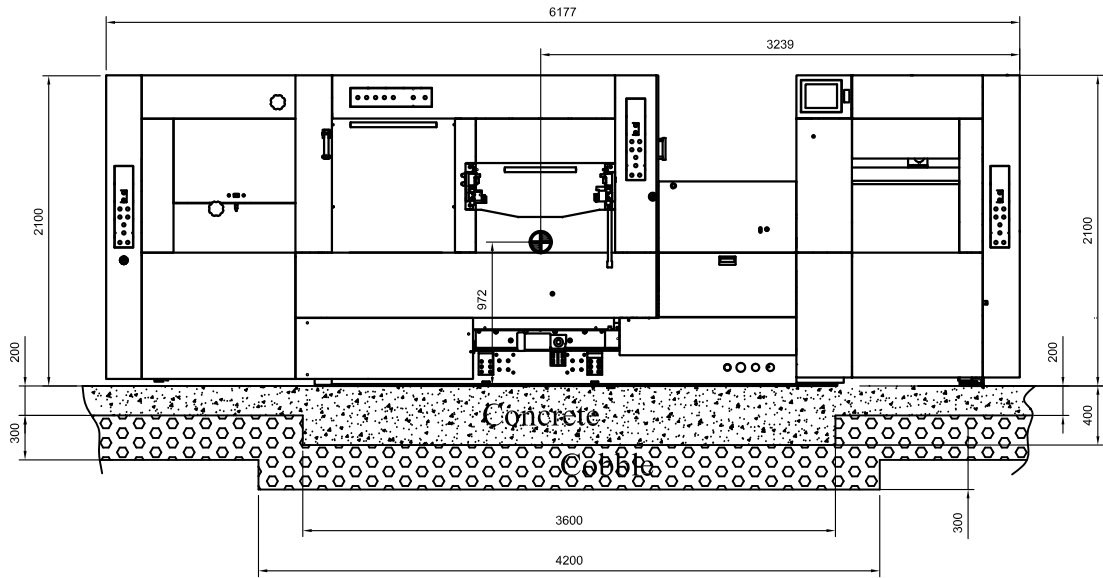

Centerline

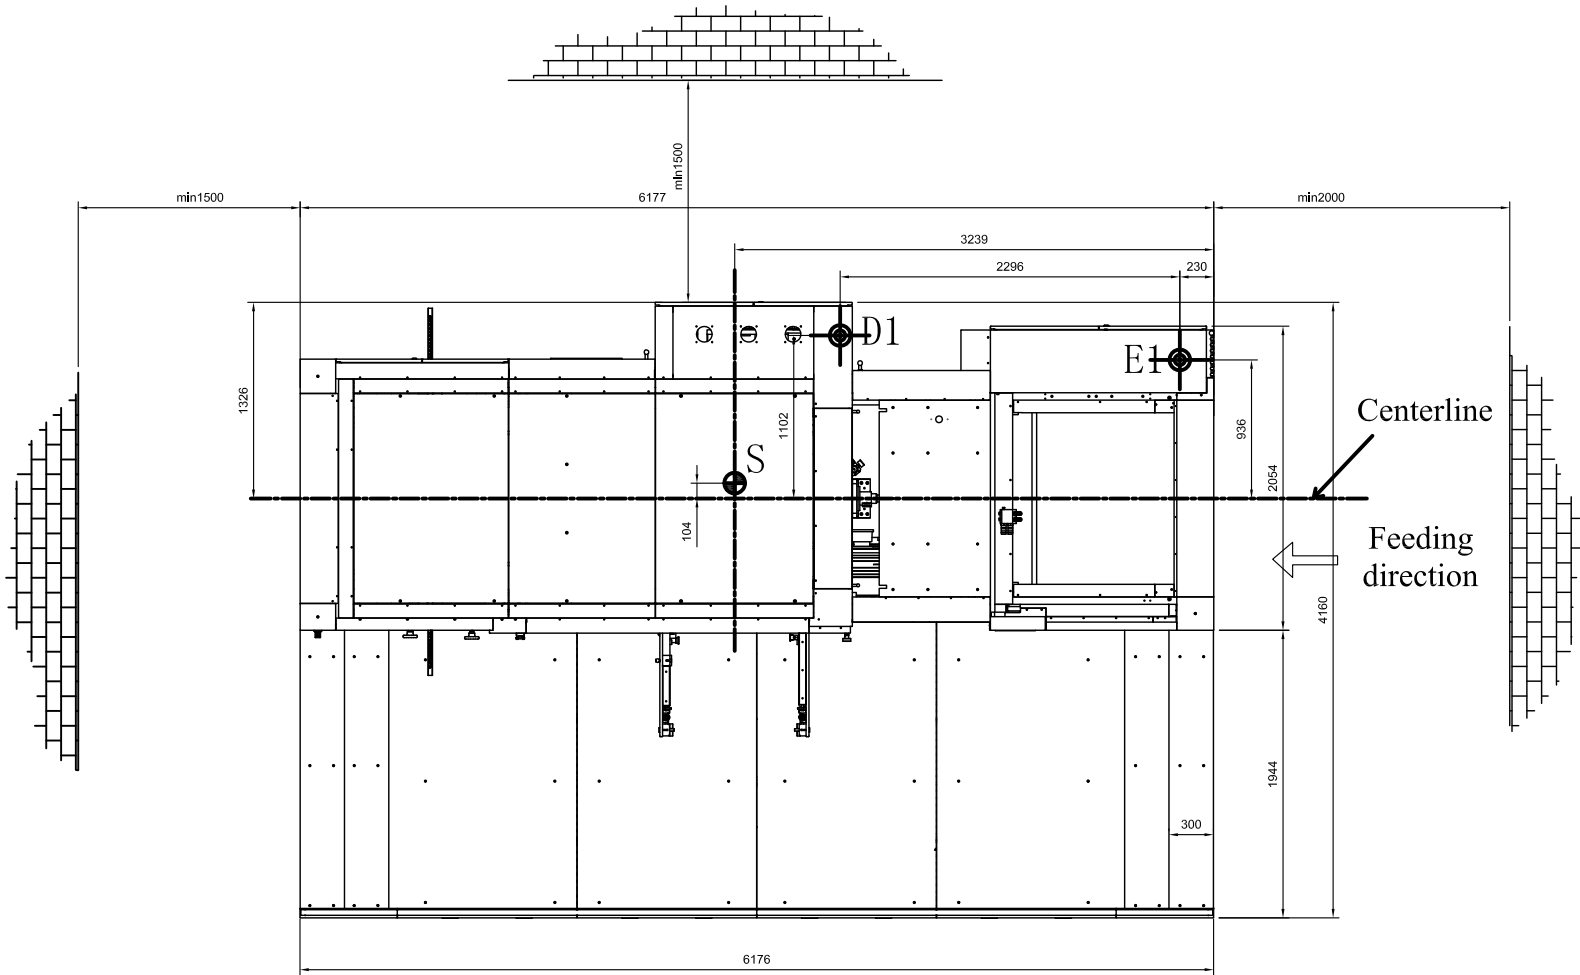

Technical Requirement

- 1、Ground Flatness $\leq \pm 4\text{mm}/2000\text{mm}$.
- 2、The construction of the foundation depends on local conditions.
Natural frequency of the foundation incl. weight of machine $> 25\text{ Hz}$
- 3、S is the center of gravity
- 4、D1 is main air supply: flow $\geq 0.37\text{m}^3/\text{min}$, pressures $\geq 0.6\text{MPa}$.
- 5、E1 is main power supply: 400VAC, 50/60Hz, 16.9kw

长荣股份 MASTERWORK		天津长荣科技集团股份有限公司	
设计		Easy matrix 106CS	
审核		Floor plan (standard)	
制图		图样标注 重量 (kg) / 材料重量 (kg)	
校对		第 1 版	
批准		Easy matrix 106CS	
		图样标注 重量 (kg) / 材料重量 (kg)	
		第 1 版	
		图样标注 重量 (kg) / 材料重量 (kg)	
		第 1 版	