

HOEFLON®

C30eL



Hoeflon. Good job.


Why the Hoeflon C30eL?

- Maximum reach and flexibility at height
- Get more work done from a single position
- Unmatched mobility in its class

Specifications

Capacity	7000 kg
Dimensions L x W x H	5,4 x 1,2 x 2,3 m
Lifting height incl. options	30,5 m
Lifting height excl. options	21,5 m
Horizontal reach incl. options	29,5 m
Horizontal reach excl. options	19,3 m
Total weight excl. options	6400 kg
Total weight incl. options	8895 kg
Pick & carry	3000 kg


Dimensions

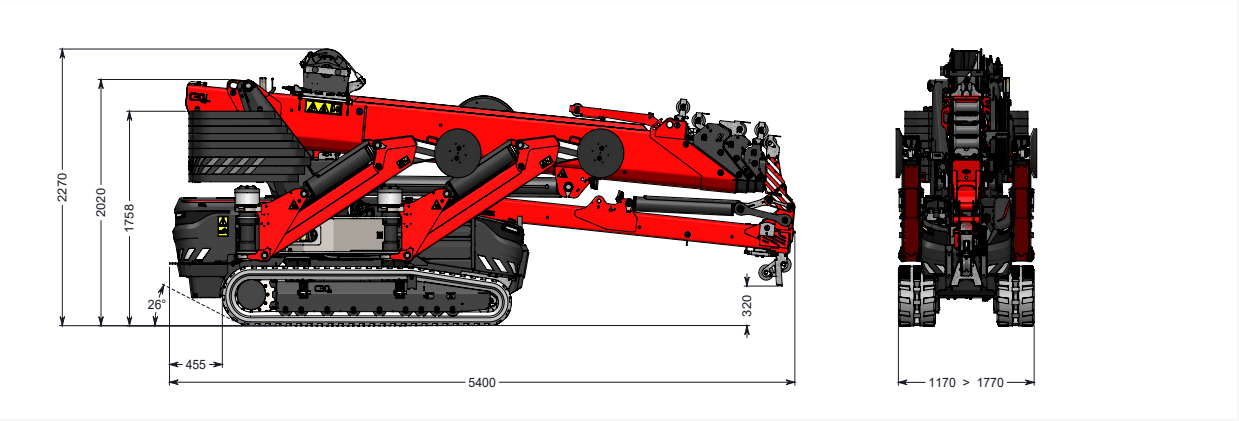


Technical specifications

Load charts


Main boom

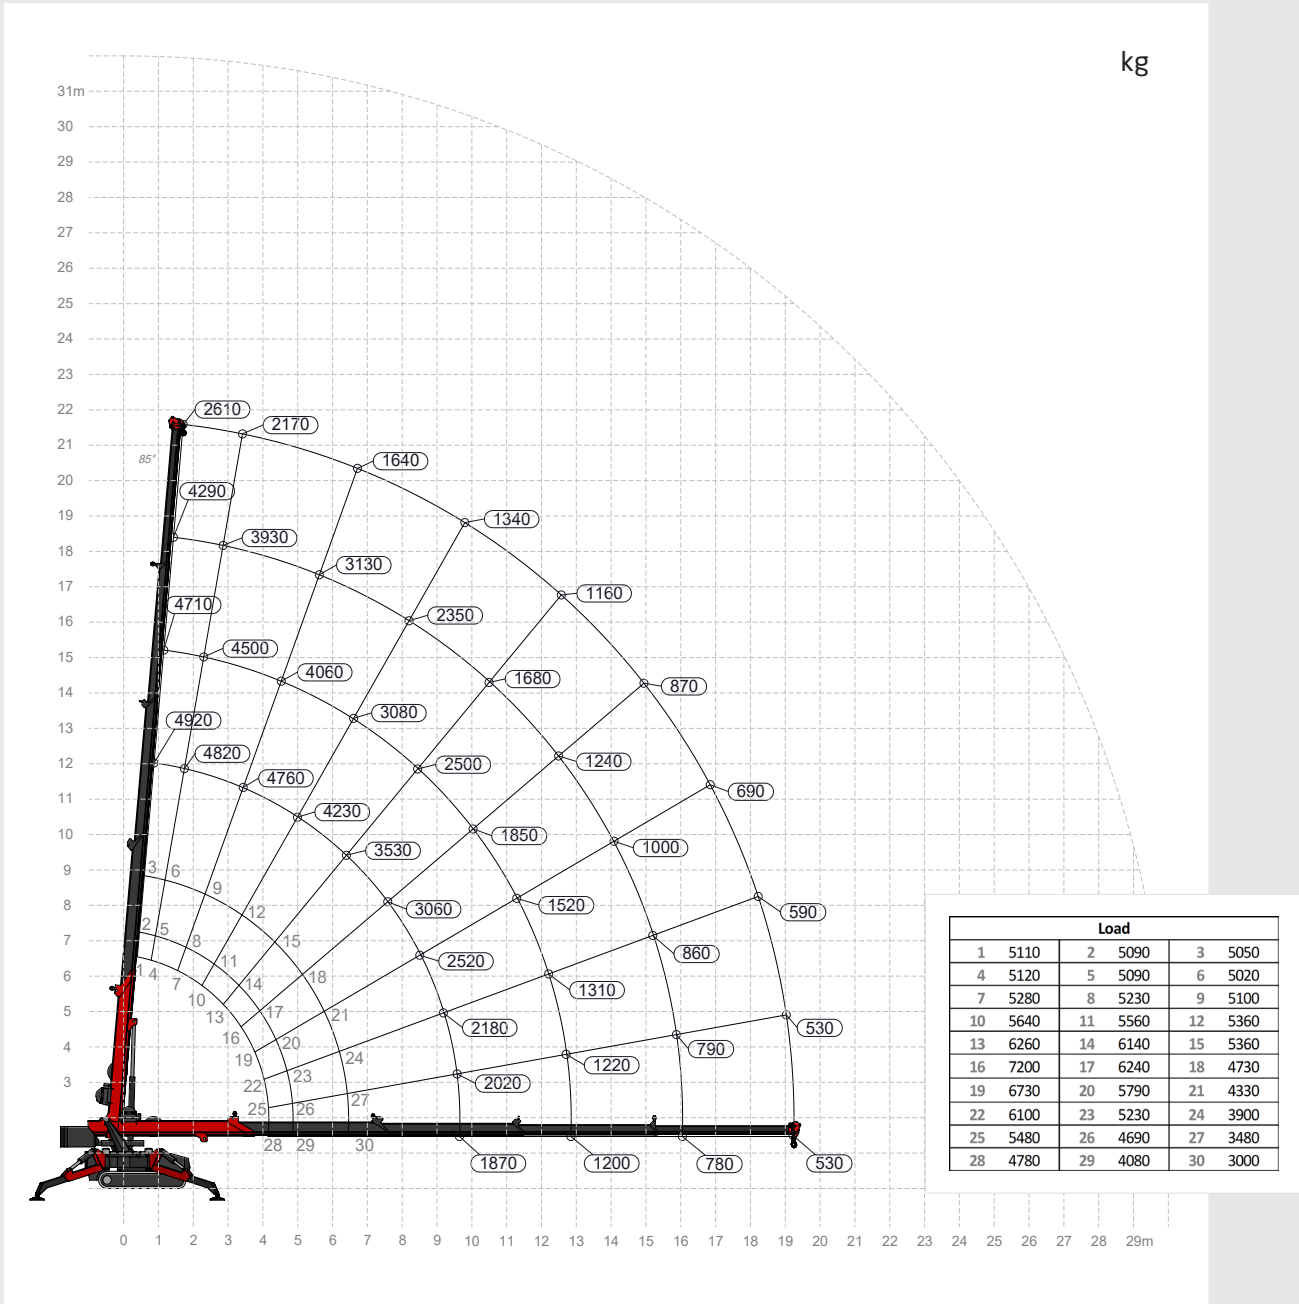


Standard with jib

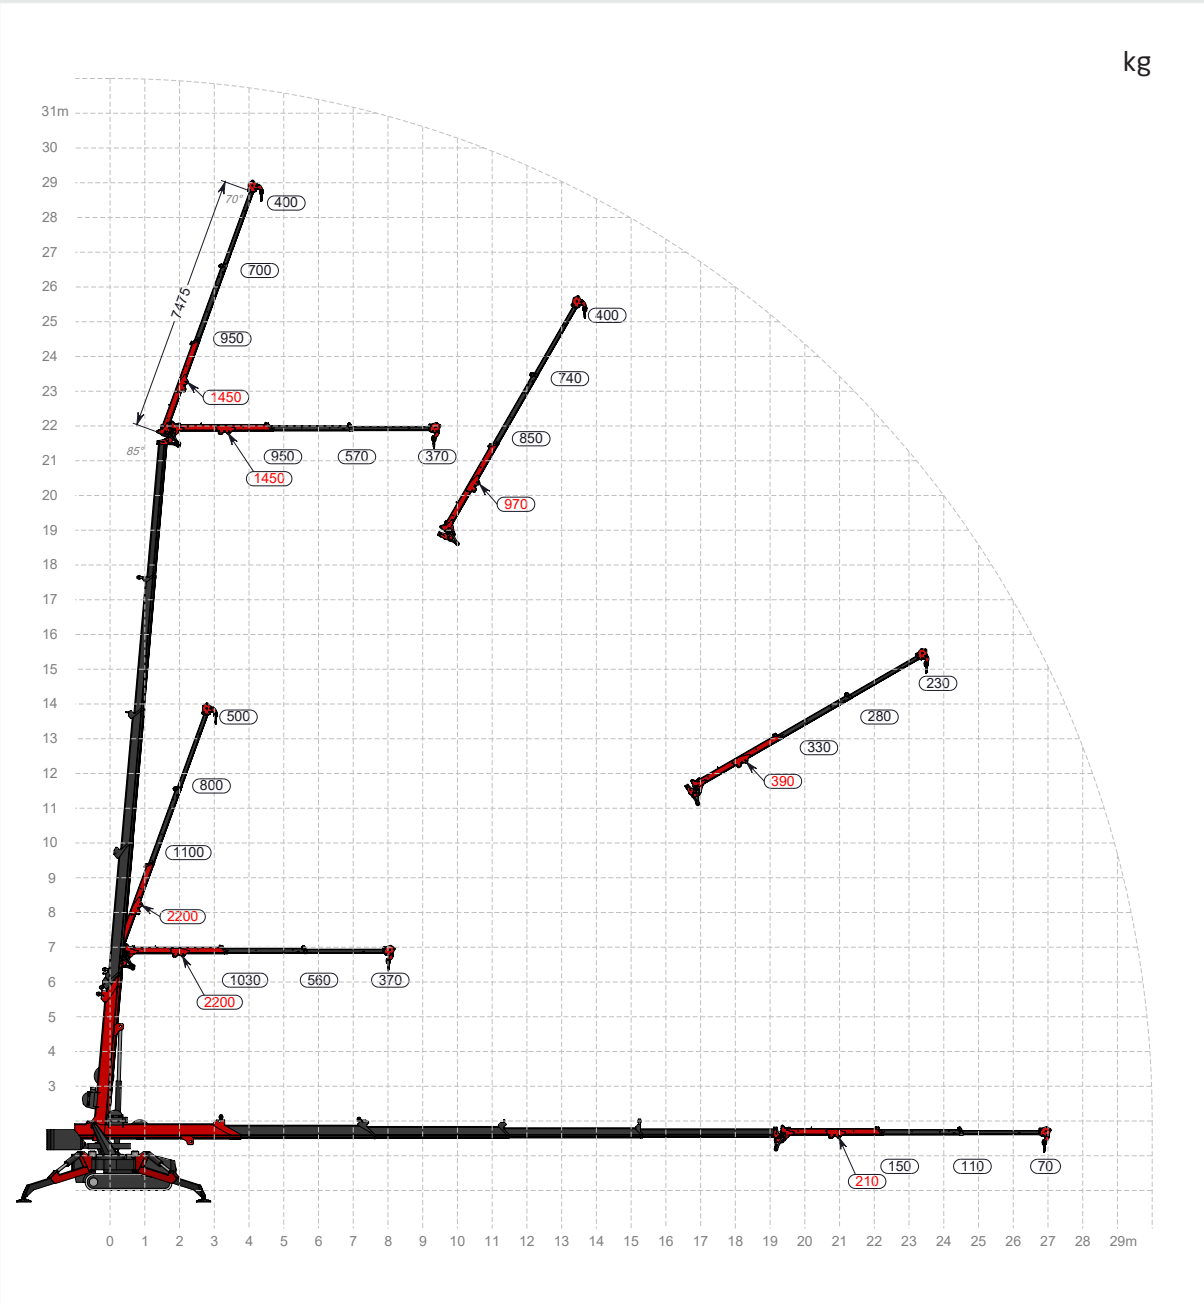

Standard with jib + manual jib extension

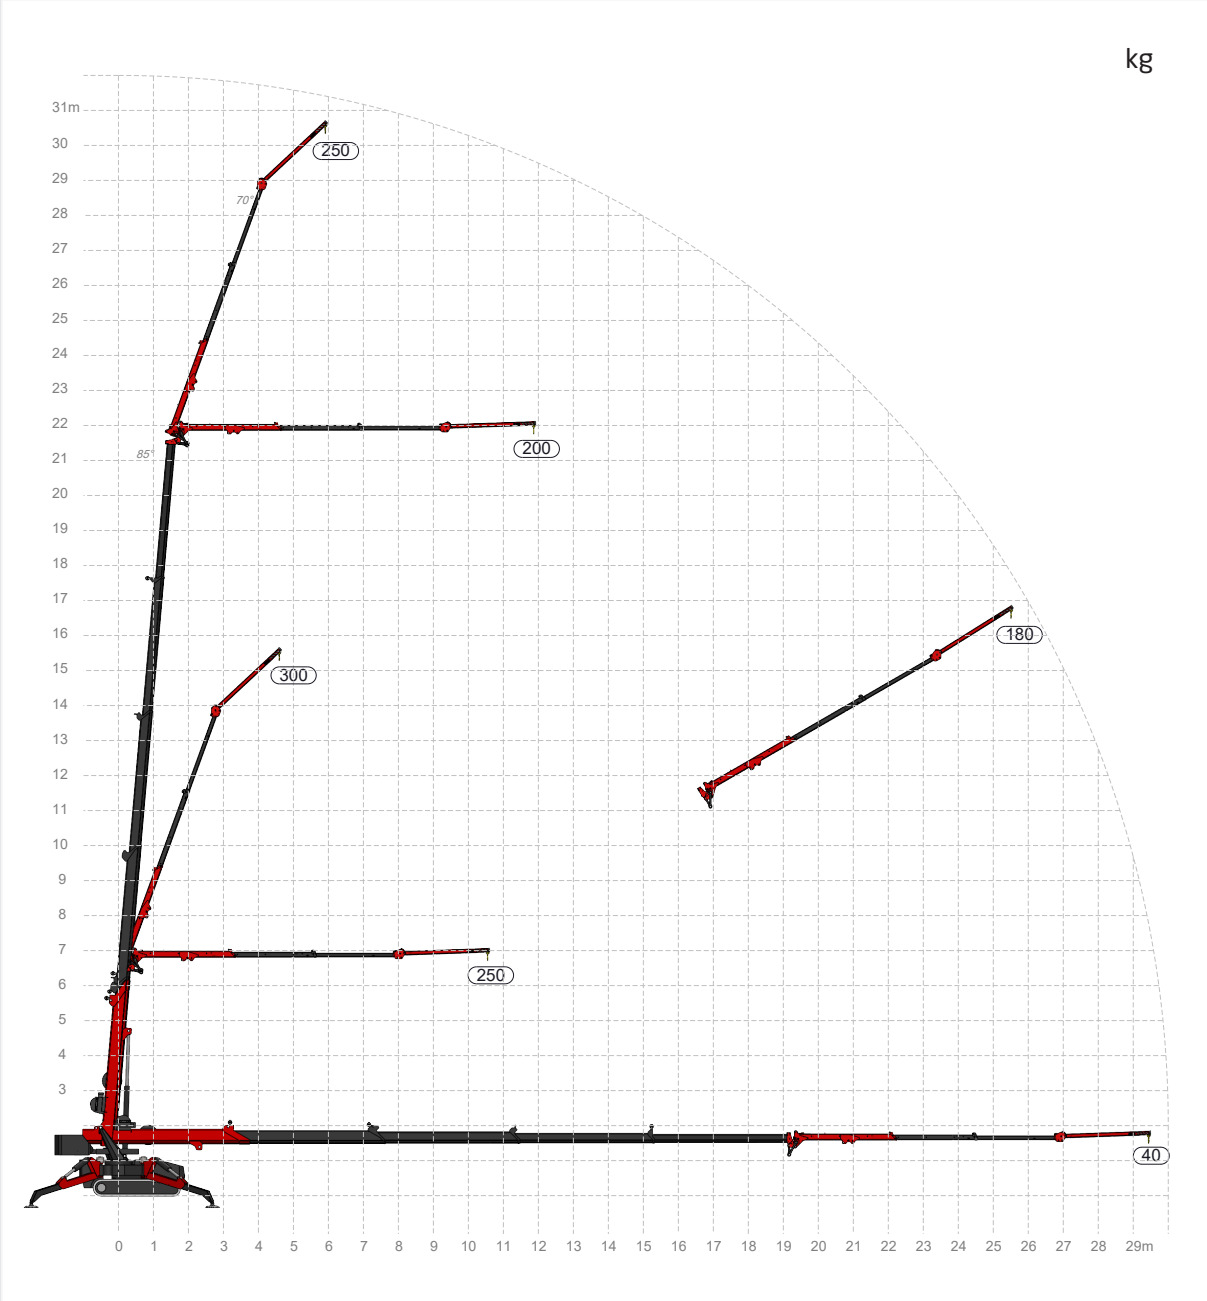

Pick & carry on main boom

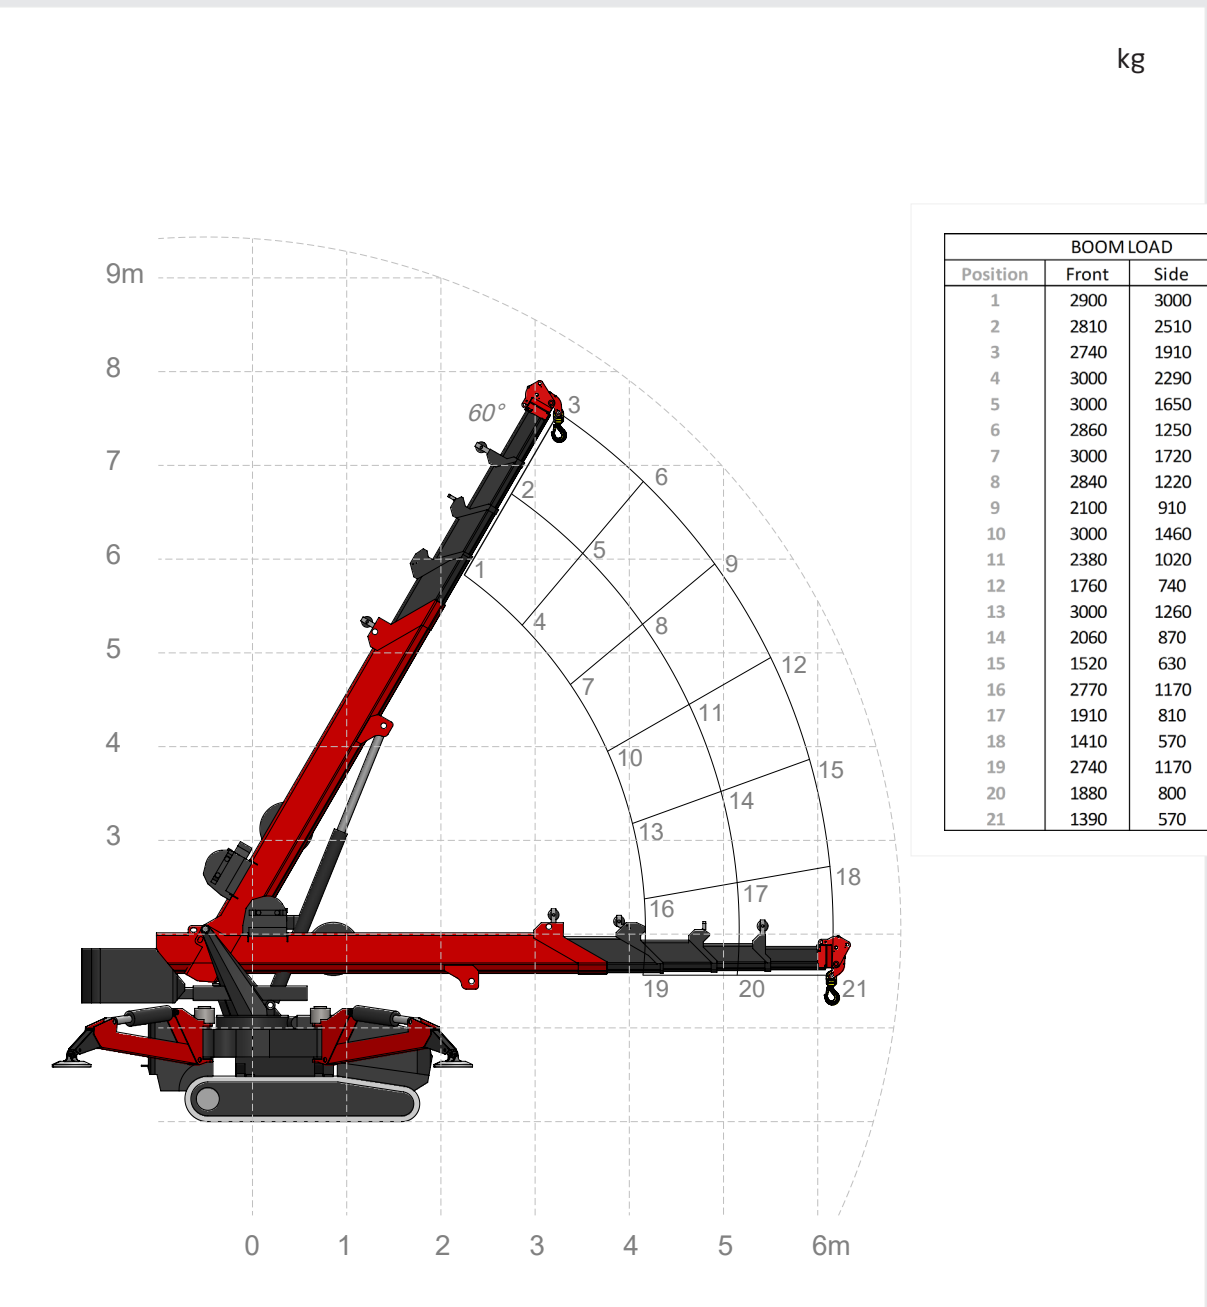

Maximum height Lifting and hoisting




Jib 2L

The jib has a weight of 335 kg and a maximum lifting capacity of 1100 kg. With a total length of 7,7 meters, it provides an extended reach for versatile lifting operations. A fixed lifting point is integrated underneath the jib, offering an increased lifting capacity of up to 2200 kg.



Manual jib extension


The manual jib extension has a load capacity of 300 kg and a length of 2,5 m. It is used in combination with lifting adapters on the crane.

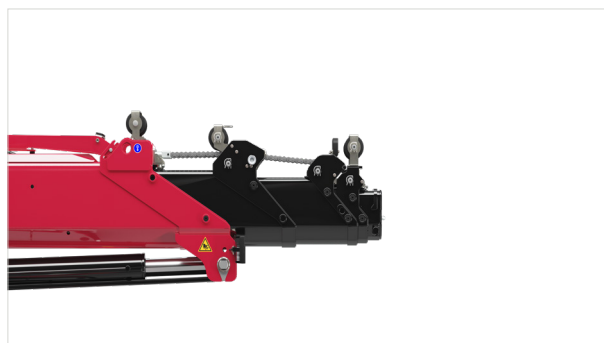

Chain locking system

By activating the chain locking system on the boom the maximum lifting capacity of 9000 kg can be utilized.

Configuration

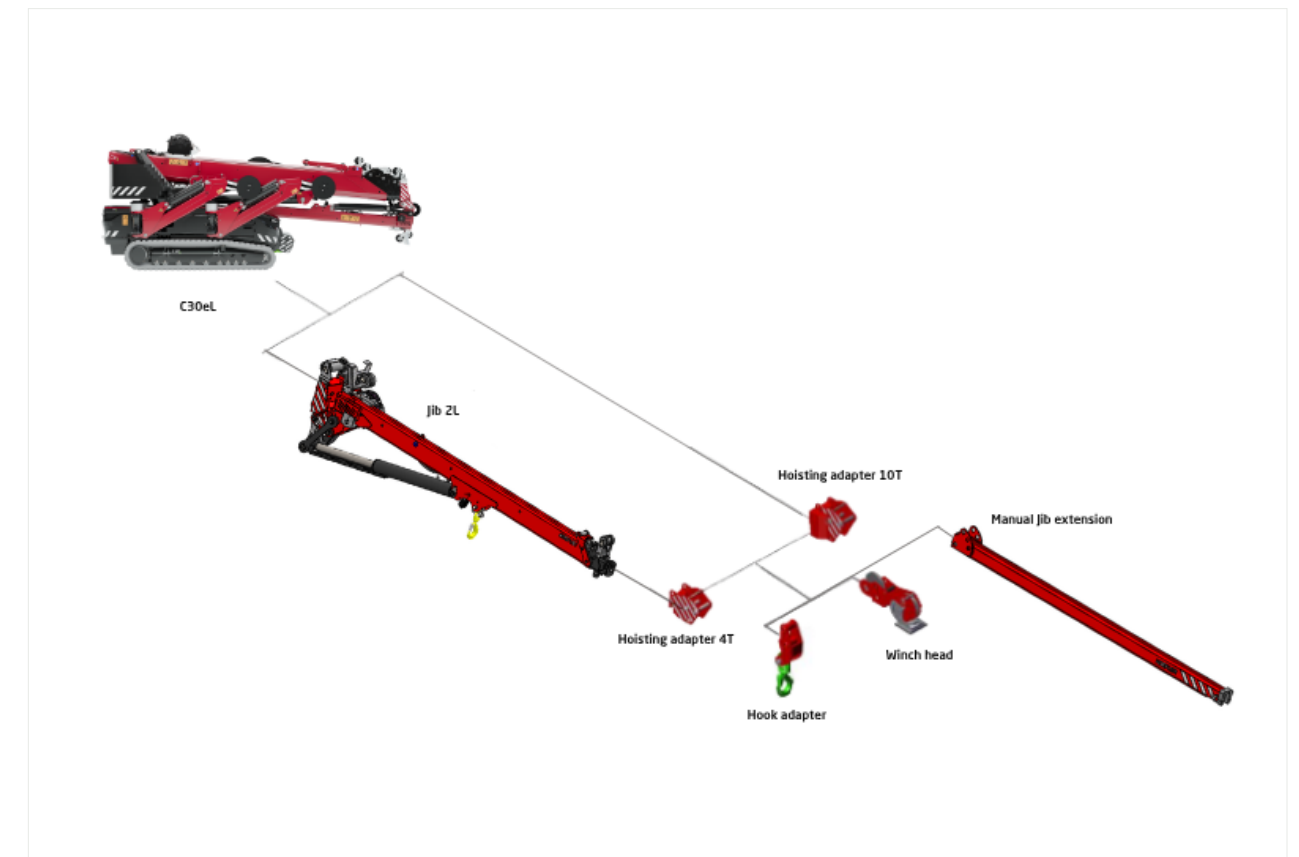

C30eL

Hoeflon International B.V.

Zwolleweg 2

3771 NR Barneveld, NL

T +31 342 400288

sales@hoeflon.com

KVK 66408962

BIC ABNANL2A

BTW NL856539806B01

IBAN NL96ABNA0457114533

www.hoeflon.com