


With the Support Grinder, type SUS, any lathe can be converted to a circular grinder. It is mounted to the upper slide in place of the tool holder. The grinding wheel is driven via a belt drive for minimum vibration. Can be customized for individual requirements prior to startup. A cost-effective, flexible and precise solution for grinding jobs in repair shops.

- Fits on a wide variety of precision lathes
- Grinding unit is clamped to the tool holder attachment bolt (SUS 210 Ø 40 mm and SUS 190 Ø 35 mm)
- Short tooling times
- Space-saving design

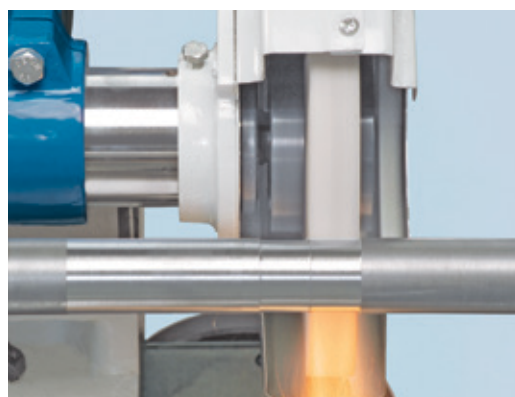

## Specifications

		SUS 190	SUS 210
Speed	1 / min	3850	3320
Motor rating main drive	kW	0,375	0,75
Overall dimensions (length x width x height)	mm	460 x 320 x 390	570 x 330 x 390
Weight	kg	26	33
Part No.		112795	112796

- Grinding wheel dimensions  
SUS 190: 175 mm x 20 mm x 32 mm  
SUS 210: 200 mm x 20 mm x 32 mm
- Grinding disc Ø  
SUS190: 175 mm  
SUS 210: 200 mm

