LAFORTE® 340 Fabric

Technical Specifications

Ph Technology	Drop on-demand Piezo ir	nkjet technology			
	Туре	2.556 nozzle - 2 colour, Water based			
Printhead	Drop Size	4pl to 72pl			
	Number of printheads	8pcs or 16pcs			
Printing Width	Max.	3400mm			
Timung Widu	Min.	100mm			
Print Mode	Resolution	600x300, 600x600,600x900, 600x1200, 900x600, 900x90 1200x1200			
	Passes	1/2/3/4/6/8 (uni and bi-directional)			
	Operating temperature	20°C to 30°C (68°F to 86°F)			
	Humidity	From 35% to 60% RH (no condensation)			
Environmental conditions	Recommended printing environment	Temperature 22°C to 28°C (71.6°F to 82.4°F) Humidity 40%			
	Recommended storage environment	16°C to 38°C (60.8°F to 100.4°F) Store the printer filled with i			
	Operating environment	Traditional place dust proof			
Ink	Tank Capacity	5kg/10Kg/20Kg			
	aleph® inks	Acid, Disperse,Reactive, Nano TX Pigment M22™			
Size	6370 (W) x 2150 (D) x 2300 (H) mm				
Weight	4800 Kg				
	Voltage	400 V ± 10%, 3 Phase + neutral + Earth, 32A			
Power	Frequency	50-60Hz			
	Power consumption	14 KW – average running consumption 7Kwh			
	Compressed air supply	8 bar			
Compressed Air	Air supply quality	Standard ISO 8573.1 – class 2,4,3			
	Air consumption	Max. 250 L/h			
Motor	Water pressure	Min. 4 bar max. 5bar			
Water	Water flow rate	Max. 50 to 100 litres per hou			
Belt system	Rotary Sticky belt				
Feeding System (standard)	Max. roll size Ø	0.5mt diameter / 200Kg			
	Pneumatic roll bar	2 inch standard (3 inch optional)			
Feeding System (optional)	Max. roll size Ø	1.5mt diameter / 1 tons			
Take Up unit	Max. roll size Ø	0.5mt diameter / 200 Kg			
Take Up unit (optional)		2 inch standard			

aleph® inks

Substrate Compatibility

	Pigment	Reactive	Acid	Disperse	
Nylon	0	0	•	0	
Nylon Lycra	0	0	•	0	
Polyester	0			•	
Silk	0	0	•		
Cotton	•	•			
Polycotton	•				
Viscose/Rayon	•	•			
Linen	•	•			
Wool	0	0	•		
•Recommended Use I o Potentia					

			•	•	_		
Ink Colou	<u>ır</u>			•Re	ecommende	d Use I o P	otential Use
Pigment in	ıks						
Black	Cyan	Magenta	Yellow	Orange	Green	Red	Violet
Reactive							
Black	Cyan	Magenta	Yellow	Red	Orange	Blue	Light Black
Acid							
Black	Cyan	Magenta	Yellow	Red	Orange	Blue	Light Black
Disperse							



2xCMYK












2xCMYK



4 colours 8 colours



16 heads / 4row / 32 colour line

Speed



8 Print Head

Jp to **570 sqm/h**

Jp to **380 sqm/h**

16 Print Head

colors

Jp to **940 sqm/h**

1x8 | 1x6 colors

Up to **630 sqm/h**

Key Features

Technology Highlights

Superior Productivity

- Up to 940 sqm/h

✓ Superior Printing Quality

- Variable drop technology - Resolution up to 1200 dpi
- Dynamic Stitching Technology (DST) for high-quality multi-pass printing

Dual-Channel Printheads

- 2 colours per printhead
- Drastically reduced maintenance costs due to the smaller number of printheads
- High speed and accurate jetting

Pioneering Media Feeding System

- Rotary sticky belt
- Advancement accuracy 40 microns
- Enabling more stability and eradicating elongation for
- superior quality

LAFORTE200

Extremely low energy consumption reducing overall sustainable impact

Distinctive Features

Anti-mist technology & solvent free printing

- Healthy environment for the operator - No solvent and glue used on belt

✓ Ink Supply System

- Automatic negative pressure control
- Negative pressure control system on each ink line - Ink tanks from 5kg to 20kg per colour
- Plug & Play Ink Tanks

Reliable and accurate motion

- Magnetic linear motor and double rail for carriage stability
- Aluminum bridge 0.02 mm torsion/deflection
- Safety system preventing printheads from collision with the substrates

Service

- Remote System Control/Assistance
- IoT Support
- Easy Maintenance

Workflow

- Interfacing with aleph, Inedit, Ergosoft, Caldera, Onyx


Compact design and robust frame





Dual-Channel Printheads

2 colours for printhead enabling high print accuracy with smaller number of printhead



Ink tank capacity: 5/10/20 kg/lt

Pioneering Media Feeding system

Rotary sticky belt Advancement accuracy 40 microns



Anti-mist technology &

Solvent-free printing

User-friendly Touch Panel and Ethernet 1/10 GB Interface

Low power consumption





aleph

^{*} All the printing speeds have been calculated based on 3000mm-width printer and may vary depending on the substrates, the level of the quality and the selected print width.

Integrated Production Line



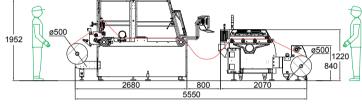

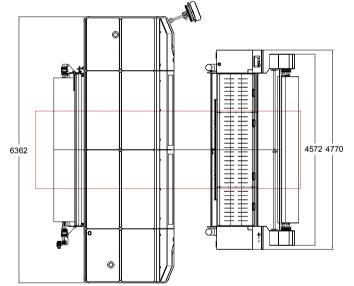

Full-line Configuration

- The setting is available for all printer models
- Accessories are available as optional

aleph

In printing, we care

aleph specialises in developing and manufacturing advanced direct-to-fabric and direct to paper inkjet printers for the textile and visual communication industries and provides its customers with total, integrated solutions.

Founded in 1999 and headquartered at the heart of the Italian textile district of Como, the company has grown to become one of the leading international players in the digital printing space. With a dedicated sales force and a widespread distribution network, aleph operates in key textile and out-of-home markets across the globe.

The company's extensive experience in the textile industry has enabled aleph to progressively expand the offer and boost the service, with the final goal to actively contribute to customers' success. aleph offers integrated printing solutions, featuring proprietary software, cutting-edge digital printers, as well as drying systems and consumables.

aleph's green policy focuses on environmental and social sustainability. With the company steadily focused on innovation, aleph's customers can benefit from cost-effective technologies with reduced environmental impact and designed to increase the users' green reputation.



LAFORTE Fabric® Series









A Special Printer Tailored to Special Home Textiles

