

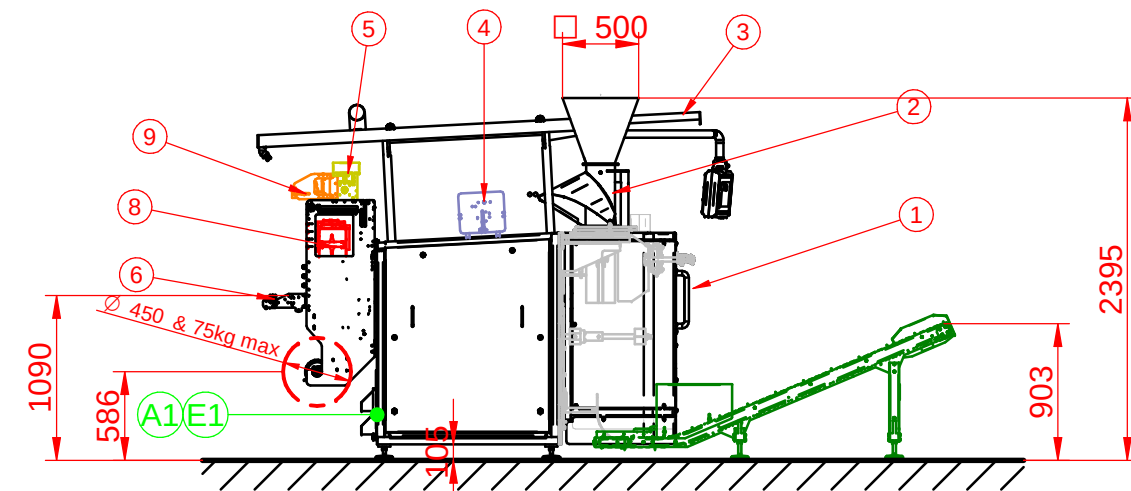


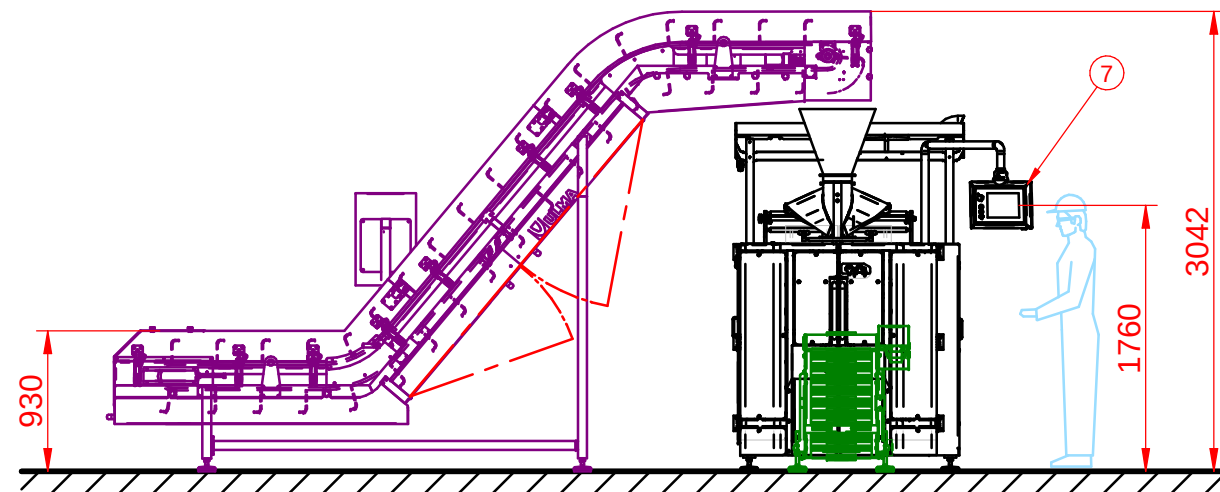

MINIMUM DISTANCE 500MM FOR MAINTENANCE.
THIS MINIMUM CAN CHANGE DEPENDING ON OPTIONALS
(IN CASE OF CANTILEVER OR TROLLEY, THE DISTANCE IS
1000MM). CONTACT IN CASE OF DOUBTS

REEL LOAD POSITION

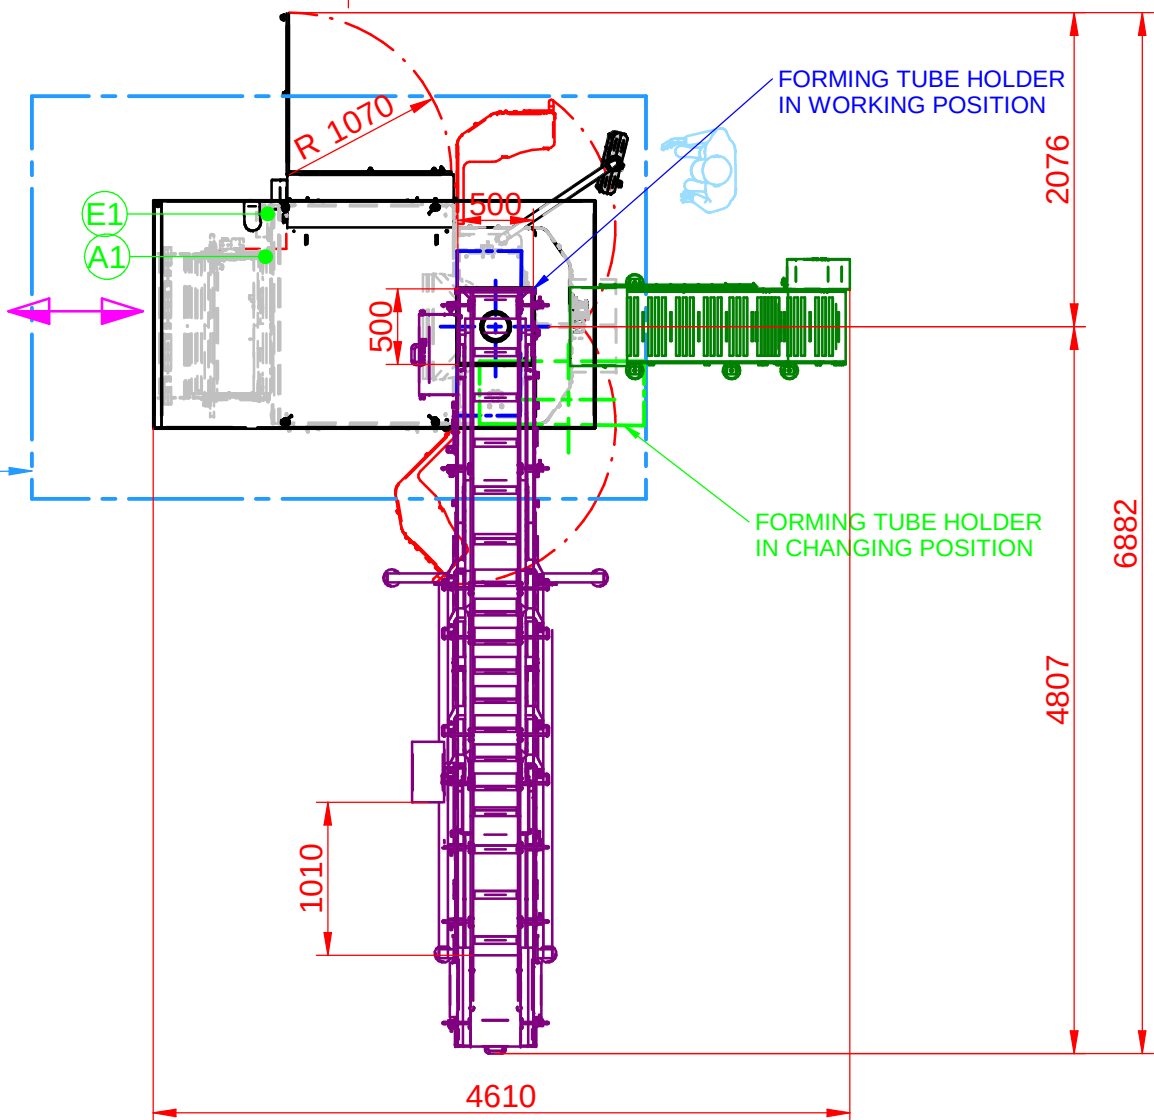

- 1.- VFFS machine
- 2.- Forming tube
- 3.- Film protection cover
- 4.- Black spot reader
- 5.- Tension control device
- 6.- Splicing station
- 7.- Control panel
- 8.- Codifier
- 9.- Perforator

VTC 840 → E1 POWER SUPPLY A1 PNEUMATIC SUPPLY

Orientative measures

VTC 840



Realizado por Drawn by Realise par	A.GARCIA DE CORTAZAR	Aprobado por Allowed by Approuvé par	A.GARCIA DE CORTAZAR
PROYECTO / PROJECT / PROJET		600695	
Cliente Customer Client		ULMA PACKAGING GMBH	
Fecha Date	15/04/2025	Escala Scale Echelle	Ref. 3425_01