



Power Generator FD 32 B-C

Code: F.0032.4.BA-C1920T200-02


Engine


Alternator

Manufacturer	Leroy Sommer
Type	TAL 042 C
Made in	Czech Republic
Nominal Voltage	400 V
Nominal power factor (cos φ)	0,8
Ambient temperature, altitude	40 °C, 1000 m a.s.l.
Nominal Power	32,0 kVA
Protection index	IP 23
No of bearing	Single bearing
Coupling	Direct
Technology	Brushless
Short circuit maintaining capacity	270% 10s
Efficiency	87,6 %
Insulation class	H
Total harmonic content THD	<2 %
Reactance Xd"	8,1 %
Voltage regulator type	AVR, digital
Voltage measurement	3 phase
Voltage accuracy	+/- 0,25 %
AVR supply system	AREP+
AVR supply optional	PMG

Controller

- Controller type: ComAp IntelliLite AMF 25
- Support of Dual AMF/MRS applications
- Direct communication with EFI engines
- Total remote monitoring and control
- Intuitive operator interface, adjustable Main Screen
- Real time clock
- Comprehensive history log with up to 350 events
- 3 phase true RMS current and voltage measurement
- Both mains and generator voltage detection
- Active/Reactive Power and Power Factor per phase measurement
- Run Hours counter with source selector
- 3 maintenance timers (counting even under zero)
- Multipurpose flexible timers (also for rental)
- Battery voltage measurement
- Complete engine and alternator protection
- CAN modules support
- USB port on-board
- 2 slots for plug-in modules
- Plug-in module concept for more capabilities (RS232, RS485, Ethernet, GPRS, 4G/LTE, Modbus, SNMP, emails, SMS, I/Os)
- Cloud-based monitoring and control via WebSupervisor (optional module required)
- Geofencing and tracking via WebSupervisor (optional module required)
- Control and monitoring over SMS (GSM module required)
- 3 levels of password protection
- In-built PLC, complemented with a monitoring/debugging tool, for additional functionality, if required
- Spare inputs and outputs available by default: binary input – 2, binary output – 1, analogue input – 3,
- A version for low temperature is also available

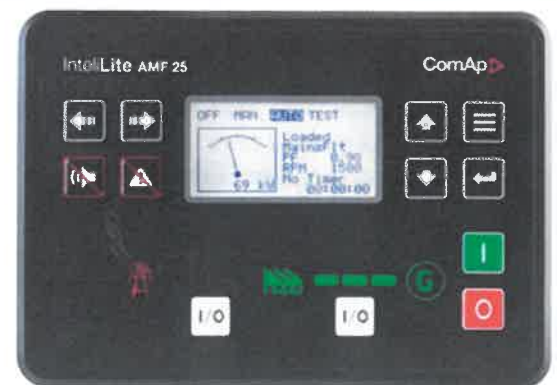

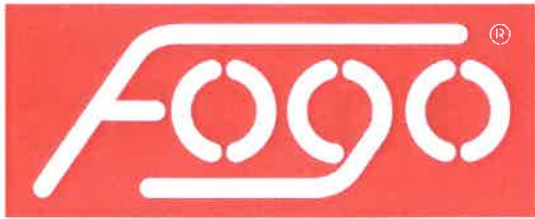

Power Generator

FD 32 B-C

Code: F.0032.4.BA-C1920T200-02



Picture for reference only

Main Features

- Digital voltage regulation $\pm 0,25\%$
- Three phase voltage control
- Low disturbance level THD $<2\%$
- Alternator short circuit capacity $270\% I_n$ (optional 300%)
- Class H insulation
- Protection index IP23
- Performance class G3 (acc. ISO 8528-5)
- Ready to load just after start
- AMF and MRS functionality and protection
- Autonomy 31,5 h with 75 % load
- Compact design
- Forklift manouvable from the front and side wall

General Data

Maximum power ESP	35,0 kVA / 28,0 kW
Nominal power PRP	31,0 kVA / 25,0 kW
Nominal Current PRP	45,0 A
Frequency	50 Hz
Voltage	400 V
Emission standard	non-emission
Fuel	Diesel (EN 590)
Fuel tank capacity	200 l
Fuel consumption @ 50% / 75% 100% /110% PRP	4 / 5,7 / 7,6 / 8,4 l/h
Autonomy @ 75% / 100% load	31,5 / 23,6 h
Weight without fuel	~820 kg
Dimensions L x W x H	1920 x 1020 x 1600 mm
Guaranteed noise power L_{wa}	90 dBA
Acoustic pressure @7mL_{pa}	60,5 $\pm$ 1 dBA

Main Components & Equipment

- Leroy Sommer TAL 042 C alternator
- Brushless alternator
- Digital AVR
- ComAp IL-AMF25 Controller
- Schneider Z50/4 type generator circuit breaker
- GCB shunt release coil
- Linear automatic battery charger
- Engine heater
- Electronic speed governor
- Fuel system direct injection
- Welded frame with 200 l fuel tank, spill containment and noise insulation
- Two fuel inlets
- Four lifting eyes
- Extended forklift skids for easy attachment to the ground

For details see page 3

Definitions

Nominal Power PRP:

Prime power available in variable load application in accordance with ISO 8528, 10% overload capacity is available for a period of 1 hour within a 12-hour period of operation. Average power consumption should not exceed 70% PRP for each 24h of operation. operation

Maximum power ESP:

Standby power rating is applicable for supplying emergency power for the duration of a utility power interruption. No overload allowed, average power consumption should not exceed 70% ESP. Limited to 500h of operation per year including 25 hours with ESP.

Norms and Directives

- Machinery directive 2006/42/EC
- Low voltage directive 2014/35/EU
- EMC directive 2014/30/EU
- Noise directive 2000/14/EC
- ISO 8528-1/2018, ISO 8528-5/2022
- ISO 8528-13:2016
- IEC 60204-1

Contact data

FOGO Sp. z o.o.

Święciechowska 36, 64-115 Wilkowice
agregaty@fogo.pl, www.fogo.pl