




TRUCK MOUNTED CONCRETE PUMP EU-A 36X-5Z (H leg)

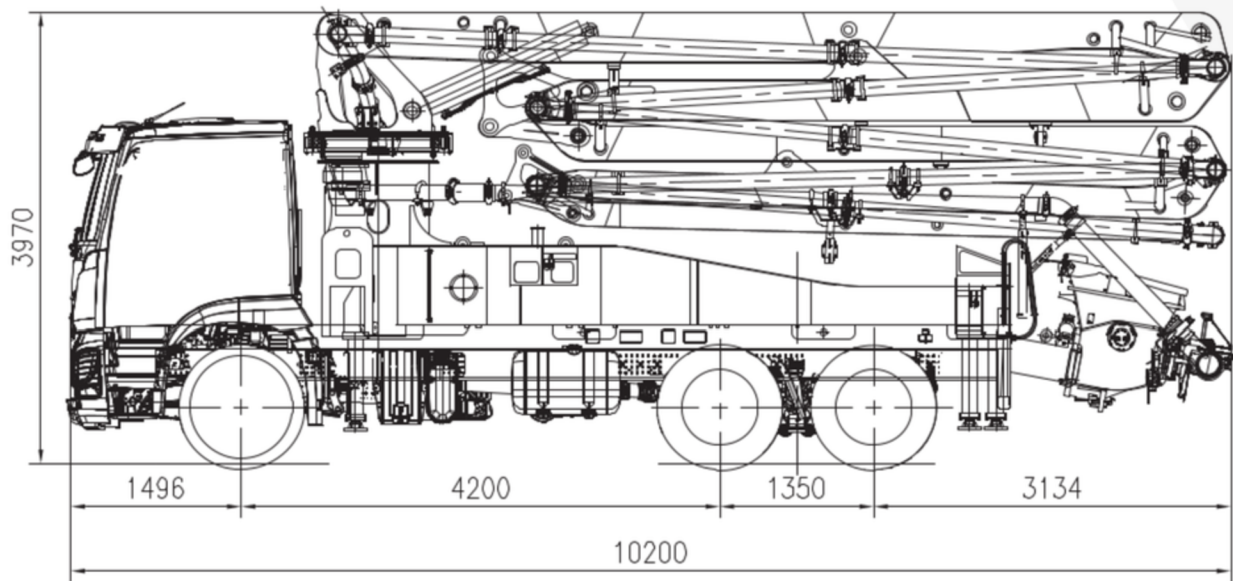

Note: Standard version. Dimensions and weights depend on truck, pump model and equipment.



Dimensions in mm. Example based on Mercedes- Benz Arocs 5 2643.
For illustration only. Actual products may vary.

Technical Specifications

BOOM	UNIT	
Reach height	m	35.50
Horizontal reach (gross/net)	m	31.20 / 28.39
Reach depth	m	23.30
Unfolding height	m	6.90
Sections	/	5
Folding system	/	Z
End hose length	m	3
Delivery line	mm	DN 125
PUMP		
Max. output	m ³ /h	184
Max. pressure	bar	83
Delivery cylinder	mm	Ø260
Stroke	mm	2100

*All data are maximum theoretical values.

Reach information diagram, support

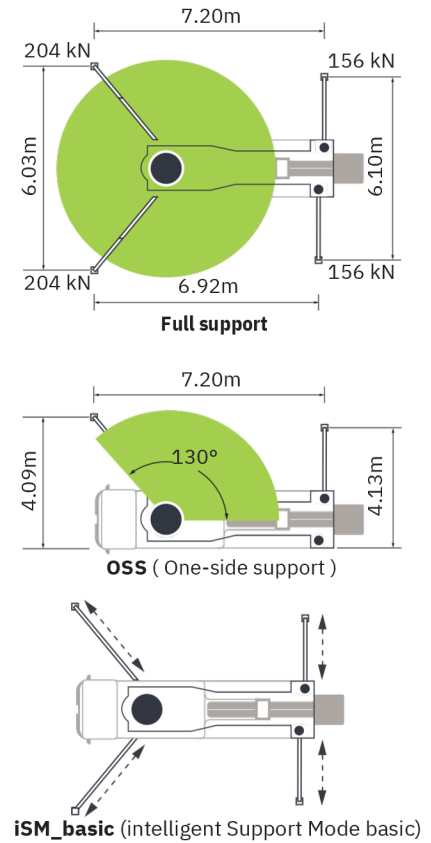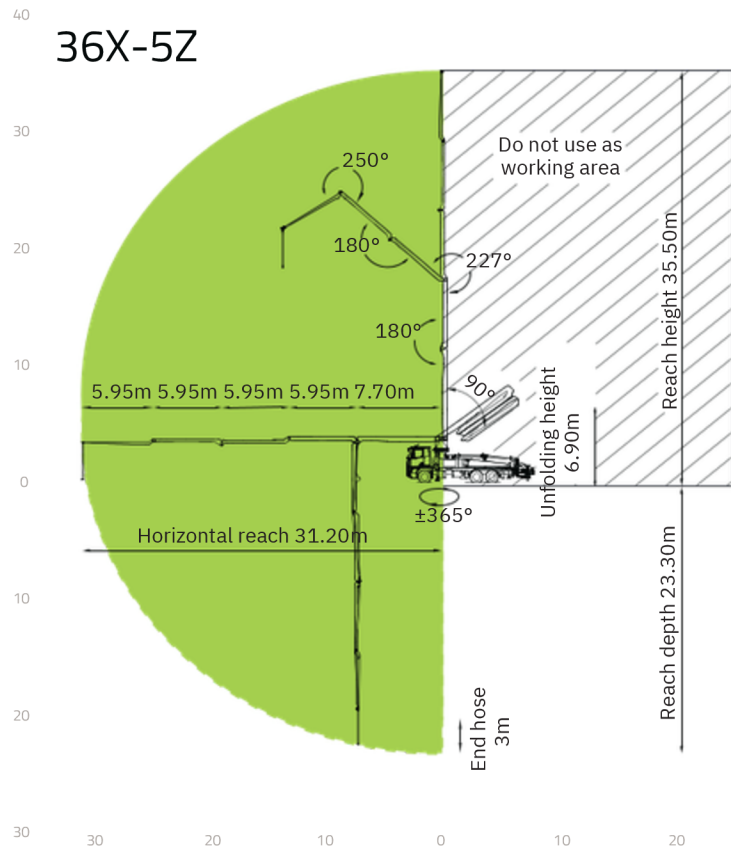

Configurations (Optional★)

Pumping System APC (Accurate Pumping Control) CPC (Condition-adaptive Pumping Control) MPC (Multi-mode Pumping Control) ECO (Eco. Pumping) Synchronized dual-concrete piston retraction	Support SSM (Standard Support Mode)(Full Support/OSS/FS/LF/RF) iSM (intelligent Support Mode)
Hopper Streamline hopper Compressed air for oil sprayer Aluminium alloy hopper cover Bar-type grille Hopper vibrator Cleaning ball stopper Chrome-plated concrete cylinder Wear-resistant S pipe Carbide wear plate Labour-saving device for hopper cover Quick-release concrete piston Automatic forward/reverse agitator rotation S-valve swinging speed control	Placing Boom OBF (One-joystick Boom Fold/Unfold) OBP (One-joystick Boom Place) ARC (Active Boom Rotation Control) iMMC (intelligent Multi-arm Motion Control) Skeleton slewing table for easy maintenance
Cleaning Water tank, 700L Water pump, 70L/min, 13bar Water pump, 15L/min, 150bar Hose reel for high pressure water pump, 20m Quick-connect water inlet	Delivery Line Self-locking end hose clamp Snap pipe coupling End hose, 3m, DN 125 Double-layer pipes
	Lighting Boom tip light, LED Boom light, LED Hopper light, LED Rear hopper light, LED Baseframe access light, LED Support area spotlight, LED Support indicator light, LED Tipping warning light, LED Pumping warning light, LED Slewing warning light, LED

Stop light, LED Height-marker lamp, LED Side-marker lamp, LED
Safety 360° surround camera system OGS (Outriggers Guidance System) LBS (Lock Boom System) PAW (Placing Area Warning)+ GSW (Ground Support Warning) Emergency pumping reverse Emergency hydraulic power interface for boom and outrigger End hose squeeze valve, operable by remote control Platform handrail
Digital Management ZOOMLINK APP
Operation and Maintenance Spacious platform for service access Hose rack on outrigger Diesel tank in rear outrigger Central grease lubrication system Mushroom button for horn Dual radio remote controls Remote engine off Remote engine start OTA (Over-the-Air Update) Self-diagnosis and monitoring

REMMEL AG

Registered Office
Im Zollhafen 24, 50678 Köln

Branches
Moselbahnstraße 2, 54470 Bernkastel-Kues

CEO: Thorsten Remmel
Phone: +49 172 6990282
E-Mail: info@remmel-ag
Homepage: www.remmel-ag.com
USt-idNr.: DE328405047
Handelsregister: Amtsgericht Köln - HRB 100861