



Multi-Fruit Juicer



Recognized around the world as the most reliable and versatile juicer

Juice Quality

The basic principle of instantaneous separation is the major reason for the superior quality juice delivered by the Fresh'n Squeeze® Multi-Fruit Juicer. The juicer separates the juice from those peel and albedo constituents which, if allowed to be together for any period of time, have an adverse affect on the product. Quality is also assured through the sanitary design of the juicing components.

Juice Yield

The Fresh'n Squeeze Multi-Fruit Juicer yields more juice per unit of fruit than any other citrus processing equipment. Its unique design allows the juicer to handle a variety of fruit sizes and most of the world's citrus varieties including oranges, grapefruit, lemons, limes and tangerines.



Those making the juice want:

- High quality juice with minimal peel oil
- Reliable, easy to operate and safe equipment that processes a wide range of types and sizes of citrus fruits
- A juicer that achieves the highest juice yields from all fruits – at a reasonable speed

Consumers of Fresh Juice Expect:

- Sweet tasting, freshly squeezed juice made daily
- Good value for the price
- Nothing but juice – no seeds, no peel
- To see the juicing process in action
- A sanitary design to ensure product quality and shelf life

Delivers the best tasting juice at the highest possible yields.

Fresh'n Squeeze® Multi-Fruit Juicer



Technical Specifications

(metric shown in brackets)

Throughput	20 fruit per minute
Fruit Hopper Capacity	40 lbs. (18 kg) – 1 carton
Processing Speed	80-120 quarts (76-114 liters) per hour
Reservoir Capacity	3-1/2 gallons (13 liters)
Juicer Dimensions	Height 67" (170 cm)...Width 27" (69 cm)...Depth 32" (81 cm)
Shipping Dimensions	Height 73" (186 cm)...Width 30" (76 cm)...Depth 36" (91 cm)
Electrical Requirements (USA)	115 volts...60 Hz...20 amp service...single phase
Electrical Requirements (Export Models)	110/220 volts...50/60 Hz ...20/10 amps service...single phase (Dedicated Circuit Required)
Safety Features	Completely enclosed, safety interlock switches
Finish	High impact, flame retardant ABS or stainless steel (optional)
Weight	535 lbs. (243 kg)...Shipping Wt. 570 lbs. (259 kg)
Waste Container Holds	40 lbs. (18 kg)

Standard Citrus Juicing Components

Average Fruit Size	2-1/2" (63.5 mm) to 3-7/8" (98 mm)
Orange Count	Per 40 lb. (18 kg) Carton...138 to 48
Grapefruit Count	Per 40 lb. (18 kg) Carton...56 to 48
Lemons, Limes Count	Per 40 lb. (18 kg) Carton...200 to 95
Versatility	Juices all types of citrus fruit without adjustment
Optional	Strainer tubes for various juice pulp requirements

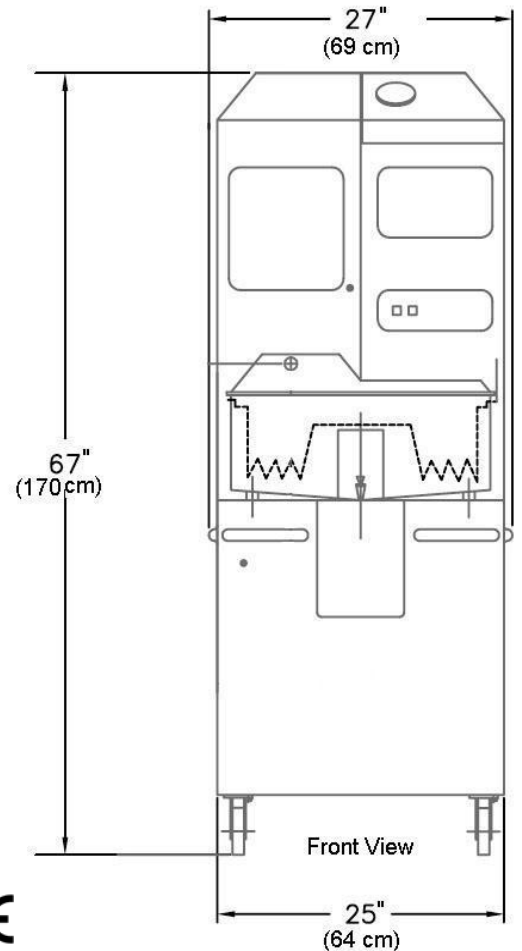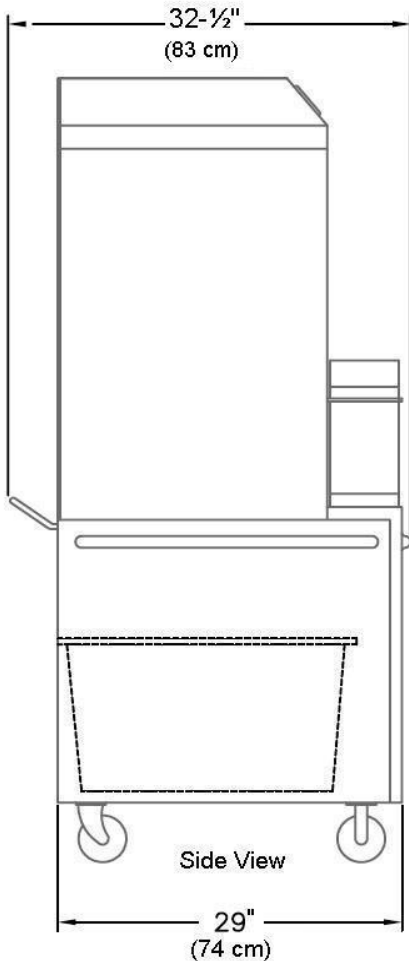

Copyright © John Bean Technologies Corporation 2008

JBT FoodTech
 400 Fairway Avenue
 Lakeland, FL 33801
 +1 863 683 5411



We are your single source for profitable processing solutions

JBT FoodTech can provide you with portioners, freezers, and everything in between – including process control, food product development assistance, operator training and a full range of customer support alternatives.

Our Food Technology Centers have served leading processors in development of many of the world's most popular food brands. Learn how to increase your processing potential by contacting your JBT FoodTech representative or by visiting our website.

www.jbtfoodtech.com



www.jbtfoodtech.com

North America

JBT FoodTech
400 Fairway Ave
Lakeland, FL 33801
USA
Phone: +1 863 683 5411
Fax: +1 863 680 3672

Brazil

JBT Máquinas e Equipamentos
Industriais Ltda.
Av. Eng. Camilo Dinucci 4605
14808-900 Araraquara
São Paulo Brazil
Phone: +55 16 3301 2000
Fax: +55 16 3332 0565

Europe

JBT FoodTech, S.L.
Julián Camarillo 26, 4º
28037 Madrid Spain
Phone: +34 91 304 00 45
Fax: +34 91 327 50 03

Latin America

JBT FoodTech
Carr. Mty-Salttillo Km 7—Bodega 4
Colonia Las Mitras
Santa Catarina, NL
Mexico 66350
Phone: +52 81 81 23 70 55
Fax: +52 81 81 23 70 54

South Africa

JBT (Pty) Ltd.
Koper Street
Brackenfell
Cape Town, South Africa 7560
Phone: +27 21 982 1130
Fax: +27 21 982 1136

Asia / Pacific

JBT (Shanghai) Co. Ltd.
Room 3002-3003
Haitong Security Building
No. 689 Guangdong Road
Shanghai 200001,
China
Phone: +86 21 6341 1616
Fax: +86 21 6341 0708