WELDEX F-150

(665.150)

Voltage	(V)	400	Filter surface	(m^2)	150
Motor	(kW)	15	No. of filter elments	(pc)	4
Ampere	(A)	29	Filter material		Polyester M antistatic
Rated frequency	(Hz)	50	Weight	(kg)	ca. 755
Fuse	(A)	50	Intake	(mm)	500
Max. neg. pressure	(Pa)	4.500	Clean air discharge	(mm)	710
Max. airflow	(m^3/h)	15.000	Dimensions (l x w x h)	(mm)	1.000 x 1.600 x 3.320
No. of magnet valve	(pc)	4	Dust collection bin	(Liter)	ca. 60
Sound Level	(dBA)	80	Compressed air connection	(inch)	¼“



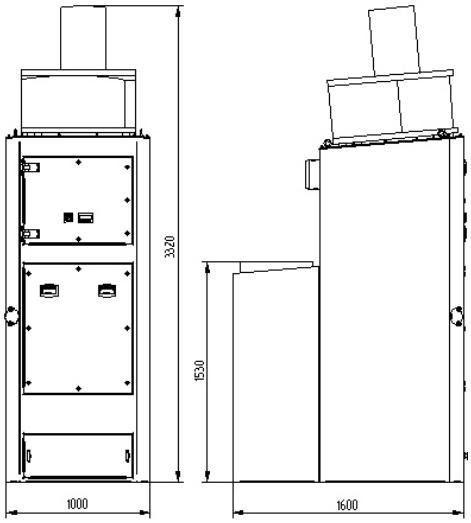


Image: sound insulation hood in special model

ESTA PLUS

Application range:

Central systems with multiple extraction locations
Large extraction hoods or cells, e.g. robotic welding stations
All types of steel

Your benefits at a glance

High performance welding fume extraction from multiple locations, from welding cells or from large extraction hoods
Application specific design of the system
Modular for future expansion
Low operating costs with cleanable long life filter cartridges

Characteristics:

Pulse-jet filter cleaning system
Integrated impact separator
Cleanable long life cartridge filters of dust classification M

State of the art: 665150-51-03 Subject to change without notice! For remaining questions please do not hesitate to contact us.

ESTA Apparatebau GmbH & Co. KG
Gotenstraße 2 – 6
D – 89250 Senden

Tel: + 49 (0) 73 07 80 4 - 0
Fax: + 49 (0) 73 07 80 4 - 500
E-Mail: info@esta.com

www.esta.com