


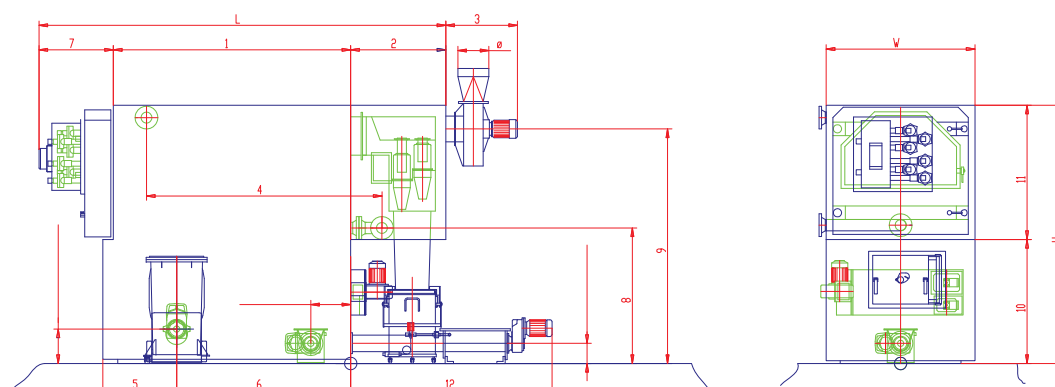

HPKI-K 180 - 2000, HPKI-R 150-5000 and HPKI-W 300 - 1600

HPKI-R 150-5000 - Forward feed firing - Air cooled

Type	Output in kW	L	W	H	Flow/Return	Weight total in tons	Water in litre	Flow coefficient in m³/h
150	150	2890	950	2420	50	3.97	290	30
180	180	2990	1150	2600	65	4.75	830	48
240	240	3190	1150	2600	65	4.8	830	48
300	300	3450	1250	2650	80	5.6	1100	72
360	360	3450	1250	2650	80	5.6	1100	72
450	450	3950	1440	2900	100	9.5	1550	110
550	550	3950	1440	2900	100	9.5	1550	110
700	700	4620	1800	3550	100	14.6	2550	182
900	900	4620	1800	3550	100	14.7	2550	182
1200	1200	4990	2000	4050	125	22.2	3450	283
1600	1600	5590	2000	4100	150	24.7	3650	363
2000	2000	6250	2320	4950	200	27.8	5200	485
2400	2400	6850	2320	4950	200	36.0	6050	515
3200	3200	7910	2800	6800	200	61.5	14300	640
4200	4200	9090	2800	7000	250	72.0	21600	840
5000	5000	10810	2800	8100	250	97.0	21600	1100

HPKI-W 300 - 1600 - Forward feed firing - Water cooled

Type	Output in kW	L	W	H	Flow/Return	Weight total in tons	Water in litre	Flow coefficient in m³/h
300	300	3450	1250	3000	80	7200	1700	72
360	360	3450	1250	3000	80	7200	1700	72
450	450	3950	1440	3300	100	10650	2350	110
550	550	3950	1440	3300	100	10650	2350	110
700	700	4620	1600	4100	100	15900	3850	182
900	900	4620	1600	4100	100	16000	3850	182
1200	1200	4990	1800	4800	125	21150	5550	283
1600	1600	5590	1800	4950	150	25000	6100	363