


STATIONARY SLEWING JIB CRANE

with manual slewing

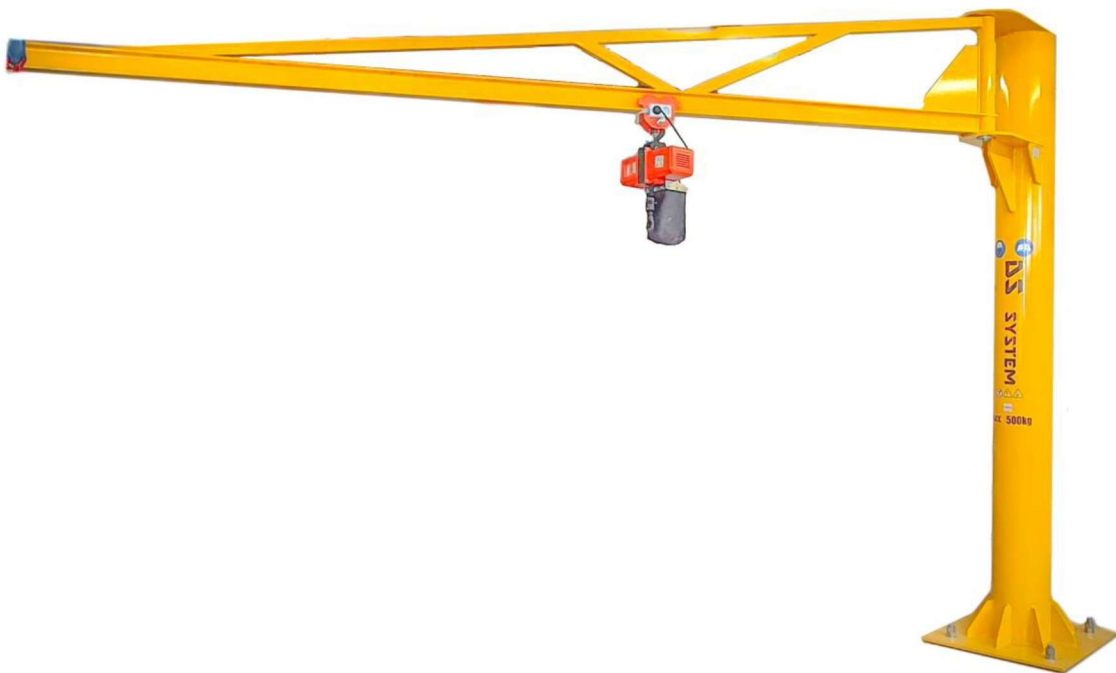

TECHNICAL SPECIFICATIONS:

- column height: **3 m**
- lifting height of the load: **1.8 m**
- jib arm length: **4 m**
- load capacity: **700 kg**
- slewing range: **270 degrees**
- lifting speed: **approx. 5 m/min – 10 m/min***
- colour: any from the **RAL colour palette**
- slewing operation: **manual**
- **quadruple** needle-bearing-mounted arm for smooth rotation
- wire rope hoist: **electric**

- trolley: **manual**

INCLUDED IN THE PRICE:

- pillar jib crane
- electric hoist – single-phase
- manual trolley
- **transport**
- **installation** (following site inspection and selection of a suitable foundation)
- complete documentation

VACUUM LIFTER – STEEL SYSTEM DS 850 FOR TRANSPORTING SHEET METAL

TECHNICAL SPECIFICATIONS:

- **8 pcs.** of SPU suction cups by **Schmalz**
- Each suction cup is fitted with a ball valve
- Individual adjustment of each suction cup
- **Control** of the lifter from the control panel – **lifter console**:
 - Pump unit ON / OFF
 - Vacuum suction / release
 - Electric hoist control – lifting / lowering
- Pressure gauge
- Adjustment on the X and Y axes
- Power supply: pneumatic pump unit with permanent 230 V supply
- Load capacity: **600 kg**
- Unit weight: **80 kg**