
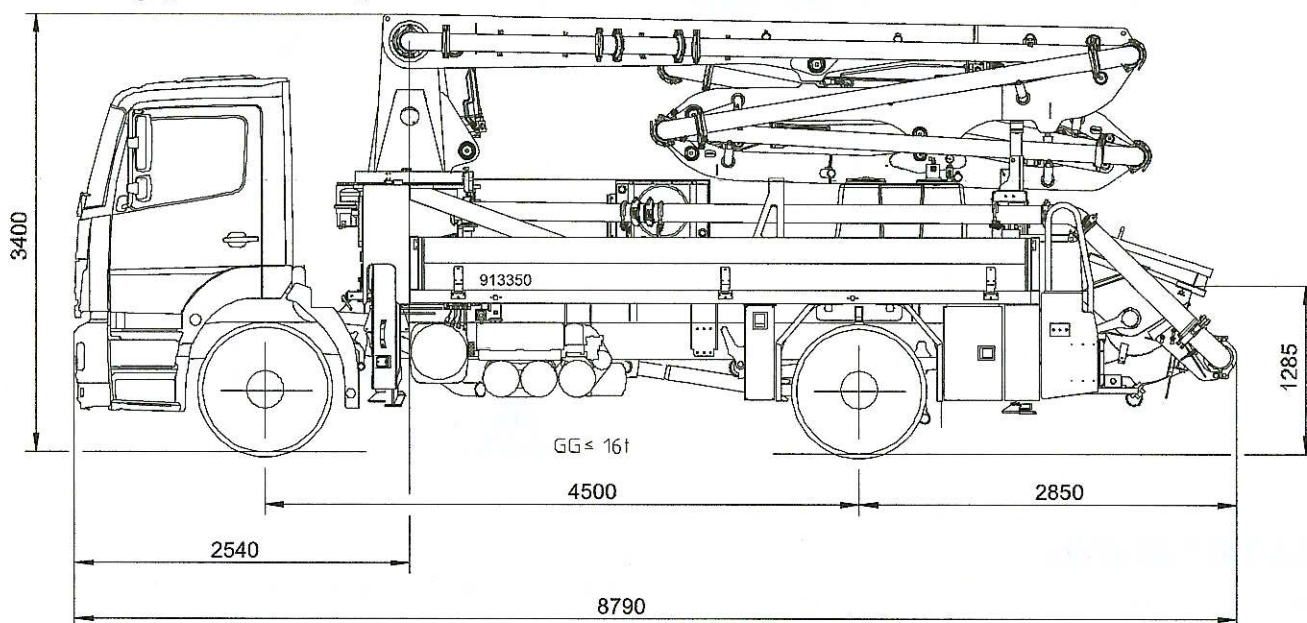


Truck-mounted concrete pump

BSF 20-4.09 H

Output up to 90 m³/h

Delivery pressure up to 78 bar



Note: Standard version. Dimensions and weights depend on truck and equipment.
Dimensions in mm, MB-Axor 1828 as example


Technical Data

Boom M 20-4			
Sections			4
Reach height	m		19.5
Horizontal reach	gross	m	16.1
	net	m	13.8
Reach depth max.	m		11.1
Unfolding height	m		3.9
End hose length	m		3
Folding system			ZR
Delivery line			DN 125

Pump		BSF	.09 H
Rod side	Output	m ³ /h	-
	Delivery pressure	bar	-
	Strokes	1/min.	-
Piston side	Output	m ³ /h	90
	Delivery pressure	bar	78
	Strokes	1/min.	26
	Delivery cylinder	Ø mm	230
	Stroke	mm	1400

All data maximum theoretical.

Reach information diagram, Support, Performance diagram

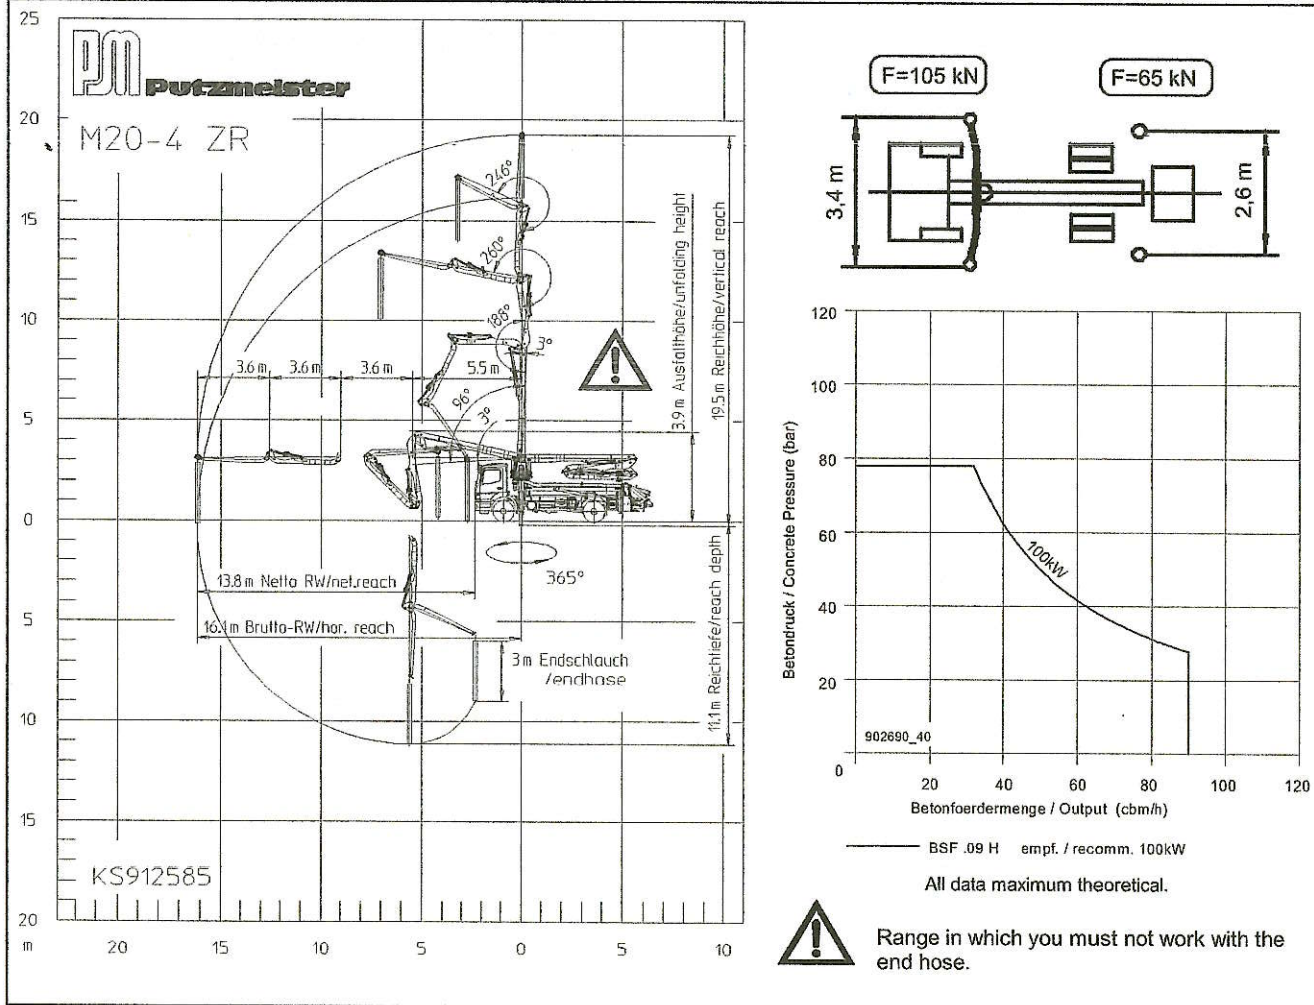

Serial delivery scope

agitator and water pump radio remote/on site controlled
boom pedestal TR
boom rear light 24 V
cardan shaft maintenance free
central lubrication strip hopper
chassis horn via remote control on hopper
connections for hydraulic emergency supply
C-pipe connection for filling water tank
delivery cylinder chrome-plated
delivery line (1-layer) PM40, arm assembly
delivery piston "compact"
diagnose interface
end hose 3,0 m DN 125, 5,5"
Ergonic Graphic Display (EGD) with machine fault management
Ergonic Pump System (EPS) incl. Ergonic Output Control (EOC)
flushing water pump 160 l/min 25 bar
hand working search light lighting hopper, detachable
hydraulic hose for replacement in hose pack
operating manuals 2x cert. (1x paper, 1x CD-ROM) spare part list

painting: pump MB 1227 chrome yellow
painting: arm assembly RAL 3020 signalred
platform non-skid
pump on/off dependent on speed
radio remote control proportional with display
remote control with 25m cable, without display
RS 600 with S 2015D and slewable 90° elbow
rubber collar on hopper
side panel left foldable
side panel right foldable
spectacle wear plate DURO 22
splash guard fixed
spray hose 10 m incl. bracket
S-transfer tube switchover fast/slow
support plates (4x) in magazine (2x) open
Tool set incl. standard equipment
towing eye
water supply, hopper (1/2")
water tank 610 l

See quotation for exact serial delivery scope.

Comprehensive range of options available on request.